


REV.	DESCRIPTION	DATE	BY	APP'D.
	FRONT HOLES WERE 1 1/4 DIA (2) PLACES & REAR HOLES WERE 1 1/8 DIA (5) PLACES	2/97	dck	RW/RV

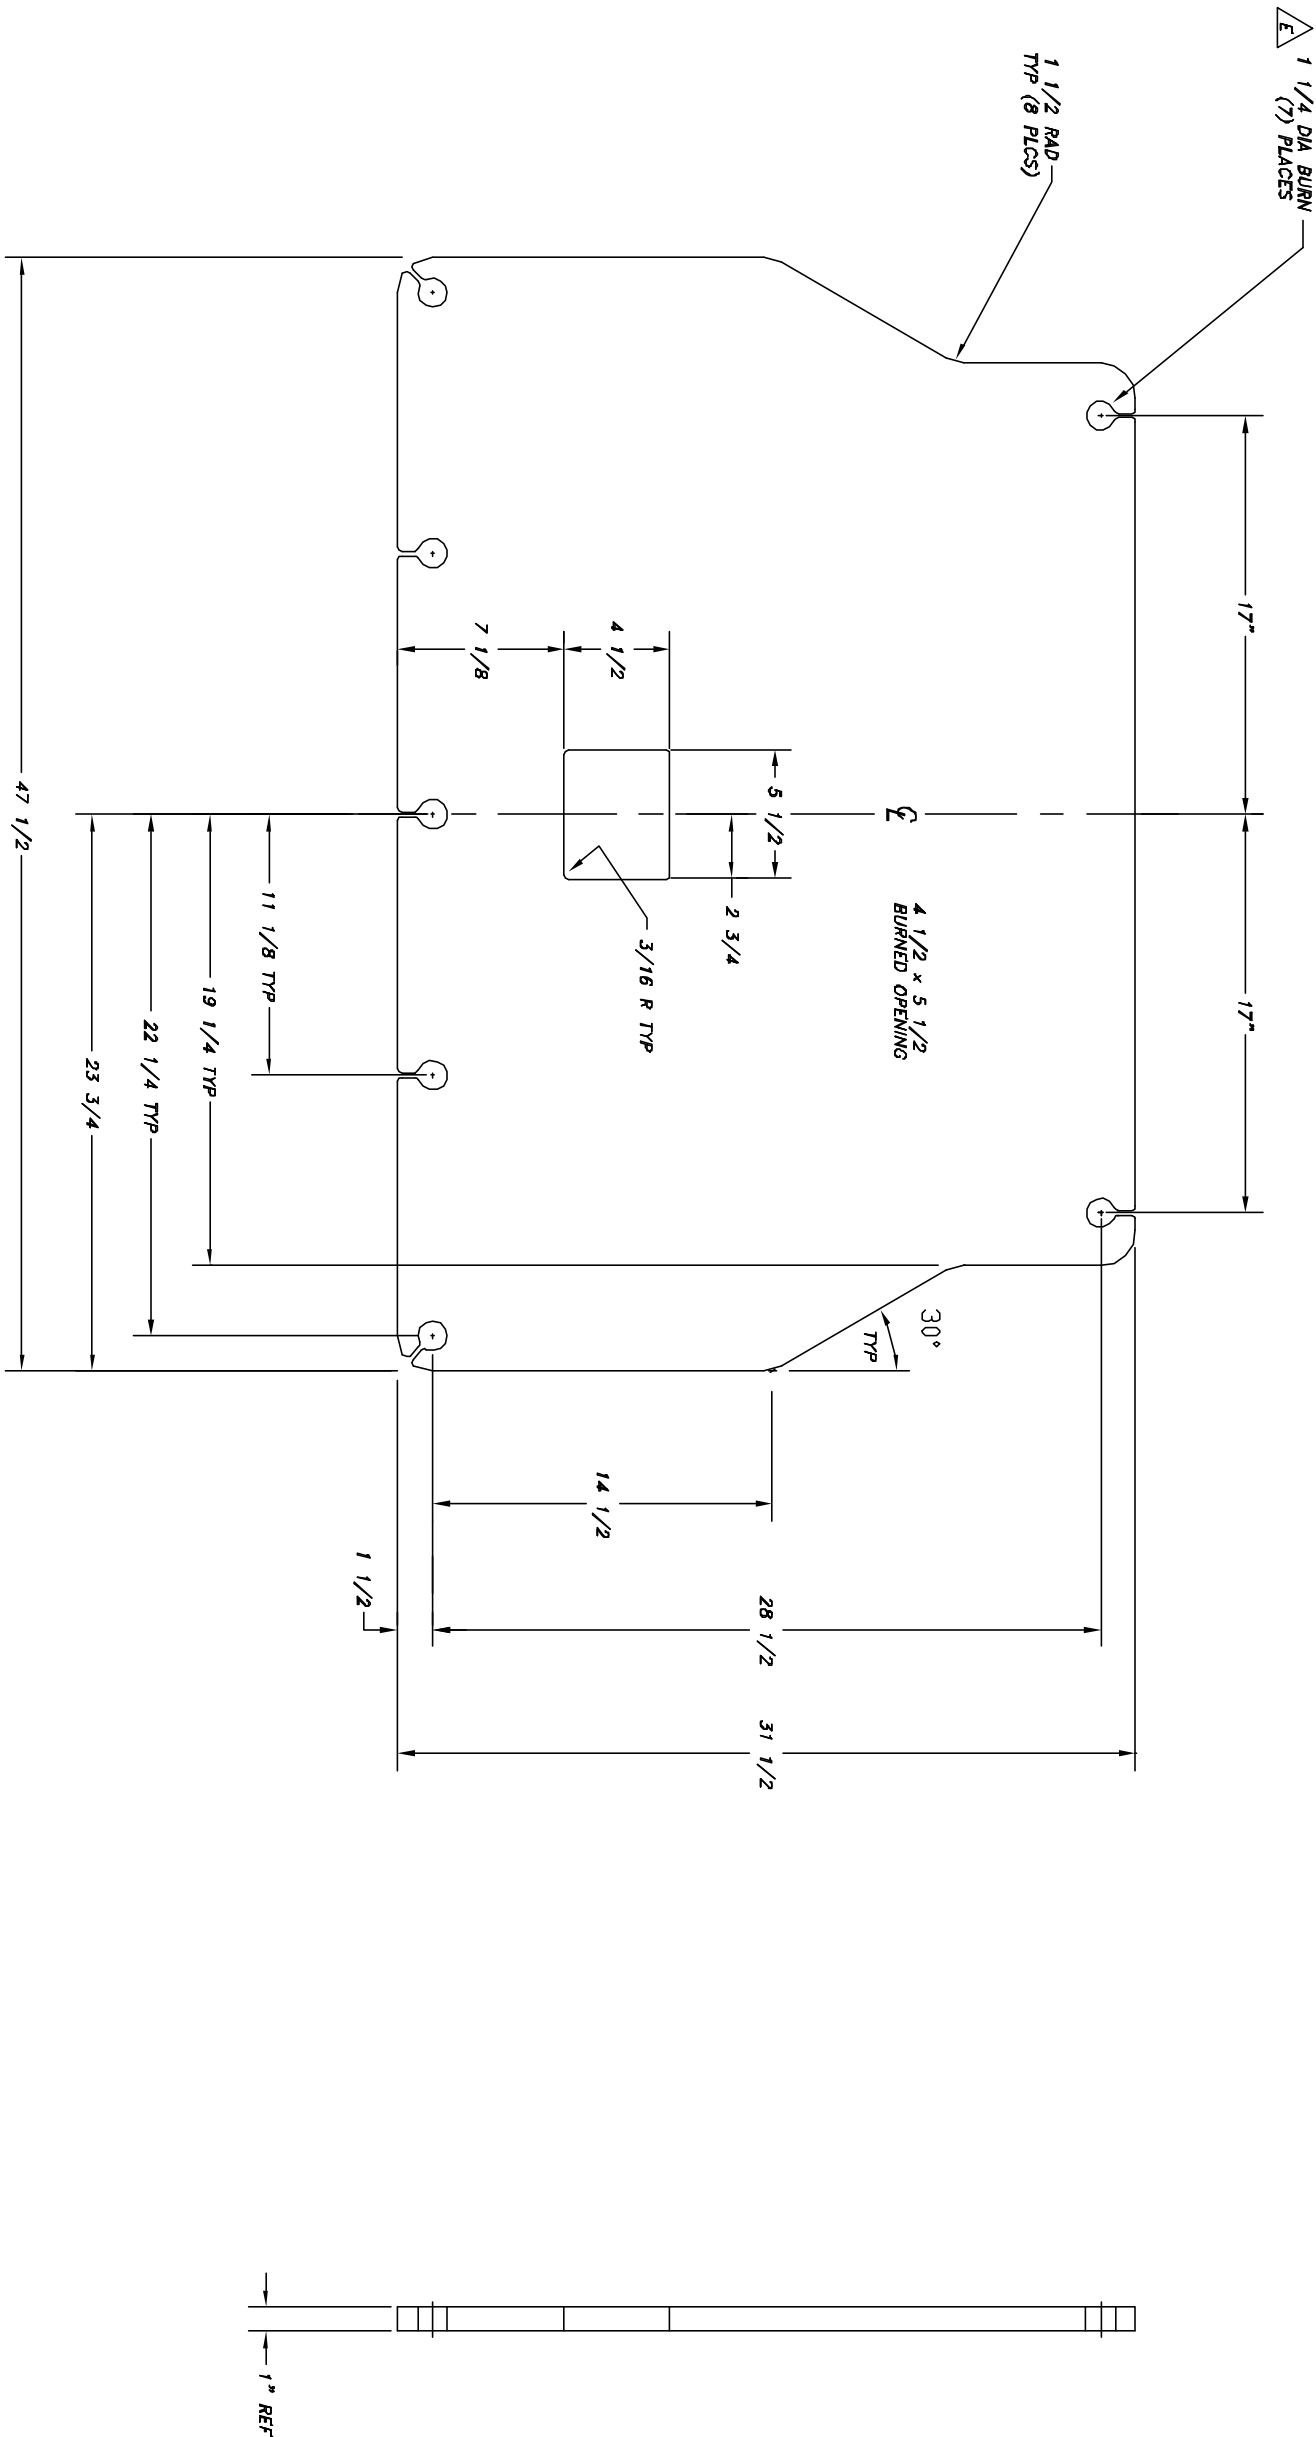

MATERIAL
ASTM A-36 PLATE
1" x 37 1/2 x 47 1/2

USED ON MOHAWK MODEL TP-18A, TP-26A & TP-30A

NOTICE OF CONFIDENTIAL INFORMATION				NOTES:		TOLERANCES:		SCALE	DRAWN	MOHAWK RESOURCES LTD.		
INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPERTY OF MOHAWK RESOURCES LTD. IT SHALL BE USED SOLELY FOR PURPOSES OF INSPECTION, INSTALLATION, OR MAINTENANCE. THE INFORMATION SHALL NOT BE USED OR DISCLOSED BY THE RECIPIENT FOR ANY OTHER PURPOSES WHATSOEVER.				1. REMOVE ALL SHARP CORNERS & EDGES.		ANGULAR		1/4	dck			
				2. UNLESS OTHERWISE SPECIFIED, SURFACE FINISH TO BE 125 RMS.		DECIMAL		± .080	026-000-020			
				3. WELDING METHODS SHALL CONFORM TO AWS SPECIFICATIONS TO E-70XX ELECTRODES OR E-70T1 CODE E.S. PLUS CORE WIRE ONLY.		DXXX		± .008	018-000-001			
				FILE NAME		NEXT ASSEMBLY		DATE	WEIGHT	FROM	DEPARTING NUMBER	
				G00145				3/93	413.27 LB.	600-000-051	026-000-145	

D-SIZE