# MADE IN THE USA

MODELS
TP-26A & TP-26-WB
TP-30A & TP-30-WB

TP-26A – 26,000 LB. CAPACITY 2-POST
TP-26-WB – 26,000 LB. CAPACITY 2-POST (WIDE BASE)
TP-30A - 30,000 LB. CAPACITY 2-POST
TP-30-WB - 30,000 LB. CAPACITY 2-POST (WIDE BASE)
VEHICLE LIFT MANUAL

THANK YOU
FOR SENDING IN YOUR
WARRANTY REGISTRATION
CARD

MOHAWK SERVICE
DEPARTMENT

☑ INSTALLATION

✓ OPERATION

☑ MAINTENANCE

☑ PARTS





Mohawk Standard Models TP-26 & TP-26-WB TP-30 & TP-30-WB

### MOHAWK RESOURCES LTD.

P.O. BOX 110 65 VROOMAN AVENUE AMSTERDAM, NY 12010 **TOLL FREE :** 1-800-833-2006

**LOCAL**: 1-518-842-1431 **FAX**: 1-518-842-1289

INTERNET: WWW.MOHAWKLIFTS.COM

E-MAIL: TECHSUPPORT@MOHAWKLIFTS.COM

READ MANUAL
THOROUGHLY BEFORE
INSTALLING,
OPERATING OR SERVICING
THIS LIFT!!
Deliver these instructions to lift.

Deliver these instructions to lift owner/user/employer along with other instructional materials furnished with this lift.

TP-26A-30A-26WB-30WB 4-1-2012.doc PART # 601-800-368 REV DATE 10/30/2012

#### IMPORTANT SAFETY INSTRUCTIONS

When using your garage equipment, basic safety precautions should always be followed, including the following:

- 1. Read all instructions.
- 2. Care must be taken as burns can occur from touching hot parts.
- 3. Do not operate equipment with a damaged cord or if the equipment has been dropped or damaged until it has been examined by a qualified serviceman.
- 3. Do not let cord or hoses come in contact with hot manifolds or moving fan blades.
- 4. If an extension cord is necessary, a cord with a current rating equal to or more than that of the equipment should be used. Cords rated for less current than the equipment may overheat. Care should be taken to arrange the cord so that it will not be tripped over or pulled.
- 5. Always unplug equipment from electrical outlet when not in use. Never use the cord to pull the plug from the outlet. Grasp plug and pull to disconnect
- 6. To reduce the risk of fire, do not operate equipment in the vicinity of open containers of flammable liquids (gasoline). WARNING: Risk of Explosion: This equipment has internal arcing and sparking parts which should not be exposed to flammable vapors. This equipment is only suitable for installation in a garage having sufficient air circulation to be considered a non-hazardous location.
- 7. Adequate ventilation should be provided when working on operating internal combustion engines.
- 8. Keep hair, loose clothing, fingers, and all parts of body away from moving parts.
- 9. To reduce the risk of electric shock, do not use on wet surfaces or expose to rain.
- 10. Use only as described in this manual. Use only manufacturer's recommended attachments.
- 11. ALWAYS WEAR SAFETY GLASSES. Everyday eyeglasses only have impact resistant lenses, they are NOT safety glasses.

#### SAVE THESE INSTRUCTIONS

Rev (8/3/98)

#### **APPENDAGE:**

#### LIFT ENVIRONMENT:

Mohawk prohibits the outdoor installation of this standard lift, which is APPROVED FOR INDOOR USAGE ONLY, in a normal garage type environment. Any concerns in applications that expose the lift to additional environmental effects, such as paint booths, wash bays, outdoors, high or low temperatures, etc. must be addressed to our engineering department, where provisions could/may be made to the lift to accommodate the area of use. Our engineering department must be made aware in advance of these conditions and any additional code requirements that must be met.

Also, the foundation for which this lift must be installed on must comply to the minimum specifications as set forth in this manual. Any drainage slopes in the bay where the lift is to be installed must be directed away from the posts to prevent water accumulation at the post bases.

Standard foundation flooring and anchorage specifications are contained within this manual. For installation within a seismic area, a qualified person must be consulted to address seismic loads and other local or state requirements.

#### **ACCESSORIES:**

All accessories (i.e. Lifting Pads, Height Adapters, Wheel Adapters, Turf Adapters) supplied with this lift are to be used on this lift only. Accessories from other lifts are not acceptable and could result in injury to the user.

If attachments, accessories or configuration modifying components are used on this lift and, if they are not certified for use on this lift, then the certification of this lift shall become null and void. Contact the participant (Mohawk Resources Ltd.) for information pertaining to certified attachments, accessories or configuration modifying components.

#### LOCKOUT/TAGOUT REQUIREMENTS:

The start switch provided with this unit must not be used as a primary disconnecting means. A separate disconnecting means must be provided in accordance with all applicable codes. It is the responsibility of the owner/user of this unit to provide a proper lockout/tagout device for this unit before or during installation in conformance to ANSI Z244.1 and any local/state/national electrical codes and any OSHA regulations.

#### PROPER SELECTION OF POWER SUPPLY CORD:

Acceptable Cord Types: SO, SEO, STO, SOW, SEOO, SOW-A

Cord Size: 12/4

Cord Ampacity: 20 Amps

Cord Wiring: Green - Ground in Starter Box

Red - L1 on Starter Black - L2 on Starter White - L3 on Starter

Rev (6/19/2012)

# HAVE A QUESTION?

# Call your local Mohawk distributor For parts, service and technical support.

e

Model Number	
Serial Number	

#### **OR CONTACT:**

# MOHAWK RESOURCES LTD.

65 Vrooman Ave.

P.O. Box 110

Amsterdam, NY 12010

Toll Free: 1-800-833-2006

Local: 1-518-842-1431 Fax: 1-518-842-1289

Internet: <a href="www.MOHAWKLIFTS.com">www.MOHAWKLIFTS.com</a>
E-Mail: <a href="mailto:Service@MOHAWKLIFTS.com">Service@MOHAWKLIFTS.com</a>





The Automotive Lift Institute (ALI) is a trade association comprised of US and Canadian manufacturers and certain national distributors of automotive lifts. For almost 50 years, the ALI in cooperation with the American National Standards Institute (ANSI) has continued to sponsor the national standard ANSI/ALI ALCTV:2011 "Safety Requirements for Construction, Testing, and Validation for Automotive Lifts."

The new "ALI/ETL Automotive Lift Certification Program" is based on ALI developed methods and criteria for third party testing of automotive lifts to validate conformance with ANSI/ALI ALCTV:2011.

For automotive lifts to be certified, manufacturers must execute an agreement with the ALI and ETL / Intertek Testing Services and must meet certain requirements:

- Must be structurally tested in accordance with the test requirements as outlined in ANSI/ALI ALCTV:2011.
- ♦ All motor operated units must be listed by a nationally recognized testing laboratory (NRTL) in accordance with ANSI/UL-201.
- ♦ The manufacturer's production facility must meet quality control requirements as set forth in the ANSI Z34.1-1987 and the ALI/ETL Automotive Lift Certification Program Procedural Guide.
- ♦ All manufacturer-provided instructions, manuals, and operator safety documents, must meet the requirements of the ANSI/ALI ALCTV:2011 and ANSI/UL-201.

Lifts meeting these rigid requirements may be listed in the directory of certified lifts and be labeled with the "ALI/ETL certification mark" (Above on right), and, if applicable, the ETL listing mark to ANSI/UL-201.

Mohawk has been a long-standing member of ALI and most of Mohawk's popular models are currently listed and certified. Other Mohawk models are in various stages of testing. To obtain a complete and current certification listing, contact Mohawk Resources Ltd. or visit www.mohawklifts.com\_or www.ali-directory.org To obtain a copy of the current automotive lift standard, contact ALI or ANSI or visit www.autolift.org\_

Some people purchase quality products and others do not. You are assured of quality when you purchase a Mohawk product in compliance with the certification program.

#### MOHAWK WARRANTIES

**EFFECTIVE DATE: 8/1/2012 \*** 

#### **GENERAL WARRANTY INFORMATION:**

MOHAWK'S OBLIGATION UNDER THIS WARRANTY IS LIMITED TO REPAIRING OR REPLACING ANY PART OR PARTS RETURNED TO THIS FACTORY, TRANSPORTATION CHARGES PREPAID, WHICH PROVE UPON INSPECTION TO BE DEFECTIVE AND WHICH HAVE NOT BEEN MISUSED. DAMAGE OR FAILURE TO ANY PART DUE TO FREIGHT DAMAGE OR FAULTY MAINTENANCE IS NOT COVERED UNDER THIS WARRANTY. ALL WARRANTY CLAIMS MUST BE PERFORMED IN ACCORDANCE TO MOHAWK'S WARRANTY PARTS RETURN POLICY (CONTACT MOHAWK'S SERVICE DEPARTMENT FOR MORE INFORMATION). THIS WARRANTY DOES NOT COVER MIS-DIAGNOSING OF UNIT OR PARTS RETURNED THAT ARE NON-DEFECTIVE. THIS WARRANTY DOES NOT COVER ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES INCLUDING, BUT NOT LIMITED TO, LOST REVENUES OR BUSINESS HARM. THIS EQUIPMENT HAS BEEN DESIGNED FOR USE IN NORMAL COMMERCIAL VEHICLE MAINTENANCE APPLICATIONS. A SPECIFIC INDIVIDUAL WARRANTY MUST BE ISSUED FOR UNITS THAT DEVIATE FROM INTENDED USAGE, SUCH AS HIGH CYCLE USAGE IN INDUSTRIAL APPLICATIONS, OR USAGE IN EXTREMELY ABUSIVE ENVIRONMENTS, ETC.. MOHAWK RESERVES THE RIGHT TO DECLINE RESPONSIBILITY WHEN REPAIRS HAVE BEEN MADE OR ATTEMPTED BY OTHERS. THIS WARRANTY DOES NOT COVER LABOR. THIS WARRANTY DOES NOT COVER DOWNTIME EXPENSES INCURRED WHEN UNIT IS IN REPAIR. THE LIFT MUST BE REGISTERED WITHIN 30 DAYS OF INSTALLATION BY MAILING SUPPLIED WARRANTY REGISTRATION CARD TO MOHAWK. THE MODEL NAME AND SERIAL NUMBER OF THE EQUIPMENT MUST BE FURNISHED WITH ALL WARRANTY CLAIMS. THIS WARRANTY STATEMENT CONTAINS THE ENTIRE AGREEMENT BETWEEN MOHAWK RESOURCES LTD. AND THE PURCHASER UNLESS OTHERWISE SPECIFICALLY EXPRESSED IN WRITING. THIS NON-TRANSFERABLE WARRANTY APPLIES TO THE ORIGINAL PURCHASER ONLY. THIS WARRANTY IS APPLICABLE TO UNITS LOCATED ONLY IN THE UNITED STATES OF AMERICA AND CANADA, CONTACT MOHAWK RESOURCES LTD. FOR SPECIFIC WARRANTY PROVISIONS FOR UNITS LOCATED OUTSIDE OF THESE COUNTRIES.

#### STRUCTURAL COMPONENTS (ALL LIFTS):

STRUCTURAL AND MECHANICAL COMPONENTS OF THIS UNIT ARE GUARANTEED FOR THE BELOW STATED TIME FRAME, SPECIFIC TO MODEL LISTED, FROM THE DATE OF SHIPMENT FROM FACTORY, AGAINST DEFECTS IN WORKMANSHIP AND/OR MATERIALS WHEN LIFT IS INSTALLED AND USED ACCORDING TO SPECIFICATIONS.

25-YEARS STRUCTURAL / 10 YEARS MECHANICAL: MODELS A-7, SYSTEM IA-10, LC-12, LC-12-3SA, LMF-12, TP-16, TP-18, TP-20, TP-26, TP-30. STRUCTURAL ITEMS COVERED INCLUDE LEG, CARRIAGE, SWING ARM AND SLIDER WELDMENTS. MECHANICAL ITEMS COVERED INCLUDE ROLLER BEARINGS AND LIFTING CHAIN.

5-YEAR: MODELS TL-7.

3-YEAR: MODELS TR-19, TR-25, FL-25, TR-30, TR-33, TR-35, TR-50, TR-75, TR-110, TR-120, MP-SERIES, RP-SERIES LIFTS.

2-YEAR: MODELS PARALLELOGRAM SERIES LIFTS.

1-YEAR: MODELS TD-1000, TD-2000, CT-1000, USL-6000.

#### **POWER UNIT (ALL LIFTS):**

ALL POWER UNIT COMPONENTS (MOTOR, PUMP AND RESERVOIR) ARE GUARANTEED FOR TWO YEARS FOR PARTS, FROM THE DATE OF SHIPMENT FROM FACTORY, AGAINST DEFECTS IN WORKMANSHIP AND/OR MATERIALS WHEN THE LIFT IS INSTALLED AND USED ACCORDING TO SPECIFICATIONS.

#### **ELECTRICAL COMPONENTS (ALL LIFTS):**

ALL ELECTRICAL COMPONENTS (EXCLUDING MOTOR) ARE GUARANTEED FOR ONE YEAR FOR PARTS, FROM THE DATE OF SHIPMENT FROM FACTORY, AGAINST DEFECTS IN WORKMANSHIP AND/OR MATERIALS WHEN THE LIFT IS INSTALLED AND USED ACCORDING TO SPECIFICATIONS.

#### PNEUMATIC-AIR COMPONENTS (ALL LIFTS):

ALL PNEUMATIC (AIR) COMPONENTS (I.E. AIR CYLINDERS AND POPPET AIR VALVES) ARE GUARANTEED FOR ONE YEAR FOR PARTS, FROM THE DATE OF SHIPMENT FROM FACTORY, AGAINST DEFECTS IN WORKMANSHIP AND/OR MATERIALS WHEN THE LIFT IS INSTALLED AND USED ACCORDING TO SPECIFICATIONS.

#### **HYDRAULIC CYLINDERS (MODEL SPECIFIC LIFTS):**

THE FOLLOWING MODELS ARE GUARANTEED FOR 5 YEARS (PARTS ONLY), FROM DATE OF SHIPMENT FROM FACTORY, FOR HYDRAULIC CYLINDERS, AGAINST DEFECTS IN WORKMANSHIP AND/OR MATERIALS WHEN THE LIFT IS INSTALLED AND USED ACCORDING TO SPECIFICATIONS: A-7, SYSTEM IA-10, LC-12, LC-12-3SA, LMF-12, TP-16, TP-18, TP-20, TP-26, TP-30.

ALL OTHER MODELS ARE GUARANTEED FOR TWO YEARS (PARTS ONLY), FROM THE DATE OF SHIPMENT FROM FACTORY, FOR HYDRAULIC CYLINDERS, AGAINST DEFECTS IN WORKMANSHIP AND/OR MATERIALS WHEN THE LIFT IS INSTALLED AND USED ACCORDING TO SPECIFICATIONS (EXCLUDING USL-6000, WHICH IS ONE YEAR).

AFTER THE FIRST 5 YEARS FROM DATE OF SHIPMENT FROM FACTORY, THE "EXTENDED LIFETIME CYLINDER SEAL WARRANTY" (BELOW) IS APPLICABLE TO THE FOLLOWING MOHAWK LIFTS ONLY: A-7, SYSTEM IA-10, LC-12, LC-12-3SA, LMF-12, TP-16, TP-18, TP-20, TP-26, TP-30. SEE MOHAWK'S "EXTENDED LIFETIME CYLINDER SEAL WARRANTY" FOR SPECIFIC WARRANTY PROVISIONS FOR HYDRAULIC CYLINDERS.

#### THE "EXTENDED LIFETIME CYLINDER SEAL WARRANTY" IS AS FOLLOWS:

AS THE ORIGINAL PURCHASER OF A MOHAWK LIFT MANUFACTURED BY MOHAWK RESOURCES, LTD. YOU ARE ENTITLED TO AN EXTENDED CYLINDER SEAL WARRANTY. TO QUALIFY FOR THIS WARRANTY, THE FOLLOWING CONDITIONS MUST BE MET:

ALL LIFTS MUST BE REGISTERED WITH MOHAWK RESOURCES, LTD., P.O. BOX 110, 65 VROOMAN AVENUE, AMSTERDAM, NY 12010, WITH THE ORIGINAL CUSTOMER NAME, ADDRESS AND PHONE NUMBER, WITHIN 30 DAYS OF INSTALLATION. (USE POSTAGE PAID WARRANTY REGISTRATION CARD ATTACHED TO THE FRONT OF THE MANUAL PROVIDED.)

MOHAWK'S OBLIGATION UNDER THIS WARRANTY IS LIMITED TO SUPPLYING MODEL SPECIFIC CYLINDER SEALS. THE CUSTOMER IS RESPONSIBLE FOR SHIPPING AND HANDLING OF THE SEALS. MOHAWK IS NOT RESPONSIBLE/LIABLE FOR THE REBUILD OF CYLINDERS BY OTHERS. THIS WARRANTY IS NON-TRANSFERABLE AND RUNS TO THE ORIGINAL PURCHASER ONLY.

#### **STANDARD OPTIONS (ALL LIFTS):**

ALL STANDARD OPTIONS OF THIS UNIT ARE GUARANTEED FOR ONE YEAR FOR PARTS, FROM THE DATE OF SHIPMENT FROM FACTORY, AGAINST DEFECTS IN WORKMANSHIP AND/OR MATERIALS WHEN LIFT IS INSTALLED AND USED ACCORDING TO SPECIFICATIONS.

#### **CUSTOM LIFTS AND OPTIONS:**

ALL "CUSTOM" LIFTS AND/OR "CUSTOM" OPTIONS ARE GUARANTEED ON A CASE-BY-CASE BASIS. CONSULT MOHAWK FACTORY FOR DETAILS ON SPECIFIC CUSTOM LIFTS AND/OR OPTIONS.

#### **WARRANTY EXCEPTIONS (ALL LIFTS):**

ADJUSTMENTS: THIS WARRANTY DOES NOT COVER CASUAL AND ROUTINE ADJUSTMENTS SUCH AS, BUT NOT LIMITED TO: FITTINGS, ANCHOR BOLT RE-TIGHTENING, OR ANY SHIMMING OR ADJUSTMENTS REQUIRED DURING A PROPER AND PROFESSIONAL INSTALLATION BY A QUALIFIED INSTALLER.

MAINTENANCE AND INSPECTIONS: IF THIS UNIT IS NOT MAINTAINED AND INSPECTED IN ACCORDANCE TO THE RELEVANT SECTIONS IN THE USERS MANUAL FOR THIS SPECIFIC MODEL, WARRANTY IS VOID. OSHA, ANSI AND MOHAWK REQUIRE THAT RECORDS MUST BE MAINTAINED TO PROVE THAT INSPECTIONS AND MAINTENANCE OF THIS UNIT HAVE BEEN ROUTINELY PERFORMED BY QUALIFIED INDIVIDUALS.

**ABUSE:** IF THIS UNIT IS FOUND TO BE OVERLOADED (PURPOSELY OR UNKNOWINGLY), USED IN A SITUATION BEYOND ITS INTENDED FUNCTION, NOT MAINTAINED OR INSPECTED REGULARLY, OR USED IN AN ABUSIVE ENVIRONMENT OR BEYOND NORMAL SHOP USAGE, ETC., THIS WARRANTY IS VOID IN ITS ENTIRETY.

**NON-EXISTENT PROBLEMS:** FOR SERVICE VISITS, PART REPLACEMENTS, LABOR, ETC. FOR PARTS FOUND TO BE NON-DEFECTIVE, OR FOR A UNIT DIS-FUNCTION THAT DOES NOT EXIST, IT IS THE LIFT OWNER THAT REQUESTED THE SERVICE VISIT WHO BEARS THE RESPONSIBILITY OF ALL RELATED EXPENSES.

**BATTERIES:** ALL BATTERIES CARRY THE BATTERY MANUFACTURER'S WARRANTY. MAINTENANCE REQUIREMENTS AND ABUSE PROVISIONS ARE AS STATED BY THE BATTERY MANUFACTURER. REFER TO BATTERY MANUFACTURER'S WARRANTY.

**SPECIAL/MODIFIED INSTALLATIONS:** THIS WARRANTY DOES NOT COVER "NON-TRADITIONAL" INSTALLATIONS. INSTALLATIONS ARE TO BE DONE ACCORDING TO SPECIFICATIONS, OR THE WARRANTY IS VOID.

**WEARABLE COMPONENTS:** SOME ITEMS ON LIFTS (IE. SLIDE BLOCKS) ARE SUBJECT TO NORMAL "WEAR AND TEAR" AND ARE NOT COVERED UNDER THIS WARRANTY.

\* THIS WARRANTY SUPERSEDES ALL OTHER WARRANTY POLICIES PREVIOUSLY STATED AND IN ALL OTHER MOHAWK PRODUCT SPECIFIC LITERATURE (MANUALS, BROCHURES, ETC.).

# **NOTICE:**

# MODELS TP-26A & TP-30A VS. MODELS TP-26-WB & TP-30-WB

THE TP-26-WB AND TP-30-WB MODELS ARE EQUIVALENT TO THE STANDARD MODELS EXCEPT THEY HAVE A WIDER BASES TO ACCOMMODATE ANCHORAGE TO THINNER FLOORS. FROM A COMPONENT, ELECTRICAL AND HYDRAULIC STANDPOINT, THESE MODELS ARE EQUIVALENT, AND PARTS DRAWINGS REPRESENTED IN THIS MANUAL MAY BE USED INTERCHANGABLY (ANCHORS ARE THE ONLY DIFFERENCE). ALSO NOTE THAT THE SET-UP OF THE WIDER BASE MODELS WILL TAKE UP MORE BAY WIDTH (REFER TO APPROPRIATE BAY LAYOUT AND SPEC DRAWINGS FOR THE APPLICABLE LIFT MODEL).

# **CONTENTS**

	PAGE
APPENDAGES	.1
SPECIFICATIONS	2
PACKING LIST	
RECOMMENDED TOOL LIST_	4
BEFORE INSTALLING A LIFT / WEJ-IT INSTALLATION	.5
INSTALLATION INSTRUCTIONS	6-7
SAFETY TIPS	
FINAL CHECKOUT	
2 POST LIMITATIONS & ADAPTER USAGE	.10
PRE - OPERATION CHECK LIST / LIFTING PROCEDURES	11
MAINTENANCE PROCEDURES	12
TROUBLE SHOOTING	13-14
SERVICE & MAINTENANCE CHART	

#### **FIGURES & DIAGRAMS**

FIGURE	PAGE
TP-26A	17
TP-26-WB	.18
TP-30A	19
TP-30-WB	20
MAN 765	21
MAN 764	22
MAN 065	23
MAN 065A	24
MAN 064	25
MAN 070	26
	TP-26A TP-26-WB TP-30A TP-30-WB MAN 765 MAN 765 MAN 065 MAN 065 MAN 065 MAN 065A MAN 064

#### **PARTS**

	<b>FIGURE</b>	PAGE
TP-26A ISOMETRIC FINAL ASSEMBLY	MAN 750	28
TP-26A MAIN SIDE ASSEMBLY	MAN 750-A	29
TP-26A OFF SIDE ASSEMBLY	MAN 750-B	30
TP-30A ISOMETRIC FINAL ASSEMBLY	MAN 850	31
TP-30A MAIN SIDE ASSEMBLY	MAN 850-A	32
TP-30A OFF SIDE ASSEMBLY	MAN 850-B	33
HYDRAULIC SYSTEM	MAN 768	.34
POWER UNIT ASSEMBLY	MAN 751-A	.35
FILTER-REGULATOR BOX ASSEMBLY	MAN 751-B	36
PNEUMATIC SYSTEM - MAINSIDE	MAN 863	.37
PNEUMATIC SYSTEM - OFFSIDE	MAN 864	38
CARRIAGE SUB-ASSEMBLY	MAN 652	39
CARRIAGE / LIFTING RODS / YOKE	MAN 653	40
CARRIAGE / SWING ARMS / SLIDER / LIFTING PADS	MAN 656	41
MAIN AND OFF SIDE LEG ASSEMBLY	MAN 757	42
MAIN SIDE CYLINDER ASSEMBLY	MAN 659	43
OFF SIDE CYLINDER ASSEMBLY	MAN 660	44
DIVERTER VALVE ASSEMBLY	MAN 766	45
HOSE ASSEMBLY ROUTING	MAN 767	46
SMALL PARTS BAG	MAN 761	47
PARTS BOX	MAN 865	48
FILTER-REGULATOR BAG	MAN 661-B	49
TAG & DECAL LOCATIONS	MAN 858	50

#### **SLAB REQUIREMENTS & NEW SLAB RECOMMENDATIONS**

SLAB REQUIREMENTS & NEW SLAB RECOMMENDATIONS 51-59

ALL INFORMATION, ILLUSTRATIONS, AND SPECIFICATIONS IN THIS MANUAL ARE BASED ON THE LATEST PRODUCT INFORMATION AVAILABLE AT THE TIME OF PRINTING. WE RESERVE THE RIGHT TO MAKE CHANGES AT ANY TIME WITHOUT NOTICE.

#### MOHAWK MODEL TP-26A & TP-30A & TP-26-WB & TP-30-WB

#### **APPENDAGES**

RECOMMENDATIONS BY THE INDIVIDUAL USER OR USING ORGANIZATION FOR IMPROVING THIS PUBLICATION OR ANY ASPECT OF THE PRODUCT ARE ENCOURAGED AND SHOULD BE FORWARDED IN WRITING TO:

MOHAWK RESOURCES LTD. PRODUCT IMPROVEMENTS P.O. BOX 110 AMSTERDAM, NY, 12010

THIS IS NOT A VEHICLE LIFTING PROCEDURE MANUAL AND NO ATTEMPT IS MADE OR IMPLIED HEREIN TO INSTRUCT THE USER IN LIFTING METHODS PARTICULARLY TO THE INDIVIDUAL APPLICATION OF THE EQUIPMENT DESCRIBED IN THIS MANUAL. RATHER, THE CONTENTS OF THIS MANUAL ARE INTENDED AS A BASE LINE FOR OPERATION, MAINTENANCE, TROUBLE SHOOTING, AND PARTS LISTING OF THE UNIT AS IT STANDS ALONE AND AS IT IS INTENDED AND ANTICIPATED TO BE USED IN CONJUNCTION WITH OTHER EQUIPMENT.

PROPER APPLICATION OF THE EQUIPMENT DESCRIBED HEREIN IS LIMITED TO THE PARAMETERS DETAILED IN THE SPECIFICATIONS AND THE USES SET FORTH IN THE DESCRIPTIVE PASSAGES. ANY OTHER PROPOSED APPLICATION OF THIS EQUIPMENT SHOULD BE DOCUMENTED AND SUBMITTED IN WRITING TO MOHAWK RESOURCES LTD. FOR EXAMINATION. THE USER ASSUMES FULL RESPONSIBILITY FOR ANY EQUIPMENT DAMAGE, PERSONAL INJURY, OR ALTERATION OF THE EQUIPMENT DESCRIBED IN THIS MANUAL OR ANY SUBSEQUENT DAMAGES.

DO NOT WELD, APPLY HEAT, OR MODIFY THIS EQUIPMENT IN ANY MANNER WITHOUT WRITTEN AUTHORIZATION FROM MOHAWK RESOURCES LTD. CERTAIN ALLOY OR HEATTREATED COMPONENTS MAY BE DISTORTED OR WEAKENED, RESULTING IN AN UNSAFE CONDITION.

MOHAWK RESOURCES LTD. IS NOT RESPONSIBLE FOR DISTORTIONS WHICH RESULT FROM WELDING ON THIS EQUIPMENT AFTER MANUFACTURING IS COMPLETED. UNAUTHORIZED WELDING, APPLICATION OF HEAT, OR MODIFICATION OF THIS EQUIPMENT VOIDS ANY AND / OR ALL APPLICABLE WARRANTIES COVERING THIS EQUIPMENT. ALL WARRANTIES APPLICABLE TO THIS EQUIPMENT ARE CONTINGENT ON STRICT ADHERENCE TO THE MAINTENANCE SCHEDULES AND PROCEDURES IN THIS MANUAL.

KEEP ALL SHIELDS AND GUARDS IN PLACE. INSURE ALL SAFETY MECHANISMS ARE OPERABLE. KEEP HANDS, FEET, AND CLOTHING AWAY FROM POWER-DRIVEN AND MOVING PARTS.

#### WARNING

 DO NOT INSTALL THIS UNIT IN A PIT OR DEPRESSION DUE TO FIRE OR EXPLOSION RISK

#### **IMPORTANT NOTE**

A LEVEL FLOOR IS SUGGESTED FOR A PROPER INSTALLATION SITE AND WILL ENSURE LEVEL LIFTING. SMALL DIFFERENCES IN FLOOR SLOPES MAY BE COMPENSATED FOR WITH SPECIAL LIFTING PADS. ANY MAJOR SLOPE CHANGES WILL AFFECT THE LOW PROFILE HEIGHT OF THE LIFTING PADS AND / OR THE UNITS LEVEL LIFTING PERFORMANCE. IF A FLOOR IS OF QUESTIONABLE SLOPE, CONSIDER A SURVEY OF THE SIGHT AND / OR THE POSSIBILITY OF POURING A NEW LEVEL CONCRETE SLAB SECTION. SEE FIGURE 1. SIMPLY STATED, FOR OPTIMUM LEVEL LIFTING, THE EQUIPMENT, AT BEST, CAN LIFT ONLY AS LEVEL AS THE FLOOR ON WHICH IT IS LOCATED... AND

SHOULD NOT BE EXPECTED TO COMPENSATE FOR DRASTIC FLOOR SLOPE DIFFERENCES.

THIS EQUIPMENT MUST BE INSTALLED ON A LEVEL CONCRETE FLOOR WITH A MINIMUM THICKNESS OF 12 IN THE CONCRETE MUST BE AGED AT LEAST ( 28 ) TWENTY EIGHT DAYS PRIOR TO INSTALLATION AND HAVE A MINIMUM COMPRESSIVE STRENGTH OF 4000 P.S.I..

DO NOT INSTALL THIS UNIT ON ANY ASPHALT SURFACE.

DO NOT INSTALL THIS UNIT ON ANY SURFACE OTHER THAN CONCRETE CONFORMING TO THE MINIMUM SPECIFICATIONS STATED IN THE **PRE-EXISTING FLOOR REQUIREMENTS SECTION.** 

DO NOT INSTALL THIS UNIT ON EXPANSION SEAMS OR ON CRACKED, DEFECTIVE CONCRETE. CHECK WITH BUILDING ARCHITECT.

DO NOT INSTALL THIS UNIT ON A SECOND FLOOR OR ANY GROUND FLOOR WITH A BASEMENT BENEATH WITHOUT WRITTEN AUTHORIZATION FROM THE BUILDING ARCHITECT.

INSTALL THIS EQUIPMENT ON CONCRETE ONLY IF, FOR ANY REASON, A NEW CONCRETE SLAB SECTION IS REQUIRED, THE MINIMUM THICKNESS, COMPRESSIVE STRENGTH, AND AGING ARE MANDATORY. FOR YOUR PROTECTION, CERTIFIED STRENGTH DOCUMENTATION SHOULD BE OBTAINED FROM THE FIRM WHO SUPPLIES THE CONCRETE MIXTURE AT THE TIME OF THE POUR. SPECIAL CONSIDERATION SHOULD BE MADE TO THE JOINING OF THE EXISTING FLOOR AND THE NEW SECTION BEING ADDED. CHECK WITH BUILDING ARCHITECT. THE SUGGESTED SIZE OF THE NEW CONCRETE SLAB SECTION IS LISTED IN THE, NEW SLAB RECOMMENDATIONS SECTION.

#### **CAUTION**

THE EQUIPMENT DESCRIBED IN THIS MANUAL COULD BE POTENTIALLY DANGEROUS IF IMPROPERLY OR CARELESSLY OPERATED. FOR THE PROTECTION OF ALL PERSONS AND EQUIPMENT, ONLY COMPETENTLY TRAINED OPERATORS WHO ARE CRITICALLY AWARE OF THE PROPER OPERATING PROCEDURES, POTENTIAL DANGERS, AND SPECIFIC APPLICATION OF THIS EQUIPMENT SHOULD BE ALLOWED TO TOUCH THE CONTROLS AT ANY TIME.

SAFE OPERATION OF THIS EQUIPMENT IS DEPENDENT ON USE, IN COMPLIANCE WITH THE OPERATION PROCEDURES OUTLINED IN THIS MANUAL ALONG WITH THE MAINTENANCE AND INSPECTION PROCEDURES WITH CONSIDERATION OF PREVAILING CONDITIONS.

THE EQUIPMENT DESCRIBED IN THIS MANUAL IS NEITHER DESIGNED NOR INTENDED FOR ANY APPLICATION ALONE OR IN CONJUNCTION WITH ANY OTHER EQUIPMENT THAT INVOLVES THE LIFTING OR MOVING OF **PERSONS**.

ALWAYS CONSULT THE VEHICLE LIFTING GUIDE FOR THE PROPER LIFTING POINTS ON ANY VEHICLE. THESE GUIDES ARE AVAILABLE FROM THE VEHICLE MANUFACTURERS. AFTER LIFTING THE VEHICLE TO THE DESIRED HEIGHT, ALWAYS LOWER THE UNIT ONTO THE MECHANICAL SAFETIES. THE FORMING OF GOOD OPERATIONAL WORK HABITS WILL ELIMINATE OVERSIGHTS IN THE USE OF PROVIDED SAFETY

DEVICES.


#### TP-30A SPECIFICATIONS

#### TP-26A & TP-30A SPECIFICATIONS

LIFT TYPE / TWO POST	ELECTRIC / HYDRAULIC
TP-26 LIFTING CAPACITY	26,000 LBS.
TP-30 LIFTING CAPACITY	30,000 LBS.
TP-26 PER ARM CAPACITY	6,500 LBS.
TP-30 PER ARM CAPACITY	7,500 LBS.
LIFTING SPEED APPROX.	130 SECONDS
LIFTING HEIGHT	72 INCHES
OVERALL WIDTH	180 INCHES
WIDTH BETWEEN POST	144 INCHES
WIDTH BETWEEN	122 INCHES
CARRIAGES	
CYLINDER EXTENSION	162-5/8 INCHES
POST HEIGHT	121-1/2 INCHES
OVERHEAD HYDRAULIC	192 INCHES
LINES	
LIFTING PAD HEIGHT ( MIN )	7-1/8 INCHES
LIFTING PAD HEIGHT ( MAX )	79-1/8 INCHES

#### PERFORMANCE TABLE PRESSURE VS. LOAD

TP-26A



#### PRE-EXISTING FLOOR REQUIREMENTS

MINIMUM	MINIMUM COMPRESSIVE	MINIMUM
THICKNESS	STRENGTH	AGING
12 IN *	4000 P.S.I.	28 DAYS

<sup>\* - 8</sup> INCH FOR WIDER BASE MODELS

DO NOT INSTALL ANY MOHAWK LIFT ON ANY SURFACE OTHER THAN CONCRETE CONFORMING TO THE MINIMUM COMPRESSIVE STRENGTH, MINIMUM AGING, AND THE MINIMUM THICKNESS STATED ABOVE.

DO NOT INSTALL ANY MOHAWK LIFT ON EXPANSION SEAMS OR ON CRACKED, OR DEFECTIVE CONCRETE.

DO NOT INSTALL ANY MOHAWK LIFT ON SECONDARY FLOOR LEVELS OR ANY SURFACE WITH A BASEMENT BENEATH WITHOUT WRITTEN AUTHORIZATION FROM THE BUILDING ARCHITECT. NEVER HAND MIX YOUR OWN CONCRETE.

IF FOR ANY REASON A NEW CONCRETE SLAB SECTION IS REQUIRED, FOLLOW THE INSTRUCTIONS FOR THE FLOOR MODIFICATION DATA.

SHIPPING WEIGHT	8,170 LBS.	
POWER UNIT SPECIFICATIONS		

BRAND NAME	MONARCH
MODEL	T-09-08-0-18-02-1-05-07-0-1
POWER UNIT TYPE	VERTICAL
MOTOR VOLTAGE	208 / 230
F.L.A. AT RATED CAPACITY	15.0 / 13.2
MOTOR HORSEPOWER	FIVE
MOTOR PHASE	3
MOTOR CYCLE / HERTZ	60
MOTOR SPEED ( R.P.M. )	1,800
PUMP FLOW ( G.P.M. )	3.3 @ 1,800 R.P.M.
RELIEF VALVE SETTING	2,900 P.S.I.
WORKING PRESSURE	2,700 P.S.I.
RESERVOIR CAPACITY	8 GALLONS
HYDRAULIC FLUID MEDIUM	DEXRON III

#### SUGGESTED SITE SELECTION / BAY SIZE

WIDTH	DEPTH	HEIGHT
* 20 FEET	25 FEET	20 FEET

\* - 22 FEET FOR WIDER BASE MODELS

NOTE

THE PLACEMENT OF THE UNIT IS DETERMINED BY THE TYPE (LENGTH, WIDTH, HEIGHT) OF VEHICLE BEING SERVICED.

#### AIR VALVE TRIO

FILTER / REGULATOR	LUBRICATOR / OIL TYPE
65 PSIG	SAE NO. 10

IT IS NOT RECOMMENDED TO OPERATE THE LIFT UNDER 33 deg. F. DUE TO AIR LINE FREEZING.

#### FLOOR MODIFICATION DATA NEW FLOOR SECTION

THICKNESS	SLAB SIZE	CUBIC
	WIDTH X LENGTH	YARDS
12 INCHES	72 INCHES X 198 INCHES	3.6

IF, FOR ANY REASON, A NEW CONCRETE SLAB SECTION IS REQUIRED, MINIMUM THICKNESS, COMPRESSIVE STRENGTH, AND PROPER AGING IS MANDATORY.

THE NEW SLAB SECTION MUST BE TOTALLY SURROUNDED BY AN EXISTING CONCRETE FLOOR WHICH IS STRUCTURALLY SOUND. CERTIFIED STRENGTH DOCUMENTATION SHOULD BE OBTAINED FROM THE FIRM WHO SUPPLIES THE CONCRETE MIXTURE AT THE TIME OF THE POUR. SEE THE TP-26A FLOOR MODIFICATION DRAWING.

#### **NEVER HAND MIX THE CONCRETE.**

#### TP-26A & TP-30A PACKING LIST

### \*\*\* ALSO SEE DRAWINGS MAN 862 / MAN 761 IN PARTS MANUAL \*\*\*

ORDER NUMBER	PART NUMBER	PART DESCRIPTION	QTY.
NUMBER	NUMBER	DESCRIPTION	
		MAN 862 - PARTS BOX CONTENTS	
040	012-012-047	LIFTING PAD	4
891	601-800-092	MANUAL (ALI / LP-GUIDE)	1
612	601-800-003	MANUAL ( LIFTING IT RIGHT )	1
649	601-800-007	MANUAL ( ALI SAFETY REQUIREMENTS)	1
	601-800-014	MANUAL ( INSTALLATION )	1
613 6	601-800-006	SAFETY TIPS CARD	1
	MAN 761	SMALL PARTS BAG	1
	601-420-084	FITTING ( STRAIGHT, INT PIPE, 1/4 NPT TO # 6 JIC MALE )	2
	020-000-408	AIR HOSE, 1/4 ID X 302 INCH	1
	600-670-006	WEJ-IT, 1" X 10" LG (FOR TP-26A & TP-30A ONLY)	14
	600-670-012	WEJ-IT, 1" X 8" LG (FOR TP-26-WB & TP-30-WB ONLY)	28
	007-007-033	LINE SUPPORT WELDMENT	2
046	018-000-106	HEIGHT ADAPTER 5 INCH	4
057	012-012-151	HEIGHT ADAPTER 7-1/2 INCH	
047 018-000-105		HEIGHT ADAPTER 10 INCH	4
		MAN 761 - SMALL PARTS BAG CONTENTS	
021	601-310-005	BREATHER CAP	1
	601-410-042	VALVE, ( PULL TYPE, DIVERTER VALVE )	1
	600-710-010	WASHER, 1 INCH SAE FLAT	14

### RECOMMENDED TOOL LIST

SIZE / QTY	DESCRIPTION	USED IN	
2 - 1/4 IN	WRENCH & SOCKET	SWING ARM PINS	
1 - 1/2 IN	SOCKET	POST MOUNTING BOLTS	
1 - 1/8 IN	SOCKET	POWER UNIT MOUNTING BRACKET	
1 - 1/6 IN	WRENCH	POWER UNIT MOUNTING BRACKET	
11/16 IN	WRENCH	HYDRAULIC LINES	
5/8 IN	WRENCH	HYDRAULIC LINES	
1/2 IN	WRENCH & SOCKET	ACCESS PLATES	
7/16 IN	WRENCH & SOCKET	STARTER BOX	
1 8 FT. MIN.	CHAIN / NYLON STRAP	ERECTING POST / POWER UNIT	
1	FLAT HEAD SCREW DRIVER	AIR REGULATOR	
1	RATCHET WRENCH	AS NEEDED	
1	VICE GRIPS	AS NEEDED	
1	CRESCENT WRENCH	AS NEEDED	
1	4 FT BUBBLE LEVEL	VERIFY LEVEL ASSEMBLY	
1	PRY BAR	ADJUSTING / MOVING HEAVY ITEMS	
1	TIN SNIPS	PACKAGING BANDING	
1	CHALK LINE	FLOOR LAYOUT	
1	SOAP STONE	FLOOR LAYOUT	
1	25 FT TAPE MEASURE	FLOOR LAYOUT / SQUARING POST	
1 2 TON MIN.	FORK TRUCK OVERHEAD CRANE	LIFTING / ERECTING / MOVING HEAVY ITEMS	
8 FT	STEP LADDER	ASSEMBLE ELEVATED ITEMS	

#### **BEFORE INSTALLING A LIFT**

#### **IMPORTANT**

BEFORE INSTALLING A MOHAWK LIFT THERE ARE A FEW ITEMS THAT MUST BE INSPECTED. EACH REPAIR SHOP BAY IS DIFFERENT. IN AN ATTEMPT TO PREVENT OVERSIGHTS, ALL OF THE FOLLOWING INFORMATION IS TO BE VERIFIED.

#### **OVERHEAD OBSTRUCTIONS**

THE AREA IN WHICH THE LIFT WILL BE LOCATED SHALL BE FREE OF OBSTRUCTIONS. HEATERS, BUILDING SUPPORTS, ELECTRICAL CONDUIT, ETC.

#### DEFECTIVE CONCRETE

VISUALLY INSPECT THE BAY FLOOR AREA. THE UNIT CAN NOT BE INSTALLED ON EXPANSION SEAMS, OR CONCRETE WHICH IS CRACKED. THE UNIT IS ONLY AS STRONG AS THE FLOOR IT IS INSTALLED ON.

#### FLOOR REQUIREMENTS

THIS INFORMATION IS IN THE GENERAL FLOOR REQUIREMENTS. IF THE BAY FLOOR DOES NOT CONFORM TO THESE SPECIFICATIONS, REFER TO THE "NEW SLAB RECOMMENDATIONS" SECTION IN THIS MANUAL.

LOCATE THE MAIN SIDE POST ON THE HIGH SIDE OF THE FLOOR IF A SLOPE IS NOTED.

#### POWER SUPPLY

THE STANDARD POWER UNIT IS 220 VOLT THREE PHASE. REFER TO THE POWER SUPPLY SPECIFICATIONS. REQUIREMENTS MAY VARY ON SPECIAL ORDERS.

THE MAIN SIDE POST WILL REQUIRE THE POWER SUPPLY FOR THE UNIT. NOTE THE LOCATION OF THE POWER SUPPLY.

#### **AIR SUPPLY**

THE MAIN SIDE POST WILL REQUIRE THE AIR SUPPLY FOR THE LINIT

#### **BAY SIZE**

TO OPTIMIZE SHOP SPACE, IT IS ADVISED TO LOCATE A VEHICLE IN THE BAY PRIOR TO LAYOUT. NOTE WALKWAY'S OVERHEAD OBSTRUCTIONS, AND ABILITY TO MOVE EQUIPMENT IN THE BAY AREA. REQUIREMENTS MAY VARY ON SPECIAL ORDERS.

#### **SPECIFICATIONS**

REFERENCE ALL SPECIFICATIONS PRIOR TO INSTALLING A LIFT.

#### **IMPORTANT:**

- ALL INFORMATION, ILLUSTRATIONS, AND SPECIFICATIONS IN THIS MANUAL ARE BASED ON THE LATEST PRODUCT IMFORMATION AVAILABLE AT THE TIME OF PRINTING. WE RESERVE THE RIGHT TO MAKE CHANGES AT ANY TIME WITHOUT NOTICE.
- ON SPECIAL UNIT ORDERS, ALWAYS REFER TO THE LAYOUT DIAGRAMS IN THE FIGURE/DIAGRAM SECTION OF THE MANUAL. SPECIFIC INFORMATION PERTAINING TO THIS LIFT (LENGTH, WIDTH, ETC.) ARE FOUND IN THIS SECTION.

#### WARNING

#### BEFORE DRILLING THE MOUNTING HOLES

- ALL ANCHORS MUST BE A MINIMUM OF 6 INCHES AWAY FROM ANY EXPANSION SEAMS, CONTROL JOINTS, OR OTHER
  INCONSISTENCIES IN THE CONCRETE. REFER TO ANCHOR MANUFACTURER SPECIFICATIONS FOR SPECIFIC INFORMATION
  CONCERNING EDGE DISTANCES AND BOLT TO BOLT DISTANCE REQUIREMENTS.
- REFERENCE ALL FIGURES PERTAINING TO DRILLING, WEJ-IT WARNINGS, AND INSTALLATION INSTRUCTIONS.
- CHECK THE INSIDE DIMENSIONS OF THE POST AT THE BOTTOM FROM THE FACE OF THE MAIN SIDE POST TO THE FACE OF THE OFF SIDE POST. THE INSIDE DIMENSION IS 132 INCHES.
- USE A SHARP DRILL BIT TO PREVENT DRILLING AN UNDERSIZED HOLE. DRILL THE HOLE EQUAL TO THE LENGTH OF THE WEJ-IT ANCHOR. BLOW OUT THE HOLE WITH SHOP AIR, OR VACUUM. INSERT THE WEJ-IT ANCHOR SO THAT THE WASHER RESTS AGAINST THE POST FOOTING.
- NEVER USE AN IMPACT TOOL TO TIGHTEN THE WEJ-IT ANCHORS. USE A TORQUE WRENCH ONLY.
- MAKE SURE THE CONCRETE IS SOLID WHEN DRILLING. CRACKS AND EXPANSION SEAMS REDUCE THE EFFECTIVENESS OF THE WEJ-IT ANCHOR. NEVER INSTALL THE ANCHOR UNDER THESE CONDITIONS.

#### INSTALLATION INSTRUCTIONS

#### **IMPORTANT**

READ THIS MANUAL IN ITS ENTIRETY. BE FAMILIAR WITH PART NAMES AND HAVE A GOOD UNDERSTANDING OF HOW THIS UNIT IS TO BE ASSEMBLED AND OF HOW INDIVIDUAL PARTS OPERATE, BEFORE ASSEMBLING THE UNIT.

REFER TO ANSI/ALI ALIS, SAFETY REQUIREMENTS FOR INSTALLATION AND SERVICE OF AUTOMOTIVE LIFTS.

#### INSTALLING THE LIFT

USE THE PACKING LIST IN THIS MANUAL TO VERIFY ALL SUPPLIED PARTS.

#### WARNING

 EACH POST WEIGHS OVER 4,000 LBS. ERECT THE POSTS WITH CHAINS AND STRAPS ATTACHED TO THE TOP OF THE POST. DO NOT REMOVE THE CHAINS AND STRAPS UNTIL THE POST HAS BEEN SECURED.

ERECT THE MAIN AND OFF SIDE POSTS TO THE UP-RIGHT POSITION. ALIGN TO DIMENSIONS SHOWN IN SPECIFICATION DRAWING. OBSERVE ANCHOR BOLT INSTALLATION INSTRUCTIONS AS SHOWN IN BACK OF MANUAL.

#### SHIMMING THE POST

LEVEL THE POST BY INSERTING THE SUPPLIED SHIMS UNDER THE POST FOOTING AROUND THE WEJ-IT ANCHOR. THE LIFT MUST BE LEVEL BOTH FRONT TO REAR AND SIDE TO SIDE. A LEVELING DEVICE AND A MEASURING TAPE MUST BE USED.

- LEVEL THE MAIN SIDE POST FRONT TO REAR AND SIDE TO SIDE USING A BUBBLE LEVEL.
- LEVEL THE OFF SIDE POST FRONT TO REAR USING A
  BUBBLE LEVEL. SET THE POST PARALLEL TO THE MAIN
  SIDE POST USING A MEASURING TAPE, MEASURING FROM
  THE EDGE OF THE MAIN SIDE CHANNEL TO THE EDGE OF
  THE OFF SIDE CHANNEL AT THE BASE AND AT THE TOP OF
  THE POST.
- THE MEASUREMENT AT THE TOP OF THE POST MUST BE THE SAME AS THE MEASUREMENT AT THE BASE OF THE POST

SECURE THE MAIN AND OFF SIDE POSTS TO THE BAY FLOOR USING THE (14) 1" DIA X 10" LG ANCHOR BOLTS. USE (28) 1" DIA X 8" LG ANCHORS FOR WIDER BASE MODELS. POSITION THE POWER UNIT MOUNTING BRACKET TO THE TOP SIDE OF THE POST. SECURE THE POWER UNIT TO THE MAIN SIDE POST.

REMOVE THE STARTER BOX COVER. USING THE THREE  $1/4 \times 1$  INCH BOLTS, WASHERS & NYLON LOCK NUTS, SECURE THE STARTER BOX WITH AIR LINE TRIO TO THE MAIN SIDE POST. REPLACE STARTER BOX COVER.

REMOVE THE BREATHER PORT PLUG ON THE POWER UNITS RESERVOIR AND DISCARD. VERIFY FLUID LEVEL. (1/2 IN. BELOW BREATHER PORT WHEN BOTH CYLINDERS ARE FULLY RETRACTED) ADD DEXRON III AS NEEDED TO FILL. ALWAYS USE A CLEAN FUNNEL AND FILTER. INSTALL THE BREATHER CAP.

REMOVE THE PULL VALVE PORT PLUG ON THE DIVERTER VALVE. INSERT AND TIGHTEN THE PULL VALVE. TIGHTEN TO 10 FOOT POUNDS. REFER TO DIVERTER VALVE ASSEMBLY

REMOVE THE MAIN AND OFF SIDE ACCESS PANELS AT THE BASE OF THE POSTS. ROUTE THE THREE 14 FT 6 IN HYDRAULIC / AIR HOSES THROUGH THE SUB-FRAME. ROUTE THE 90 deg. END OF THE 3/8 IN HYDRAULIC HOSE TO THE OFF SIDE.

CONNECT / SECURE THE TWO HYDRAULIC HOSES ( ONE 3/8 IN HOSE & ONE 1/4 IN HOSE ) TO THE HYDRAULIC SYSTEM. REFER TO THE TP-26A HYDRAULIC SYSTEM. USING THE STRAIGHT 1/4 NPT FEMALE TO # 6 JIC MALE FITTING, CONNECT / SECURE THE 1/4 IN AIR HOSE. REFER TO THE PNEUMATIC SYSTEM DRAWING.

USING THE 1/4 INCH AIR TUBING INSERT ONE END TO THE AIR LINE TRIO. ROUTE THE OPPOSITE END OVER AND THROUGH THE TOP OF THE MAIN SIDE POST. CONNECT THE AIR HOSE TO THE 1/4 INCH UNION TEE FITTING.

#### AIR LINE HOOKUP

REGULATOR: BEFORE TURNING ON AIR SUPPLY, DISENGAGE THE ADJUSTING KNOB ON THE REGULATOR BY PULLING UPWARD. TURN ADJUSTING KNOB COUNTERCLOCKWISE UNTIL COMPRESSION IS RELEASED FROM PRESSURE CONTROL SPRING. CONNECT SHOP AIR TO THE AIR LINE QUICK COUPLER PLUG. PROCEED TO ADJUST THE DOWNSTREAM PRESSURE BY TURNING ADJUSTING KNOB CLOCKWISE. ADJUST THE PRESSURE TO 65 PSIG.

TO DECREASE REGULATED PRESSURE SETTINGS, ALWAYS RESET FROM A PRESSURE LOWER THAN FINAL SETTING REQUIRED. WHEN DESIRED SECONDARY PRESSURE SETTINGS HAVE BEEN REACHED, PUSH THE ADJUSTING KNOB DOWN TO LOCK.

<u>LUBRICATOR:</u> INLET PRESSURE MUST BE ELIMINATED BEFORE FILL PLUG OR BOWL IS REMOVED. FILL TO FILL LINE ON THE BOWL. USE SAE NO. 10 PETROLEUM BASE HYDRAULIC OIL. REPLACE THE FILL PLUG AND/OR BOWL ASSEMBLY FIRMLY - EXCESSIVE TORQUE IS NOT NECESSARY.

DO NOT USE OILS WITH ADHESIVES OR TACKY ADDITIVES. COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, SOAPS OR DETERGENTS ARE NOT RECOMMENDED. ( AUTOMOTIVE OILS GENERALLY CONTAIN DETERGENT )

#### INSTALLATION INSTRUCTIONS CONTINUED

# AT THIS TIME HAVE A QUALIFIED ELECTRICIAN CONNECT THE POWER SUPPLY TO THE UNIT

REMOVE THE PACKING BRACKETS FROM THE MAIN AND OFF SIDE CARRIAGE.

ENGAGE THE UP BUTTON AND RAISE THE CARRIAGES APPROX. 3 FEET, OR TO A SUITABLE HEIGHT FOR INSTALLING THE SWING ARMS

LIFTING UP ON THE SWING ARM RESTRAINT. INSERT THE FOUR SWING ARMS INTO THE CARRIAGES. ALIGN THE THROUGH HOLES IN THE CARRIAGES WITH THE THROUGH HOLES IN THE SWING ARMS. SECURE THE SWING ARMS TO THE CARRIAGES USING THE FOUR SWING ARM PINS AND EIGHT NYLON LOCK NUTS.

PLACE THE FOUR LIFTING PADS INTO PLACE AT THE END OF EACH SLIDER.

PLACE THE 12 HEIGHT ADAPTERS INTO PLACE ON THE SIDE OF THE MAIN  $\,$  AND OFF SIDE POST.

#### **BLEEDING PROCEDURE**

ENGAGE THE UP BUTTON ON THE POWER UNIT. OBSERVE THE CARRIAGE. WHEN THE MAIN AND OFF SIDE CARRIAGES HAVE REACHED FULL HEIGHT CONTINUE TO RUN THE UNIT FOR TWO MINUTES. ( THIS WILL PURGE THE AIR FROM THE HYDRAULIC SYSTEM )

#### NOTE

LISTEN FOR THE PRESSURE RELIEF VALVE.. A NOTICEABLE
 INCREASE IN POWER UNIT VOLUME THIS WILL INDICATE
 AN EXCESS OF SHIMS BENEATH THE YOKE ASSEMBLIES
 RESTRICTING THE MAIN OR OFF SIDE CYLINDERS FROM
 REACHING FULL STROKE. IF THIS OCCURS, REMOVE ONE
 SHIM FROM BENEATH THE YOKE.

AT THIS TIME PERFORM THE PRE-OPERATION CHECK LIST AND MAINTENANCE PROCEDURES ( DAILY - WEEKLY - MONTHLY ) MAKE ALL ADJUSTMENTS PERTAINING TO THESE PROCEDURES.

#### **DIVERTER VALVE OPERATION**

#### WARNING

AS WITH ALL FUNCTIONS OF THE LIFT UNIT, NEVER OPERATE THE DIVERTER VALVE UNLESS YOU HAVE FIRST PERFORMED THIS OPERATION WITH NO VEHICLE, AND FULLY UNDERSTAND ITS FUNCTIONS.

BOTH MECHANICAL SAFETIES MUST BE ENGAGED BEFORE OPERATING THE DIVERTER VALVE.

#### **PURPOSE**

 THE PURPOSE OF THE DIVERTER VALVE IS TO ENABLE THE OPERATOR TO RAISE OR LOWER THE OFF SIDE CARRIAGE INDEPENDENTLY OF THE MAIN SIDE CARRIAGE.

#### TO OPERATE THE DIVERTER VALVE

ENGAGE THE DIVERTER VALVE BY PULLING THE DIVERTER VALVE PULL KNOB.

 THIS WILL DIVERT ALL FUNCTIONS OF THE POWER UNIT TO THE OFF SIDE CYLINDER.

WITH THE VALVE ENGAGED, ENERGIZE THE POWER UNIT BY PUSHING THE UP BUTTON.

WHEN THE DESIRED HEIGHT HAS BEEN ACHIEVED, RELEASE THE DIVERTER VALVE PULL KNOB AND THE UP BUTTON.

ENGAGE THE DOWN BUTTON, LOWER THE UNIT ONTO BOTH MECHANICAL SAFETIES ENDING THIS PROCEDURE.

#### **SAFETY TIPS**

PLEASE POST THE **AUTOMOTIVE LIFT SAFETY TIPS CARD,** ( **A COPY IS INCLUDED IN THE PARTS BOX** ) WHERE THEY WILL BE CONSTANTLY REMINDED TO YOUR LIFT OPERATOR. FOR INFORMATION SPECIFIC TO THE LIFT, ALWAYS REFER TO THE MOHAWK MANUAL.

- INSPECT YOUR LIFT DAILY. NEVER OPERATE
  IT IF IT MALFUNCTIONS OR IF IT HAS BROKEN
  OR DAMAGED PARTS. REPAIRS SHOULD BE
  MADE WITH ORIGINAL MOHAWK PARTS.
- OPERATING CONTROLS ARE DESIGNED TO CLOSE WHEN RELEASED. DO NOT BLOCK OPEN OR OVERRIDE THEM.
- NEVER OVERLOAD YOUR LIFT BEYOND STATED LIFTING CAPACITY. RATED CAPACITY IS SHOWN ON NAMEPLATE AFFIXED TO THE LIFT.
- POSITIONING OF VEHICLE AND OPERATION OF THE LIFT SHOULD BE DONE ONLY BY TRAINED AND AUTHORIZED PERSONNEL.
- DO NOT ALLOW CUSTOMERS OR BY-STANDERS TO OPERATE THE LIFT OR TO BE IN A LIFTING AREA DURING ITS OPERATION. ONLY PROPERLY TRAINED PERSONNEL SHOULD BE ALLOWED TO OPERATE LIFT.
- NEVER RAISE A VEHICLE WITH PERSONS INSIDE.
- ALWAYS KEEP LIFT AREA FREE OF OBSTRUCTIONS, DEBRIS, GREASE, OIL.
- PERFORM THE PRE-OPERATION CHECK LIST, PER INSTRUCTIONS, BEFORE RAISING VEHICLE TO DESIRED HEIGHT.
- BEFORE DRIVING VEHICLE INTO THE BAY, POSITION ARMS AND SUPPORTS TO PROVIDE

- UNOBSTRUCTED CLEARANCE. DO NOT HIT OR RUN OVER LIFT ARMS, ADAPTERS, OR AXLE SUPPORTS. THIS COULD DAMAGE LIFT OR VEHICLE.
- LOAD VEHICLE ON LIFT CAREFULLY. POSITION LIFT SUPPORTS TO CONTACT AT THE VEHICLE MANUFACTURER'S RECOMMENDED LIFTING POINTS. RAISE LIFT UNTIL SUPPORTS CONTACT VEHICLE. CHECK SUPPORTS FOR SECURE CONTACT WITH VEHICLE. RAISE LIFT TO DESIRED WORKING HEIGHT. CAUTION: IF YOU ARE WORKING UNDER VEHICLE, LIFT SHOULD BE RAISED HIGH ENOUGH FOR LOCKING DEVICE TO BE ENGAGED.
- NOTE THAT WITH SOME VEHICLES, THE REMOVAL OR INSTALLATION OF COMPONENTS MAY CAUSE A CRITICAL SHIFT IN THE CENTER OF GRAVITY, AND RESULT IN RAISED VEHICLE INSTABILITY. REFER TO THE VEHICLE MANUFACTURER'S SERVICE MANUAL FOR RECOMMENDED PROCEDURES WHEN VEHICLE COMPONENTS ARE REMOVED.
- BEFORE LOWERING LIFT, BE SURE TOOL TRAY'S, STANDS, ETC. ARE REMOVED FROM UNDER VEHICLE. RELEASE LOCKING DEVICES BEFORE ATTEMPTING TO LOWER LIFT.
- BEFORE REMOVING VEHICLE FROM THE LIFT AREA, POSITION LIFT ARMS AND SUPPORTS TO PROVIDE AN UNOBSTRUCTED EXIT.

#### LIFT FINAL CHECKOUT (AFTER INSTALLATION):

REV (6/28/2012)

THIS PROCEDURE OUTLINES THE FINAL CHECKS TO MAKE AFTER INITIAL INSTALLATION OF THE LIFT UNIT. REPEAT THIS PROCEDURE IF THE LIFT IS RELOCATED.

#### AFTER THE LIFT IS FULLY ASSEMBLED, RAISE THE LIFT EMPTY A FEW TIMES TO VERIFY:

- PROPER SYNCHRONIZATION OF LIFT ARMS
- UNIT IS RAISING SMOOTHLY (AIR IS BLEED FROM HYDRAULIC SYSTEM SEE BLEEDING PROCEDURE FOR MORE DETAILS)
- NO LEAKS PRESENT AT ANY FITTING JUNCTIONS
- LOCKS ARE ENGAGING ON BOTH POSTS AS LIFT IS RAISING
- LOCKS ARE DIS-ENGAGING ON BOTH POSTS WHEN RELEASE CABLE PULLED (SEE J-BAR ADJUSTMENT PROCEDURE)
- LOCKS ARE RE-ENGAGING AFTER DIS-ENGAGED WHEN LIFT IS RAISED
- LIFT IS NOT DRIFTING DOWN WHEN RAISED (RAISE LIFT, THEN STOP, AND VERIFY DRIFT DOWN OF CYLINDERS)
- NO VIBRATIONS FROM LOOSE CLAMPING, ETC.
- SWING ARMS ROTATE SMOOTHLY WHEN LIFT FULLY LOWERED AND LOCK IN PLACE WHEN LIFT RAISED

ONCE THIS IS COMPLETE, LOCATE A REPRESENTATIVE VEHICLE INTO THE LIFTING AREA. USE A VEHICLE THAT WEIGHS AT LEAST 75 PERCENT OF THE CAPACITY OF THE LIFT.

OBSERVING LIFTING PROCEDURES CONTAINED IN THIS MANUAL TO LOCATE VEHICLE IN LIFTING AREA, AND TO LOCATE LIFTING PADS AT LIFTING POINTS FOR VEHICLE, AND WHILE RAISING AND LOWERING.

#### RAISE LIFT APPROXIMATELY 1 FOOT. VERIFTY THE FOLLOWING:

- PROPER SYNCHRONIZATION OF LIFT ARMS
- NO LOOSENING OF REAR ANCHOR BOLTS IN BASE PLATES AT FLOOR (LOOK FOR GAP BETWEEN FLOOR AND BASES)
- UNIT IS RAISING SMOOTHLY (AIR IS BLEED FROM HYDRAULIC SYSTEM SEE BLEEDING PROCEDURE FOR MORE DETAILS)
- NO LEAKS PRESENT AT ANY FITTING JUNCTIONS
- LOCKS ARE ENGAGING ON BOTH POSTS AS LIFT IS RAISING
- LIFT IS NOT DRIFTING DOWN WHEN RAISED (RAISE LIFT, THEN STOP, AND VERIFY DRIFT DOWN OF CYLINDERS)
- NO VIBRATIONS FROM LOOSE CLAMPING, ETC.

#### RELEASE LOCKS AND LOWER UNIT. VERIFY THE FOLLOWING:

- PROPER SYNCHRONIZATION OF LIFT ARMS
- UNIT IS LOWERING SMOOTHLY (AIR IS BLEED FROM HYDRAULIC SYSTEM SEE BLEEDING PROCEDURE FOR MORE DETAILS)
- NO LEAKS PRESENT AT ANY FITTING JUNCTIONS
- NO VIBRATIONS FROM LOOSE CLAMPING, ETC.
- LOCKS ARE NOT RE-ENGAGING WHILE LOWERING

#### RAISE LIFT TO FULL STROKE. VERIFY THE FOLLOWING:

- PROPER SYNCHRONIZATION OF LIFT ARMS
- NO EXCESSIVE DEFLECTION OF POSTS OR ARMS
- NO LOOSENING OF REAR ANCHOR BOLTS IN BASE PLATES AT FLOOR (LOOK FOR GAP BETWEEN FLOOR AND BASES)
- UNIT IS RAISING SMOOTHLY (AIR IS BLEED FROM HYDRAULIC SYSTEM SEE BLEEDING PROCEDURE FOR MORE DETAILS)
- NO LEAKS PRESENT AT ANY FITTING JUNCTIONS
- LOCKS ARE ENGAGING ON BOTH POSTS AS LIFT IS RAISING
- LIFT IS NOT DRIFTING DOWN WHEN RAISED (RAISE LIFT, THEN STOP, AND VERIFY DRIFT DOWN OF CYLINDERS)
- NO VIBRATIONS FROM LOOSE CLAMPING, ETC.

#### LOWER LIFT ONTO LOCKS. VERIFY THE FOLLOWING:

- LOCK IS ENGAGING UPON DESCENT
- PROPER SYNCHRONIZATION OF LIFT ARMS

#### RAISE, THEN RELEASE LOCKS, THEN LOWER VEHICLE TO FLOOR, VERIFY THE FOLLOWING:

- PROPER SYNCHRONIZATION OF LIFT ARMS
- UNIT IS RAISING & LOWERING SMOOTHLY (AIR IS BLEED FROM HYDRAULIC SYSTEM SEE BLEEDING PROCEDURE FOR MORE DETAILS)
- NO LEAKS PRESENT AT ANY FITTING JUNCTIONS
- NO VIBRATIONS FROM LOOSE CLAMPING, ETC.
- LOCKS ARE NOT RE-ENGAGING WHILE LOWERING
- NO LOOSENING OF REAR ANCHOR BOLTS IN BASE PLATES AT FLOOR (LOOK FOR GAP BETWEEN FLOOR AND BASES)

ENSURE THAT ALL MANUALS AND OTHER INSTRUCTIONAL MATERIALS ARE DELIVERED TO OWNER/USER/EMPLOYER. ENSURE THAT USERS ARE INSTRUCTED IN THE SAFE AND PROPER USER OF THE LIFT.

FINAL CHECKOUT OF LIFT IS COMPLETE.

#### 2-POST LIMITATIONS AND ADAPTER USAGE:

REV (2/9/2006)

#### 2-POST LIMITATIONS:

ALL MOHAWK 2-POST LIFTS ARE FOR INDOOR USE UNLESS SPECIFICALLY QUALIFIED AND MODIFIED FOR A CUSTOM ENVIRONMENT.

ALL MOHAWK 2-POST LIFTS MUST ACCOMPLISH THREE MAIN CRITERIA IN ORDER TO LIFT A VEHICLE SAFELY:

- 1. **PROPER FRAME ENGAGEMENT WITH PADS.** ALL 2-POST FRAME ENGAGING LIFTS ARE DESIGNED TO LIFT STANDARD VEHICLES WITHIN THEIR RATED CAPACITY BY THE VEHICLE FRAME. IF SUITABLE FRAME CONTACT LIFT POINTS CAN NOT BE REACHED OR ACCOMMODATED BY THE LIFTING PADS, THE VEHICLE MUST NOT BE RAISED WITH THE LIFT. REFER TO VEHICLE MANUFACTURER LIFTING POINT SPECIFICATIONS (AND VEHICLE LIFT POINT LABEL PER SAE J2184, VEHICLE LIFT POINTS FOR SERVICE GARAGE LIFTING).
- 2. **PROPER CENTER OF GRAVITY PLACEMENT OF VEHICLE ON LIFT** ENSURE THAT THE CENTER OF GRAVITY OF THE VEHICLE LIES CENTERED BETWEEN THE LIFTING ARMS. THIS SHOULD PLACE THE CENTER OF GRAVITY OF THE VEHICLE IN LINE WITH THE CENTER OF THE POSTS AS WELL.
- 3. **PROPER LOADING OF ARMS.** INDIVIDUAL ARM CAPACITIES ARE ¼ OF THE RATED LIFT CAPACITY, AND MUST NOT BE EXCEEDED. FOR INSTANCE, A 10,000 LB RATED 2-POST LIFT HAS ARMS THAT ARE RATED FOR 2,500 LBS EACH. IT IS POSSIBLE THAT A 10,000 LB VEHICLE CAN OVERLOAD THE ARMS ON A 10,000 LB LIFT IF THE FRONT AND REAR LOADING ARE NOT EQUAL.

WITH RESPECT TO HEAVY ENDED VEHICLES SUCH AS FORK TRUCKS, DELIVERY VANS, PICKUP TRUCKS, ETC, ATTENTION MUST BE MADE TO ENSURE THAT THE PER ARM CAPACITY OF THE LIFTING ARMS IS NOT EXCEEDED AND THAT THE CENTER OF GRAVITY OF THE VEHICLE LIES CENTERED BETWEEN THE LIFTING ARMS.

SPECIAL SAFETY PRECAUTIONS MUST BE OBSERVED IN APPLICATIONS INVOLVING VERY LONG AND VERY SHORT WHEELBASE VEHICLES. 2-POST LIFTS ARE NOT DESIGNED TO RAISE STRETCHED LIMOS AND OTHER TYPES OF LONG WHEEL BASE VEHICLES. AS A RULE OF THUMB, THE VEHICLE LENGTH ON A 2-POST MUST BE LIMITED TO 4 TIMES THE LENGTH OF THE ARM SPREAD TO RAISE IT. THE CENTER OF GRAVITY ON THIS VEHICLE MUST LIE BETWEEN THE LIFTING PADS TO ACCOMPLISH THIS. NOTE THAT SOME VEHICLES, PER VEHICLE MANUFACTURER GUIDELINES, ARE NOT TO BE RAISED BY THE FRAME. REFER TO VEHICLE MANUFACTURER GUIDELINES FOR PROPER LIFTING TECHNIQUES.

THIS LIFT IS NOT INTENDED. NOR DESIGNED, TO LIFT VEHICLE FRONT OR BACK ENDS USING ONLY TWO ARMS.

CARE MUST BE OBSERVED WHEN REMOVING ANY HEAVY COMPONENTS FROM A VEHICLE AND THEREBY DRASTICALLY SHIFTING THE VEHICLE CENTER OF GRAVITY (I.E. ENGINE REMOVAL, TRANSMISSION REMOVAL, ETC.). THE USE OF JACK STANDS AT THE FRONT AND REAR ENDS OF THE VEHICLE IS HIGHLY RECOMMENDED WHEN PERFORMING THIS TYPE OF WORK.

#### ADAPTER USAGE AND LIMITATIONS:

THE USE OF HEIGHT ADAPTERS IS COMMON FOR MOST LIFTING SITUATIONS TO ACCOMMODATE HIGH FRAMES AND LOW OVERHANGING BODIES OF VEHICLES.

FOR A-7, A-7A, SYSTEM IA, SYSTEM IA-10, TOMAHAWK-9000:

THESE LIFTS COME STANDARD WITH (4) 3" AND (4) 6" HEIGHT ADAPTERS.

THESE LIFTS ARE ONLY ALLOWED TO USE 2 ADAPTERS WHEN STACKED: ONE (1) 6" AND ONE (1) 3" ADAPTER, RESULTING IN 9" MAXIMUM STACKING HEIGHT. LONGER CUSTOM SINGLE PIECE ADAPTERS ARE AVAILABLE UPON REQUEST.

FOR LMF-12, TP-15, TP-16, TP-18, TP-20, TP-26, TP-30:

THESE LIFTS COME STANDARD WITH (4) 5", (4) 7 1/2", AND (4) 10" HEIGHT ADAPTERS.

THESE LIFTS ARE ONLY ALLOWED TO USE 2 ADAPTERS WHEN STACKED: ONE (1) 10" AND ONE (1) 7½" ADAPTER, RESULTING IN 17 1/2" MAXIMUM STACKING HEIGHT. LONGER CUSTOM SINGLE PIECE ADAPTERS ARE AVAILABLE UPON REQUEST.

THE USER SHOULD BE WARNED THAT ANY SITUATION PRODUCING AN OFF-VERTICAL SLANTING OF THE HEIGHT ADAPTERS, SUCH AS DEFLECTION OF THE ARM DUE TO HEAVY LOAD, DEFLECTION OF THE ARM DUE TO SLOP, ECCENTRIC CORNER LOADING OF THE LIFT PAD, ETC. MUST BE AVOIDED. CUPPED OR YOKE STYLE LIFTING PADS (WHICH DO NOT RELY ON FRICTION) ARE ALSO AVAILABLE FOR SITUATIONS INVOLVING LIFTING NON-FLAT SURFACES. CONSULT MOHAWK SERVICE DEPARTMENT FOR CUSTOM PAD REQUESTS FOR YOU APPLICATION.

#### PRE - OPERATION CHECK LIST

#### TRAINED OPERATOR

 THE OPERATOR MUST BE FULLY TRAINED AND QUALIFIED TO SAFELY AND EFFECTIVELY OPERATE THIS EQUIPMENT OF THIS SPECIFIC MAKE AND MODEL.

#### ABSENCE OF OBSTRUCTIONS

 THE TOTAL WORK AREA MUST BE FREE OF ANY AND ALL OBSTRUCTIONS AND BE GENERALLY CLEAN. (FREE OF OIL AND DEBRIS)

#### VISUAL INSPECTION

 THOROUGHLY INSPECT THE UNIT WITH A TRAINED EYE, NOTING ANY PROBLEM AREAS. INSPECT THE FLOOR AND THE ANCHORING FASTENERS AS WELL. REPORT ANY OUESTIONABLE ITEMS.

#### AIR PRESSURE TO LIFT

• INSURE SUFFICIENT AIR IS AVAILABLE TO THE LIFT TO OPERATE THE PNEUMATIC LOCK SYSTEM.

#### NO LOAD PERFORMANCE CHECK

- ALL MECHANICAL SAFETIES OPERATE PROPERLY AND CONSISTENTLY.
- NO EXTERNAL FLUID LEAKS.
- NO BLEED DOWN.
- EFFORTLESS AND SIMULTANEOUS MOVEMENT.
- LEVEL LIFTING.
- CONTROLS FUNCTION PROPERLY.
- ALL SAFETY MECHANISMS FULLY FUNCTIONAL.

#### PREVIOUS DAY'S OPERATION REPORT

• VERIFY WITH SUPERVISOR THAT THERE WERE NO PROBLEMS EXPERIENCED THE PREVIOUS DAY. IF THERE WERE ANY PROBLEMS, VERIFY THAT ALL NECESSARY REPAIRS HAVE BEEN COMPLETED.

#### LIFTING PROCEDURES

#### LIFT PREPARATION AND VEHICLE POSITIONING

- PERFORM PRE-OPERATION CHECK LIST ITEM BY ITEM.
- POSITION THE SWING ARMS TO THE OUTSIDE OF THE UNIT.
- POSITION THE VEHICLE CENTERED BETWEEN THE POSTS.

#### NOTE:

ALIGN THE VEHICLE'S CENTER OF GRAVITY WITH THE CENTERLINE OF THE POSTS. THIS CAN BE VERIFIED BY VIEWING THE CAM FOLLOWER BEARINGS ON THE CARRIAGE. THESE BEARINGS ARE LOCATED AT EACH CORNER OF THE CARRIAGE. CENTERING OF VEHICLE IS ACHIEVED WHEN ALL 4 CAM FOLLOWER BEARINGS ARE FREE TO SPIN.

 PLACE THE LIFTING PADS PER MFG'S RECOMMENDED LIFT POINTS FOR THE VEHICLE. REFER TO ALI/LP-GUIDE, ALI/SMO1-2 "LIFTING IF RIGHT" GUIDE, AND REFER TO THE RECOMMENDED LOCATION AND FORMAT OF THE VEHICLE LIFT POINT LABEL PER ANSI/SAE J2184-OCT92.

#### **CAUTION:**

IF PROPER AND SAFE LIFTING POINTS ON THE FRAME OF THE VEHICLE CAN NOT BE REACHED BY THE LIFTING PADS, DO NOT RAISE THE VEHICLE!

#### TO RAISE

- ENGAGE THE UP-BUTTON ON THE POWER UNIT. STOP AND VERIFY LIFTING PAD POSITION WHEN THE LIFTING PADS HAVE MADE CONTACT WITH THE VEHICLE.
- RAISE VEHICLE TO THE DESIRED WORKING HEIGHT.
- DEPRESS THE DOWN BUTTON AND LOWER THE UNIT ONTO THE MECHANICAL SAFETIES.

#### TO LOWER

- INSPECT THE LIFTING AREA TO INSURE THAT ALL PERSONNEL AND DEBRIS HAVE BEEN CLEARED FROM THE LIFTING AREA.
- DEPRESS THE UP-BUTTON ON THE POWER UNIT. RAISE UNIT APPROXIMATELY TWO INCHES.
- DEPRESS THE LOCK RELEASE AND DOWN BUTTON. LOWER UNIT TO THE DESIRED WORKING HEIGHT.
- ALWAYS RAISE UNIT UNTIL BOTH MECHANICAL SAFETIES RE-ENGAGE. DEPRESS THE DOWN-BUTTON LOWERING THE UNIT ONTO THE MECHANICAL SAFETIES
- IF WORK IS COMPLETE, CONTINUE LOWERING THE UNIT UNTIL BOTH CARRIAGES ARE FULLY LOWERED.

**NOTE:** IF FOR ANY REASON, THE LIFT BECOMES INOPERATIVE IN THE RAISED POSITION WITH A VEHICLE ON IT, CONTACT YOUR LOCAL MOHAWK REPRESENTATIVE OR THE MOHAWK FACTORY.

#### MAINTENANCE PROCEDURES

#### QUALIFIED MAINTENANCE PERSONNEL ONLY

#### **DAILY**

- PERFORM THE PRE-OPERATION CHECK LIST.
- REPORT ANY AND ALL EQUIPMENT MALFUNCTIONS IMMEDIATELY.
- CLEAN ALL MOVING PARTS. (IT IS NOT RECOMMENDED TO GREASE THE INSIDE OF THE CHANNEL ON THE POST, SWING ARMS OR SWING ARM RESTRAINTS. ) IF OXIDIZATION IS OCCURRING USE A LIGHT LUBRICANT. (WD-40 OR EQUIVALENT)
- KEEP AREA AROUND THIS EQUIPMENT FREE OF DIRT, SAND, WATER, ETC.

#### WEEKLY

- PERFORM THE DAILY OPERATION CHECK LIST.
- PERFORM THE HYDRAULIC SAFETY CHECKS. ( SEE TROUBLE SHOOTING )
- WIPE CLEAN, THE CYLINDERS' WIPER SEALS AND THE BASE OF EACH POST TO REMOVE ANY WEEPING OIL AND DUST.
- VERIFY FLUID LEVEL. WITH THE UNIT FULLY LOWERED, THE FLUID LEVEL WILL BE 1/2 INCH BELOW THE BREATHER CAP PORT. USE DEXRON III AS REPLACEMENT FLUID.
- LUBRICATE THE ARM RESTRAINT ASSEMBLIES AS NEEDED TO INSURE FREE, AND SMOOTH OPERATION.
   (DO NOT USE GREASE)
- CYCLE UNIT TO FULL HEIGHT, AND BLEED APPROXIMATELY 30 SECONDS.
- CHECK LUBRICATOR FLUID LEVEL. FILL IF NEEDED.
- DRAIN FILTER REGULATOR OF EXCESSIVE MOISTURE.

#### **MONTHLY**

- INSPECT ALL HYDRAULIC COMPONENTS FOR LEAKS, DEFORMATION, WEAR OR CORROSION.
- TIGHTEN ALL FASTENERS, HYDRAULIC / PNEUMATIC FITTINGS AS REQUIRED.
  - ALL O RING BOSS FITTINGS JAM NUTS ARE TO BE TIGHTENED TO 15 FOOT POUNDS TORQUE.
  - 2. ALL <u>PIPE</u> FITTINGS, IF LEAKING ARE TO BE REMOVED, RE-SEALED, AND RE INSTALLED. ( SELECT UNITE THREAD SEALANT OR EQUIVALENT ON FITTING THREADS )
- INSPECT MOUNTING BOLT CONDITIONS FOR ANY POSSIBLE CORROSION AND INSPECT THE FLOOR FOR ANY SIGNS OF FATIGUE OR FRACTURES.

#### **SEMI- ANNUAL TRAINING**

- QUALIFY / RE-QUALIFY ALL PERSONNEL IN THE SAFE OPERATION OF THIS UNIT.
- VERIFY ALL FASTENERS TO PROPER TORQUE:
   SWING ARM NUTS TO 1000 FT-LB
   CARRIAGE STOP FASTENERS TO 170 FT-LB
   CARRIAGE SIDE ROLLER NUTS TO 300 FT-LB
   LIFTING ROD NUTS TO 720 FT-LB
   CYLINDER TOP BOLT TO 720 FT-LB
   ANCHORS (SEE ANCHOR SPECIFICATION SECTION)
- LUBRICATE LOCK BODY MAIN PIVOT PINS. REMOVE WITH SNAP RING PLIERS WHEN FULLY LOWERED AND CLEAN LOCK PIVOT PIN AND LOCK BODY HOLE. SPRAY PIN WITH A LIGHT LUBRICANT (WD-40 OR EQUIVALENT), THEN RE-ASSEMBLE, ENSURING SMOOTH MOTION.
- THE CHANNEL SECTIONS WHERE THE CARRIAGE BEARINGS RIDE AGAINST SHOULD BE CLEANED AND LUBRICATED USING A LIGHT LUBRICANT (WD-40).
- THE MAIN CARRIAGE BEARINGS ARE FACTORY LUBRICATED AND DO NOT REQUIRE ANY ADDITIONAL PERIODIC LUBRICATION. HOWEVER, IF ADDITIONAL LUBRICATION IS DESIRED ON THESE UNDER THE CUSTOMER'S OWN INSPECTION AND MAINTENANCE PROGRAM, IT IS RECOMMENDED TO USE CAM2 MULTIPURPOSE #2 GREASE (PART NO. 86035) OR EQUIVALENT. USE APPROXIMATELY 2 OZ. PER BEARING.

#### **ANNUALLY**

- REPLACE AND RE-BLEED THE HYDRAULIC FLUID. ALWAYS USE A CLEAN FUNNEL AND FILTER. USE DEXRON III HYDRAULIC FLUID.
- INSPECT ALL BEARINGS FOR UNUSUAL OR EXCESSIVE WEAR. (REPLACE IF NEEDED)
- REMOVE THE SWING ARM RESTRAINTS. THOROUGHLY CLEAN. USE A LIGHT LUBRICANT (WD-40 OR EQUIVALENT) REINSTALL. DO NOT USE GREASE.
- REMOVE THE SWING ARMS. THOROUGHLY CLEAN. USE A LIGHT LUBRICANT (WD-40 OR EQUIVALENT) REINSTALL. DO NOT USE GREASE.
- PERFORM THE DAILY, WEEKLY, AND MONTHLY MAINTENANCE PROCEDURES.

#### **PART REPLACEMENT NOTES**

- REPLACE ALL WORN OR BROKEN PARTS WITH GENUINE LIFT MANUFACTURER SUPPLIED PARTS (FROM MOHAWK RESOURCES LTD. ONLY)
- ALL REPLACEMENTS OF PARTS ARE TO BE PERFORMED BY TRAINED LIFT SERVICE PERSONNEL ONLY.

UPON PART REPLACEMENT, LIFT MUST PASS A FULL LIFT INSPECTION AS DEEMED SUITABLE BY TRAINED LIFT SERVICE PERSONNEL.

#### **TROUBLE SHOOTING**

WARNING: NEVER ATTEMPT TO LOOSEN HYDRAULIC FITTINGS, OR OVERRIDE SAFETY DEVICES IN AN ATTEMPT TO CORRECT A PROBLEM. ALL TEST ARE TO BE PERFORMED WITH NO VEHICLE.

**NOTE:** 

- THE HYDRAULIC SAFETY CHECK IS TO BE PERFORMED WITH NO VEHICLE ON THE UNIT.
- CONTACT YOUR LOCAL MOHAWK DISTRIBUTOR OR THE MOHAWK FACTORY IF EITHER TEST FAIL.

#### HYDRAULIC SAFETY CHECK

#### **MAIN SIDE SAFETY CHECK:**

- 1. RAISE THE UNIT APPROXIMATELY 3 FEET
- 2. DISENGAGE THE OFF SIDE MECHANICAL SAFETY
- LOWER THE UNIT ONTO THE MAIN SIDE MECHANICAL SAFETY
- 4. WHILE CONTINUING TO HOLD DOWN THE POWER UNIT LOWERING HANDLE, OBSERVE THE OFF SIDE CARRIAGE FOR MOVEMENT. THE UNIT HAS CHECKED OUT OK IF THEIR IS NO MOVEMENT ( OFF SIDE CARRIAGE DOES NOT CONTINUE TO LOWER )

#### **OFF SIDE SAFETY CHECK:**

- 1. RAISE THE UNIT APPROXIMATELY 3 FEET
- 2. DISENGAGE THE MAIN SIDE MECHANICAL SAFETY
- 3. LOWER THE UNIT ONTO THE OFF SIDE MECHANICAL SAFETY
- 4. WHILE CONTINUING TO HOLD DOWN THE POWER UNIT LOWERING HANDLE, OBSERVE THE MAIN SIDE CARRIAGE FOR MOVEMENT. THE UNIT HAS CHECKED OUT OK IF THEIR IS NO MOVEMENT ( MAIN SIDE CARRIAGE DOES NOT CONTINUE TO LOWER )

	NOT RAISING LOAD
POSSIBLE CAUSE	SOLUTION
LOW HYDRAULIC FLUID LEVEL	LOWER UNIT. REMOVE RESERVOIR BREATHER CAP. FILL UNIT TO WITHIN 1/2 INCH BELOW PORT. USE DEXRON III TRANSMISSION / HYDRAULIC FLUID.
PRESSURE RELIEF ADJUSTMENT	CONSULT MOHAWK SERVICE DEPARTMENT
PRESSURE RELIEF CONTAMINATION	REFER TO POWER UNIT SPECIFICATIONS. REMOVE AND CLEAN DEBRIS FROM VALVE ASSEMBLY.
VOLTAGE TO POWER UNIT	REFER TO POWER UNIT SPECIFICATIONS. CONSULT AN ELECTRICIAN
UNIT OVERLOADED	VEHICLE TO HEAVY TO BE RAISED
	NOT LOWERING
FLOW CONTROL VALVE	CLOSE FLOW CONTROL VALVE. OPEN TWO TURNS. RAISE UNIT THEN LOWER.
MECHANICAL LOCKS ENGAGED	RAISE UNIT. DISENGAGE MECHANICAL LOCKS.
UNIT UNEVEN ( SIDE TO SIDE )	RAISE UNIT TO FULL HEIGHT TO EQUALIZE. THEN LOWER  - OR - USE DIVERTER VALVE TO EQUALIZE
POSTS OUT OF SQUARE	VERIFY LEVEL ASSEMBLY, MAKE ANY AND ALL NECESSARY ADJUSTMENTS.
DEBRIS IN POSTS ( TOOLS ETC. )	CLEAN UNIT
OBSTRUCTION UNDER VEHICLE OR LIFT	REMOVE OBSTRUCTION.
	RAISING UNEVEN S HIGH, RUN UNIT TO FULL HEIGHT. IF THE MAIN SIDE IS LOW, LOWER UNIT TO IE FOR THE OFF SIDE TO EQUALIZE.
AIR IN SYSTEM	BLEED UNIT. REFER TO BLEEDING PROCEDURES.
	THE CARRIAGE BEARINGS ON THE MAIN AND OFF SIDE MUST NOT CONTACT THE CARRIAGE STOPS. ( RESULT OF INCORRECT ROD ADJUSTMENT.)

#### MOHAWK MODEL TP-26A & TP-30A & TP-26-WB & TP-30-WB

#### TROUBLE SHOOTING CONTINUED

RAISING UNEVEN CONTINUED			
POSSIBLE CAUSE	SOLUTION		
POSTS OUT OF SQUARE	VERIFY LEVEL ASSEMBLY. MAKE ANY AND ALL NECESSARY ADJUSTMENTS.		
SHOP FLOOR UNEVEN	VERIFY PROPER INSTALLATION OF MAIN SIDE POST. MAIN SIDE TO BE ON HIGH SIDE.		
	ALSO SEE SPECIAL LIFTING PADS.		
MAIN SIDE CYLINDER	PERFORM HYDRAULIC SAFETY CHECKS. CHECK FOR INTERNAL HYDRAULIC LEAKS		
	SLOW DRIFT DOWN		
SAFETIES NOT ENGAGED	RAISE UNIT TO RE-ENGAGE SAFETIES. THEN LOWER UNIT ONTO SAFETIES.		
POWER UNIT LOWERING VALVE CONTAMINATION	BACK FLUSH POWER UNIT : PULL DOWN ON THE LOWERING HANDLE, THEN ENGAGE THE UP BUTTON AT THE SAME TIME. RUN UNIT APPROX. 10 SEC.		
EMERGENCY LOWERING VALVE OPEN	FULLY CLOSE THE VALVE. TIGHTEN SET SCREW.		
POPI	PING NOISE WHEN RAISING		
LOAD NOT CENTERED	VEHICLE IS TO FAR FORWARD OR TOO FAR BACK. POSITION THE VEHICLE SO THAT THE TWO TOP CAM BEARINGS ( BEARINGS ON THE CARRIAGE WHICH RIDE ON THE EDGE OF THE POST CHANNEL ) ARE FREE TO SPIN WHEN ALL FOUR TIRES ARE OFF THE FLOOR.		
	 ERNAL HYDRAULIC LEAKS NALL FITTINGS PER SPECIFICATIONS.		
MAIN SIDE CYLINDER	THOROUGHLY CLEAN THE CYLINDER. VERIFY LEAK ORIGIN. FITTINGS ARE TO BE TIGHTENED PER SPECIFICATIONS		
OFF SIDE CYLINDER	THOROUGHLY CLEAN THE CYLINDER. VERIFY LEAK ORIGIN. FITTINGS ARE TO BE TIGHTENED PER SPECIFICATIONS.		
BAD FLAIR OR FITTING	REMOVE THE HYDRAULIC LINE AND INSPECT FLAIR AND FITTING FOR DEFORMATION. REPLACE IF NEEDED.		
BAD O-RING ( O-RING TYPE FITTINGS )	CHANGE O-RING		
LOOSE PIPE FITTING	REMOVE, RESEAL, AND RE-INSTALL FITTING. SEAL ALL PIPE FITTING CONNECTIONS WITH THREAD SEALANT MOHAWK PART # 601-610-002 NOTE: DO NOT USE TEFLON TAPE.		

MODEL:			
SERIAL	NUMBER:		
DATE OF	FINSTALLATION:		
	SERVICE (	<u>CHART</u>	
DATE	PART REPLACED / SERVICED	SERVICE COMPANY	SERVICED BY
L	MAINTENANO	CE CHART	
DATE	MAINTENANCE PERFORMED	SERVICE COMPANY	SERVICED BY

# **MOHAWK**

MADE IN THE U.S.A.

# MODELS TP-26A & TP-30A TP-26-WB & TP-30-WB

# FIGURES & DIAGRAMS





# MOHAWK RESOURCES LTD.


P.O. BOX 110 65 VROOMAN AVENUE AMSTERDAM, NY 12010 **TOLL FREE :** 1-800-833-2006


**LOCAL**: 1-518-842-1431 **FAX**: 1-518-842-1289

INTERNET: WWW.MOHAWKLIFTS.COM E-MAIL: SERVICE@MOHAWKLIFTS. COM

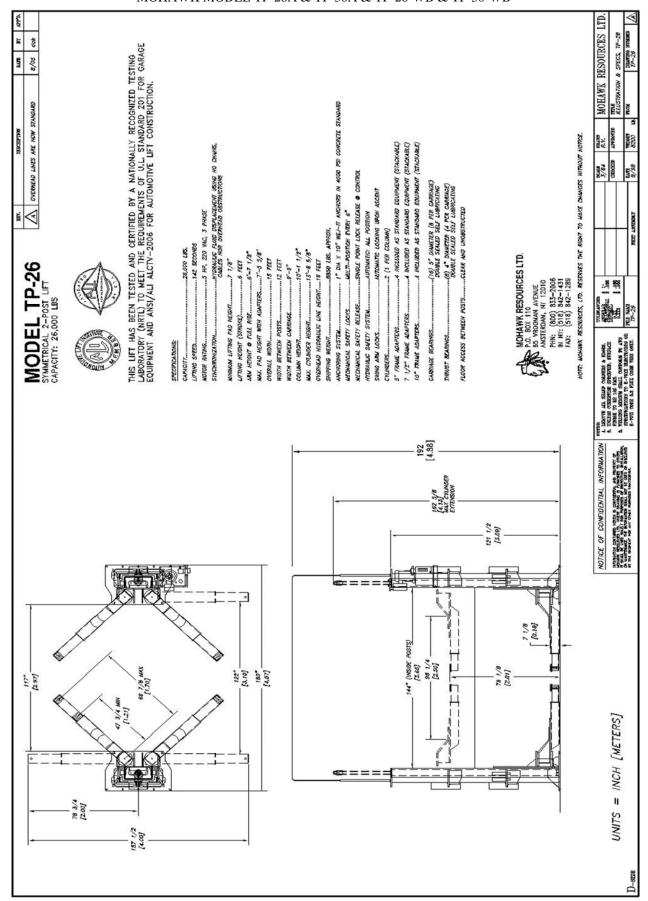


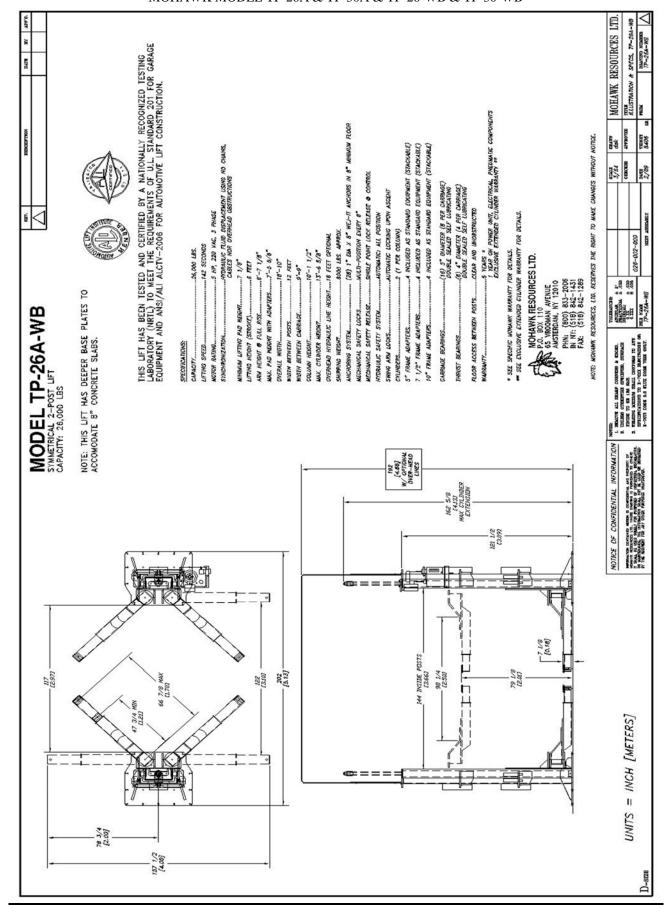


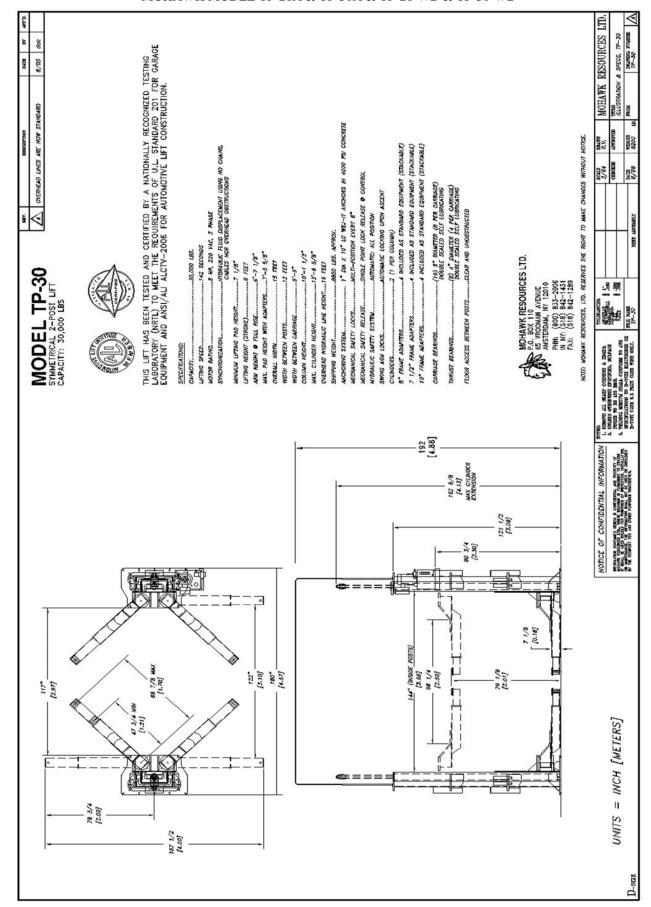

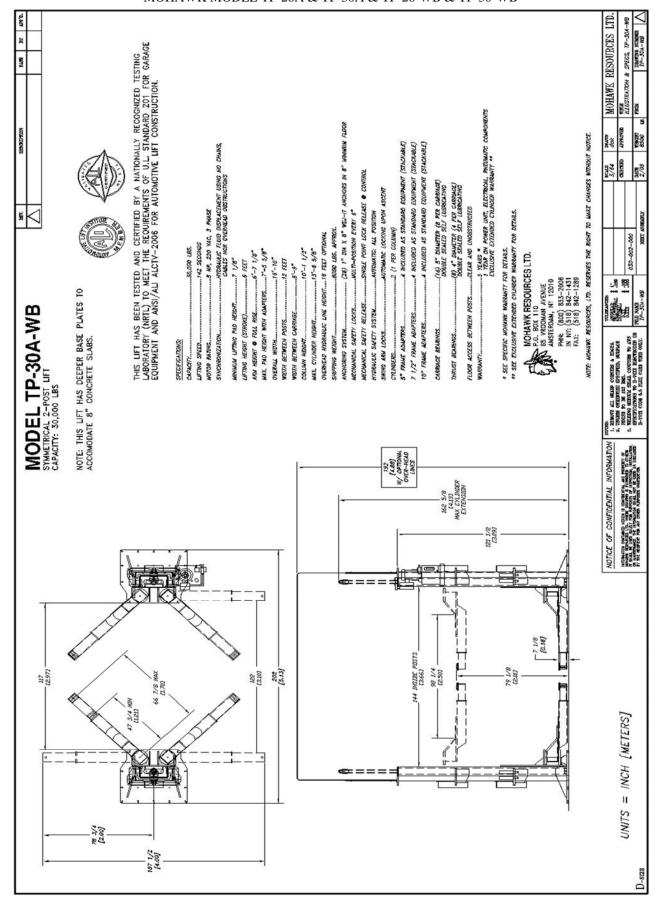


#### MOHAWK MODEL TP-26A & TP-30A & TP-26-WB & TP-30-WB

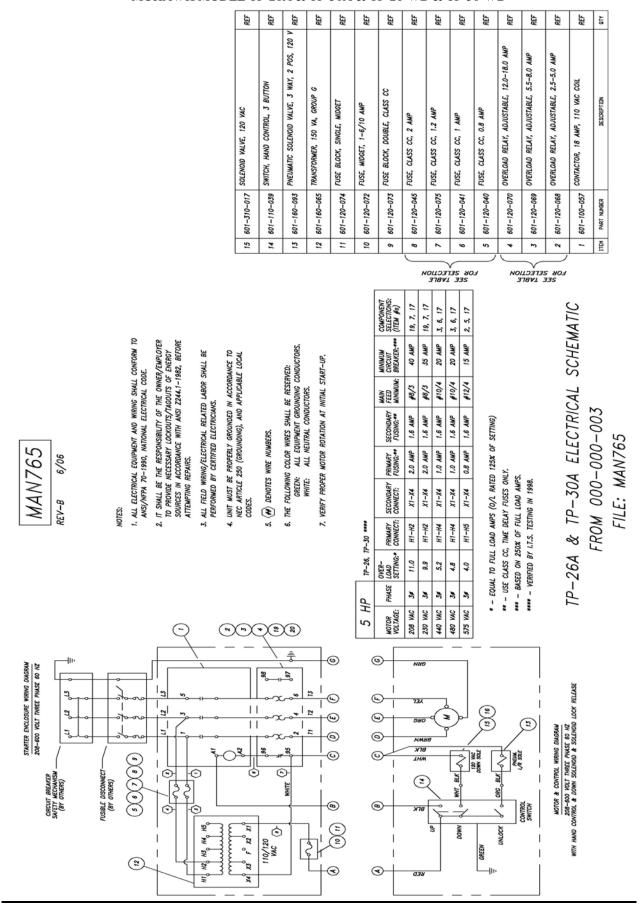

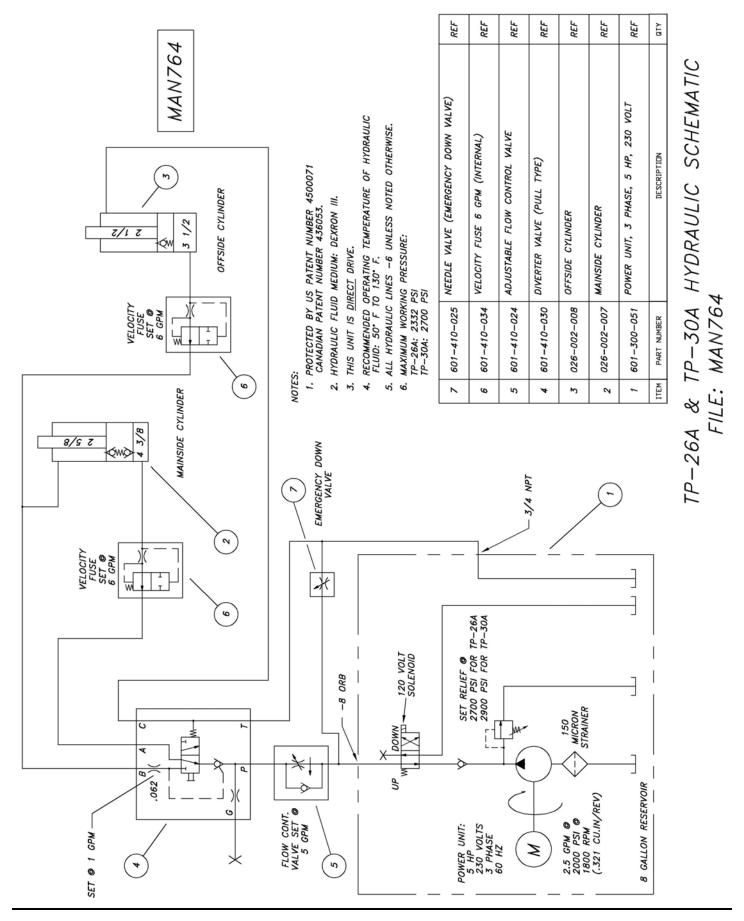

22

# BAY SIGHT LAYOUT

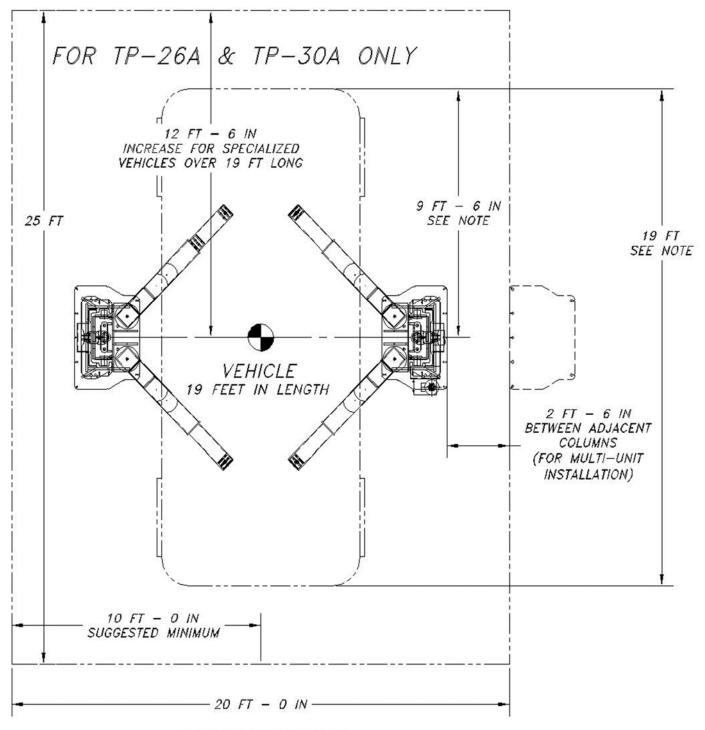


# IMPORTANT NOTE

MOST VEHICLES' CENTER OF GRAVITY (C.O.G.) LIE BETWEEN WHEEL BASE CENTERS, HOWEVER, SOME VEHICLES C.O.G. MAY BE OFFSET. VERIFY THE CENTER OF GRAVITY ON THE VEHICLE FLEET TO INSURE REAR AND FRONT ACCESS OF THE VEHICLE.

FILE: MANO65

# BAY SIGHT LAYOUT

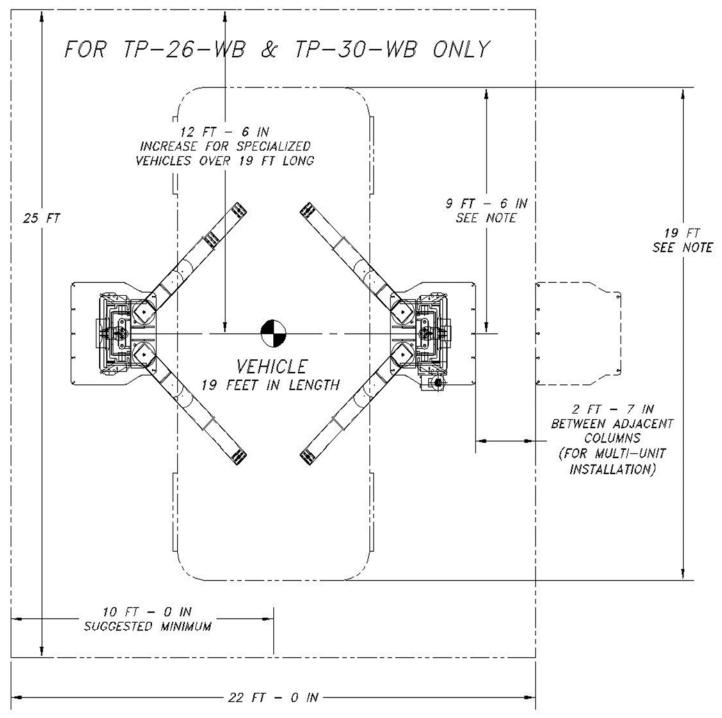



## IMPORTANT NOTE

MOST VEHICLES' CENTER OF GRAVITY (C.O.G.) ULLE BETWEEN WHEEL BASE CENTERS, HOWEVER, SOME VEHICLES C.O.G. MAY BE OFFSET. VERIFY THE CENTER OF GRAVITY ON THE VEHICLE FLEET TO INSURE REAR AND FRONT ACCESS OF THE VEHICLE.


FILE: MANO65A


#### MOHAWK MODEL TP-26A & TP-30A & TP-26-WB & TP-30-WB

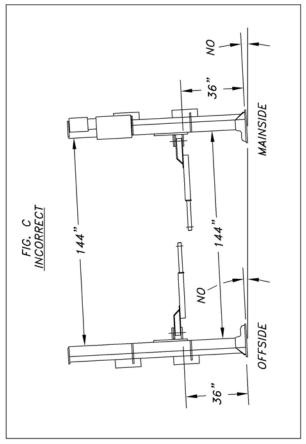


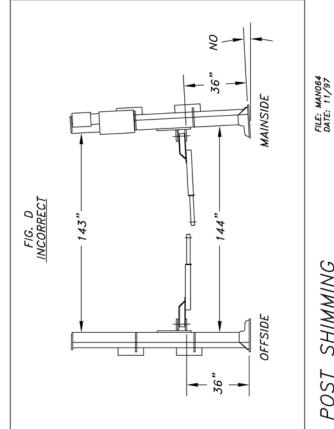

POST SHIMMING

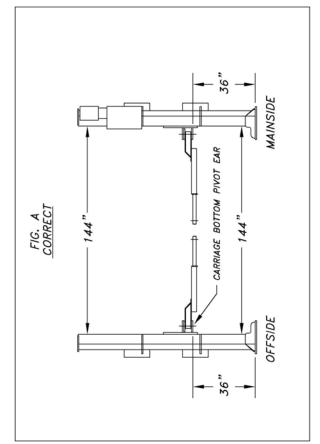

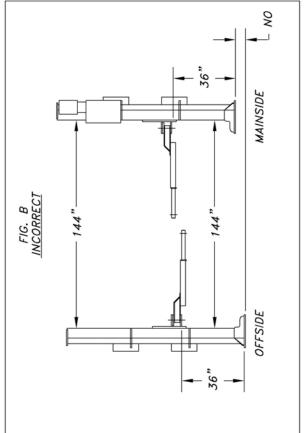

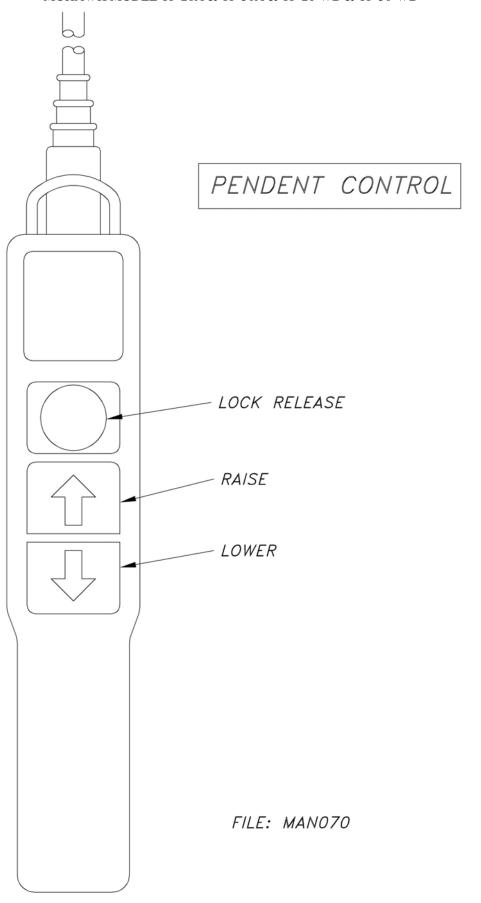

# **MOHAWK**

MADE IN THE U.S.A.

# MODELS TP-26A & TP-30A TP-26-WB & TP-30-WB

# **PARTS**





# MOHAWK RESOURCES LTD.


P.O. BOX 110 65 VROOMAN AVENUE AMSTERDAM, NY 12010 TOLL FREE: 1-800-833-2006


**LOCAL**: 1-518-842-1431 **FAX**: 1-518-842-1289


**INTERNET:** WWW.MOHAWKLIFTS.COM **E-MAIL:** SERVICE@MOHAWKLIFTS. COM

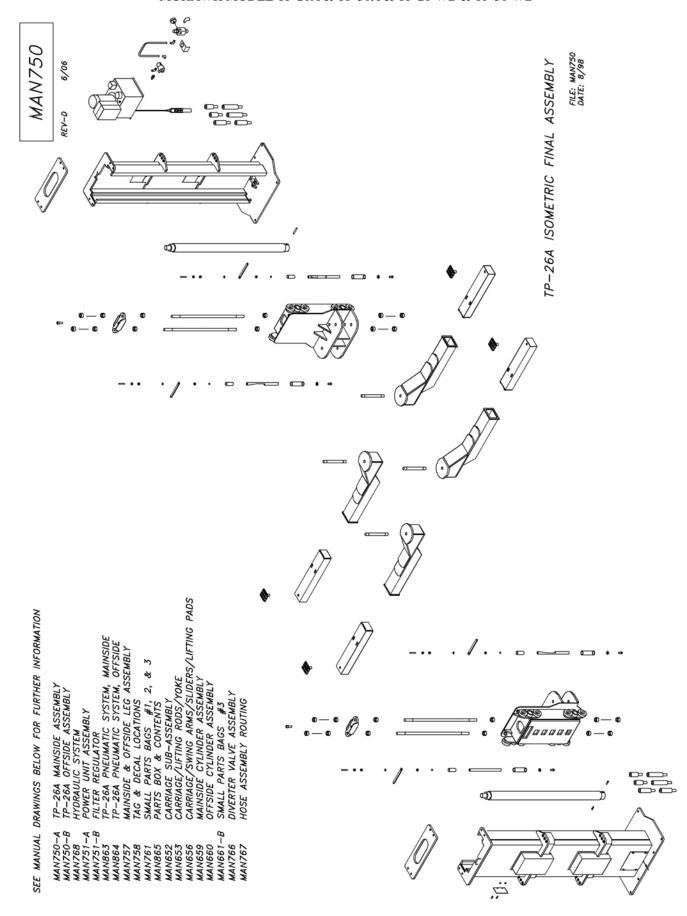


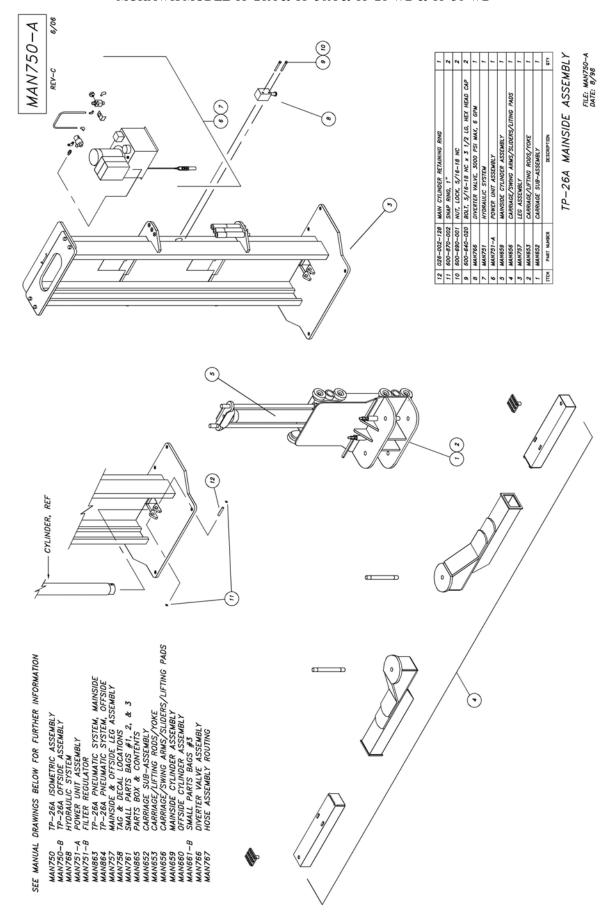

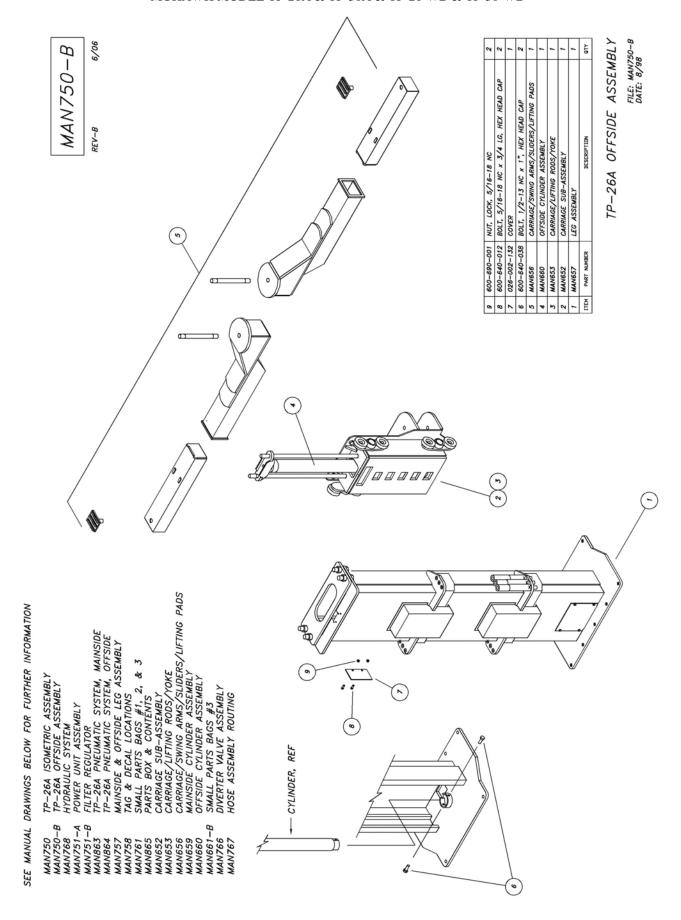

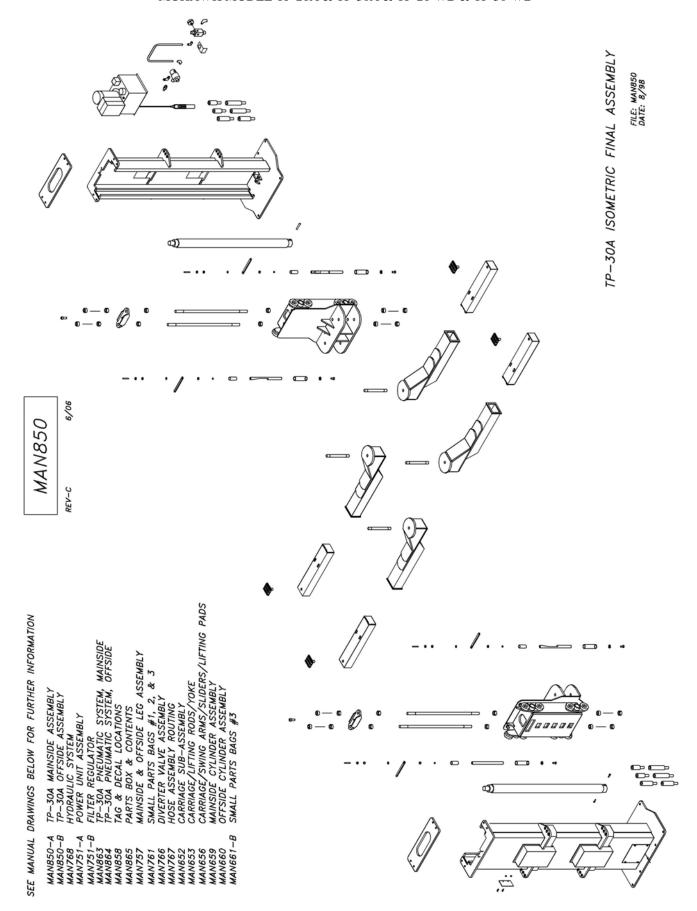

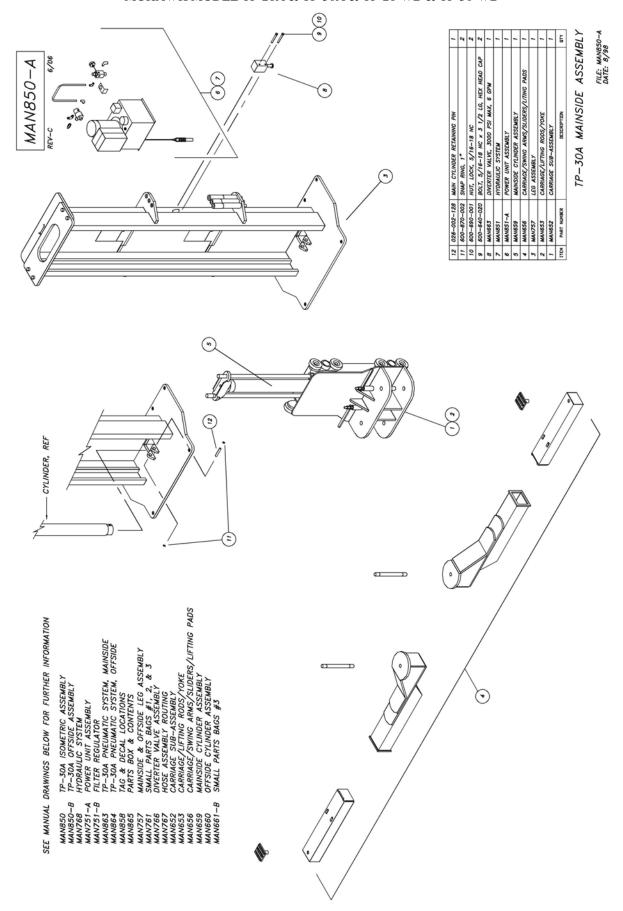

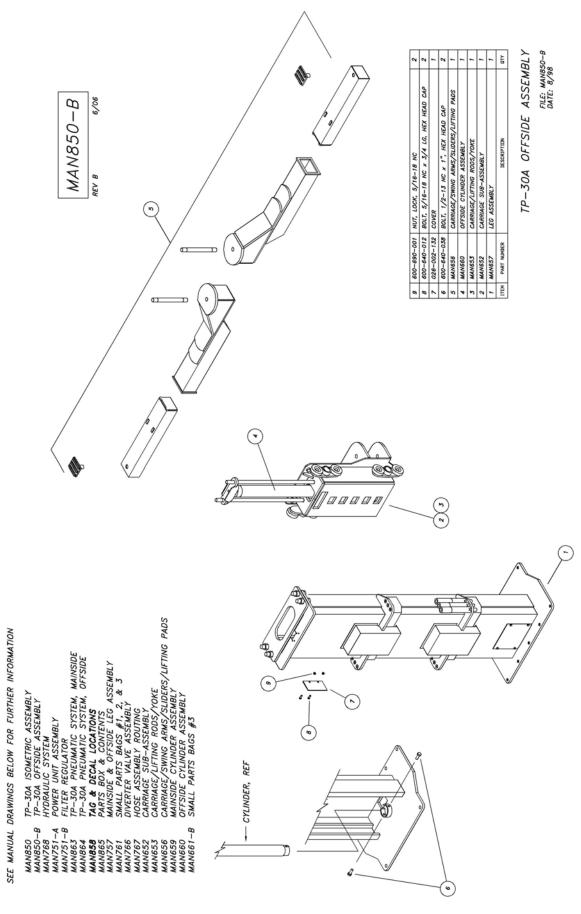

REF

REF

REF REF REF REF

REF

REF REF

## MAN768

(2)

REV-A

5/06

REF REF REF

(3)

(2)

(Z)

(E)

(S) (S)

(%)

(8)

(5)

E

(2)

(4)

REF REF REF

	(8)	(1)	(1)	(1)	(2)	(1)	(1)	(2)	(1)	(1)	(1)	(1)	(1)	PIPE (1)	(1)	(1)	(4)	(1)	'E (1)	$\mathcal{O}$	(1)
	ELBOW, 90°, #6 ORB TO #6 JIC AEROQUIP #2062-6-6S	DIVERTER VALVE, 3000 PSI MAX, 6 GPM FLUID POWER #242239AA	TUBING ASSEMBLY, 70 3/4"	TUBING ASSEMBLY, 68 1/2"	TUBING ASSEMBLY, 76"	HOSE ASSEMBLY, 75"	HOSE ASSEMBLY, 70"	ELBOW, 90', #6 JIC MALE TO #6 JIC MALE AEROQUIP #2039-6-6S	NEEDLE VALVE, 8 GPM PARKER #N-600-S	TEE, 3/8 FEMALE PIPE TO 3/8 MALE PIPE AEROQUIP #2093-6-6S	FLOW CONTROL VALVE, 8 GPM PARKER #F-600-S	TEE, 3/8 MALE PIPE TO #6 JIC AEROQUIP #2030-6-6S	ELBOW, 90°, 3/8 MALE PIPE TO #6 JIC MALE AEROQUIP #2024-6-6S	ELBOW, 90°, 3/8 FEMALE PIPE TO 3/8 MALE AEROQUIP #2089-6-6S	UNION, 3/8 MALE PIPE TO 3/8 MALE PIPE AEROQUIP #2083-6-6S	STRAIGHT, 3/8 FEMALE PIPE TO #8 ORB AEROQUIP #2216-6-8S	TUBING ASSEMBLY, 93 3/4"	TUBING ASSEMBLY, 20"	REDUCER, 3/4 MALE PIPE TO 1/4 FEMALE PIPE AEROQUIP #2081-12-4S	ELBOW, 90; 1/4 MALE PIPE TO #6 JIC AEROQUIP #2024-4-6S	POWER UNIT SUB-ASSEMBLY
	601-420-017	601-410-030	026-002-013	026-002-014	000-001-035	026-002-059	026-002-058	601-420-052	601-410-025	601-420-057	601-410-024	601-420-012	601-420-007	601-420-010	601-420-022	601-420-056	018-012-019	026-002-048	601-420-058	601-420-014	026-002-044
	21	20	19	18	17	16	15	14	13	12	11	10	6	8	7	9	5	4	З	7	1
	(				R) (3	9															
)-			$\overline{}$			P	(\$)	(ž)				REF	REF	REF	REF	REF	REF	REF	REF	REF	REF
_	_	• —	7_	(g	)							(1)	$\Omega$	(2)	(1)	(1)	(1)	(1)	(2)	(8)	(1)

# TP-30A HYDRAULIC SYSTEM ઇ TP-26A

ITEM PART NUMBER


(1) REF QTY TEE (BRANCH), #6 ORB TO #6 JIC AEROQUIP #203003-6-6S MAINSIDE CYLINDER ASSEMBLY TUBING ASSEMBLY, 136 1/2" TUBING ASSEMBLY, 136 1/2" OFFSIDE CYLINDER ASSEMBLY TUBING ASSEMBLY, 63 1/4" TUBING ASSEMBLY, 66 1/4" UNION, #6 JIC TO #6 JIC AEROQUIP #2027-6-6S TUBING ASSEMBLY, 120" VELOCITY FUSE, 6 GPM VONBERG #28135-6 601-420-046 000-001-079 026-002-008 018-012-016 026-002-007 018-012-018 020-000-026 601-410-034 018-012-015 601-420-011 PART NUMBER 31 29 27 23 ITEM 30 28 26 25 24 22

REF REF REF REF


REF


SEE DKAMING MANZEZ

**LOR HOSE BOUTING AND ASSEMBLY** 

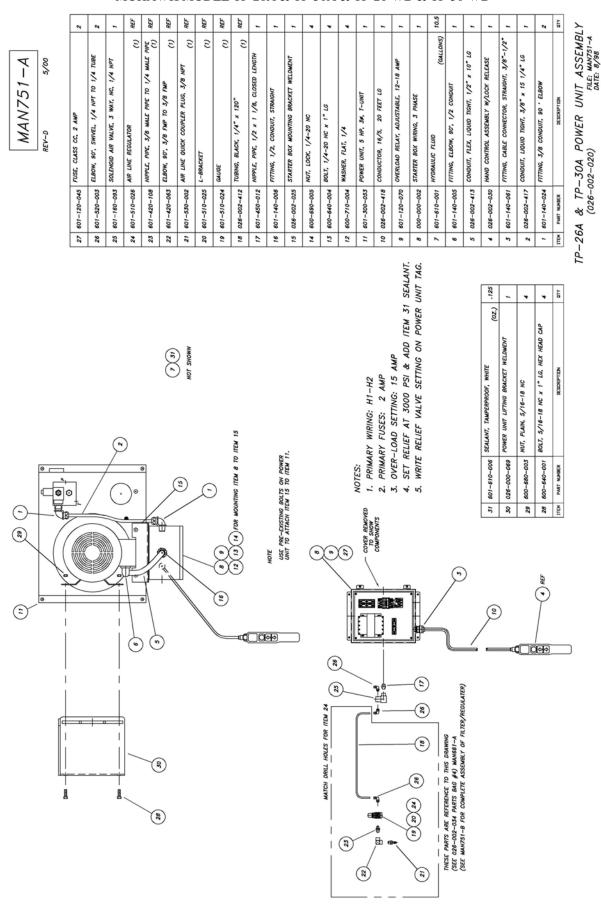

35

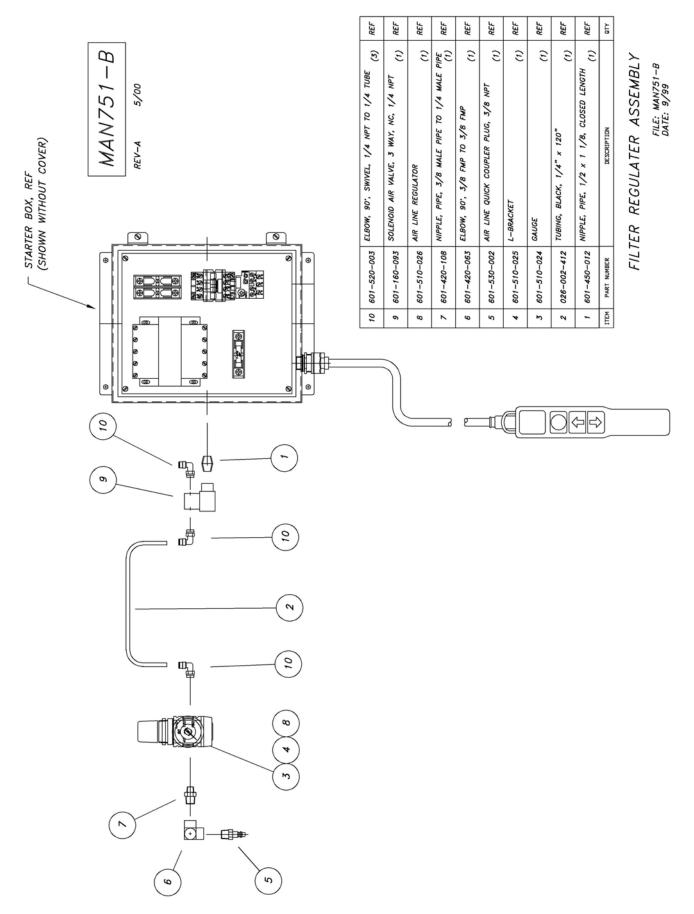

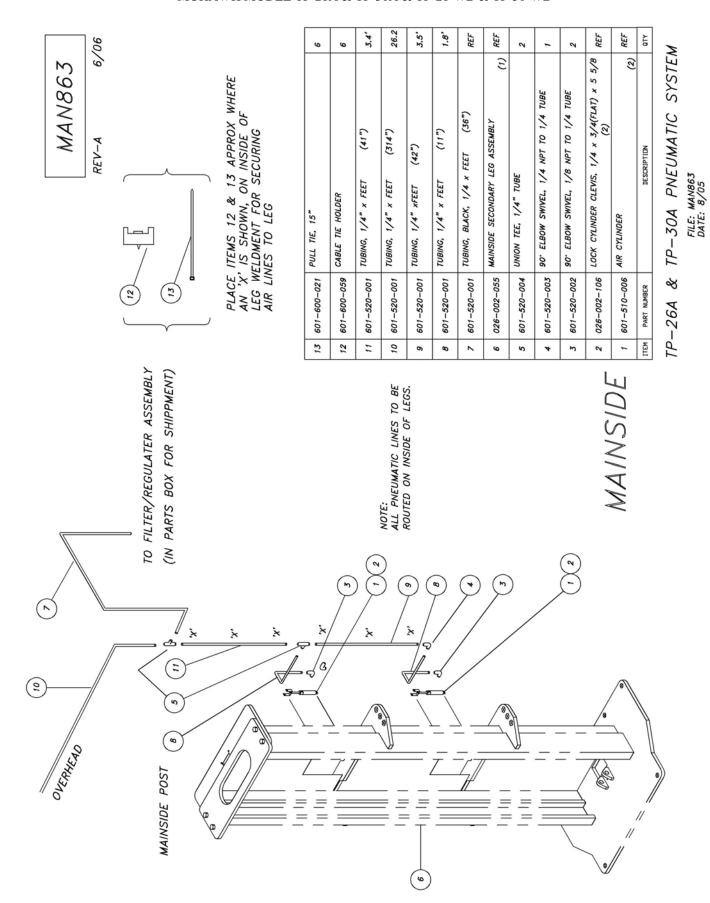

TP-264 & TP-30A PNEUMATIC SYSTEM


		REF		,	2	9	9	_	7	7	REF	REF	QTY
MAN864	90/9	BLY (OFF) (1)							1/4 TUBE	1/4 TUBE	(2)	(2)	
MAI	REV-A	OFFSIDE SECONDARY LEG ASSEMBLY (OFF)		TUBING, 1/4" x 42" LG	TUBING, 1/4" x 11" LG	CABLE TIE HOLDER	PULL TIE, 15"	UNION TEE, 1/4" TUBE	90° ELBOW SWIVEL, 1/4 NPT TO 1/4 TUBE	90" ELBOW SWIVEL, 1/8 NPT TO 1/4 TUBE	CLEVIS WELDMENT	AIR CYLINDER	DESCRIPTION
				TUBING	TUBING	CABLE	PULL	UNION		90. EL			
		026-002-027		026-002-407	026-002-406	601-600-059	601-600-021	601-520-004	601-520-003	601-520-002	026-002-024	601-510-006	PART NUMBER
		11	10	9	80	^	9	'n	4	м	2	1	M3LI
© OFFSIDE POST	OFFS/DE	i.x		×			NOTE: ALL PNEUMATIC LINES TO BE	ROUTED ON INSIDE OF LEC	_		7.//		
	PLACE ITEMS 6 & 7 APPROX WHERE AN 'X' IS SHOWN, ON INSIDE OF LEG WELDMENT FOR SECURING AIR LINES TO LEG		(3)				6			(a)	(3)	(1)(2)	)

38


CARRIAGE SUB-ASSEMBLY
FILE: MANGS2
DATE: 11/97


	Middle	The same of	
YTO	NESCRIPTION	PART MINTER	MALL
7	BOLT, 3/4-16 NF x 1 1/2, HEX HEAD CAP	600-640-031	1
7	WASHER, FLAT, 3/4	600-710-001	2
7	SPRING, 8 1/4 LG	600-840-016	ъ
7	026-000-101 ARM RESTRAINT	026-000-101	*
2	SLEEVE	018-000-103 SLEEVE	2
7	WASHER, LOCK, 1/2	600-720-005	9
9	NUT, PLAIN, 1/2-13 NC	600-680-001	7
2	HANDLE	018-000-101	8
7	WASHER, FLAT, 1/2	600-710-008	6
7	018-000-102 ALL THREAD ROD, 1/2-13 NC x 4"	018-000-102	10
12	SNAP RING, #5100-137	600-870-001	11
8	CARRIAGE ROLLER ASSEMBLY, 5"	026-000-046	12
*	BEARING HOLDER	026-000-007	13
1	TRIM-LOK, 68"	026-000-404	14
1	CARRIAGE WELDMENT	026-002-003	15
*	16 050-000-047 CARRIAGE ROLLER ASSEMBLY, 4"	050-000-047	16

MAN652

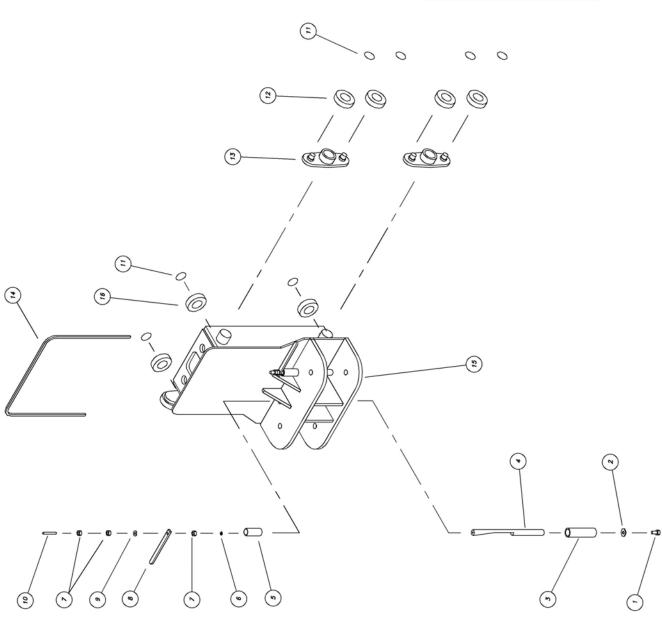



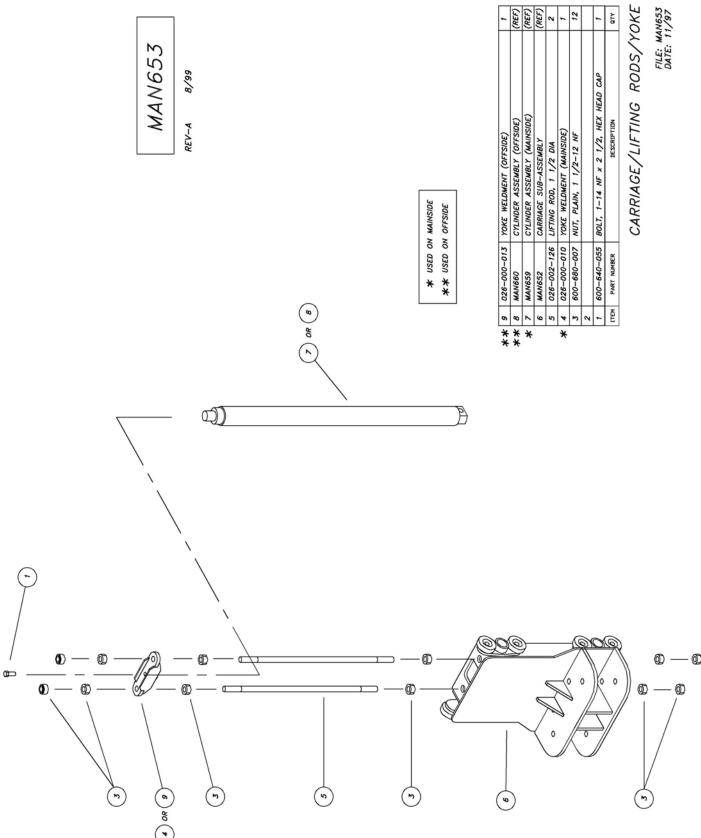

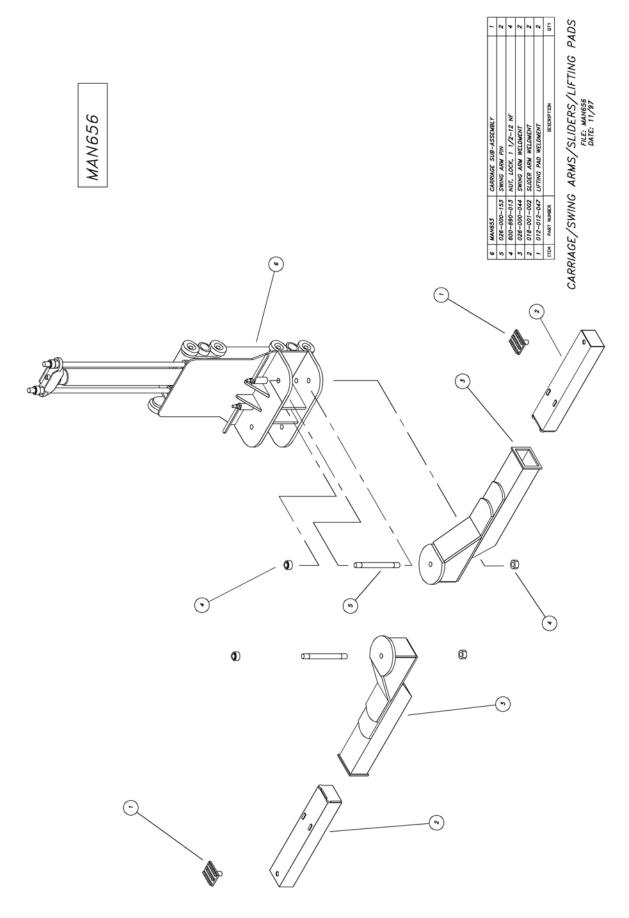


MAN757


66/6


REV-A


-		- On 00 17 1	
-	600-640-067	BOLI, 1/4-ZO NC X 3 HEX HEAD CAP	7
-	600-640-053	BOLT, 5/16–18 NC × 1/2" HEX HEAD CAP	12
	026-002-105	ACCESS HOLE COVER	-
	026-002-104	LOCK COVER	8
	026-002-106	LOCK CYLINDER CLEVIS	7
	601-420-003	SLEEVE, 3/8 TUBE	4
	601-510-006	AIR CYLINDER	7
	600-690-005	NUT, LOCK, 1/4-20 NC	7
	600-690-001	NUT, LOCK, 5/16–18 NC	7
	600-640-068	BOLT, 5/16-18 NC x 3" HEX HEAD CAP	8
	026-002-130	LOCK BODY PIN, 1 1/2 DIA	7
	600-870-004	SNAP RING, #5100-150	4
	026-002-107	тоск вору	7
	600-690-003	NUT, LOCK, 3/4-16 NC	4
	600-710-001	WASHER, FLAT, 3/4	80
	026-002-002	OFFSIDE LEG WELDMENT	-
	026-002-001	MAINSIDE LEG WELDMENT	-
	026-002-114	CARRIAGE STOP	1
	600-640-011	BOLT, 3/4-16 NC x 3 1/2 HEX HEAD CAP	4
	PART NUMBER	DESCRIPTION	ΩTY

MAINSIDE & OFFSIDE LEG ASSEMBLY FILE: MAN757 DATE: 8/98

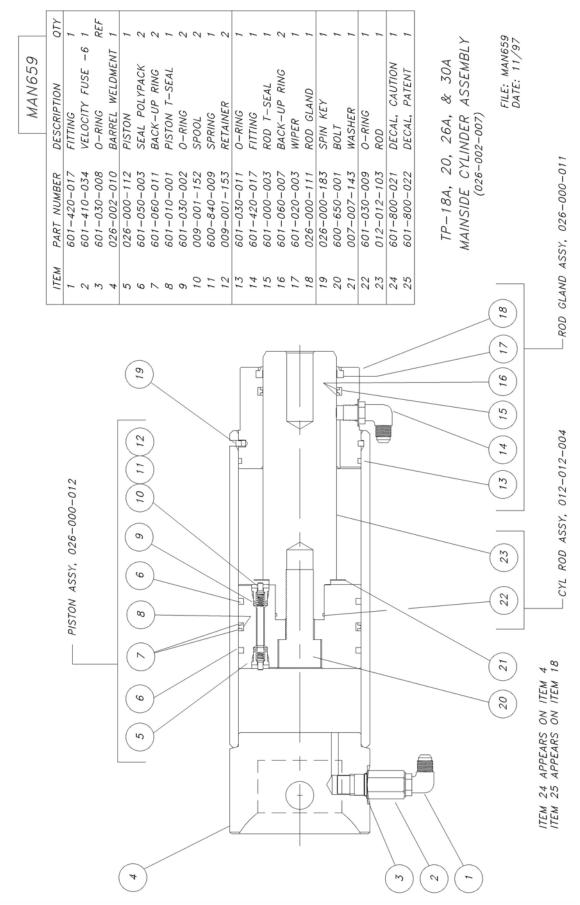


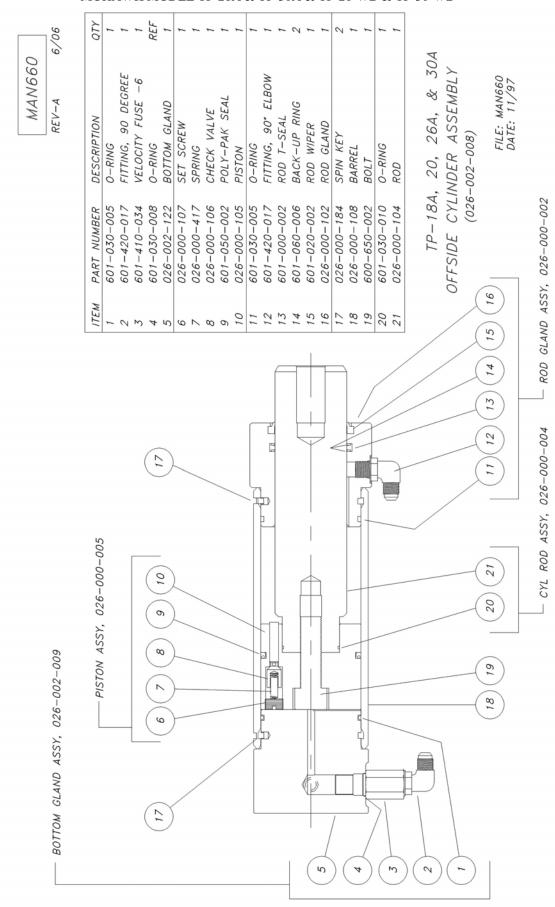


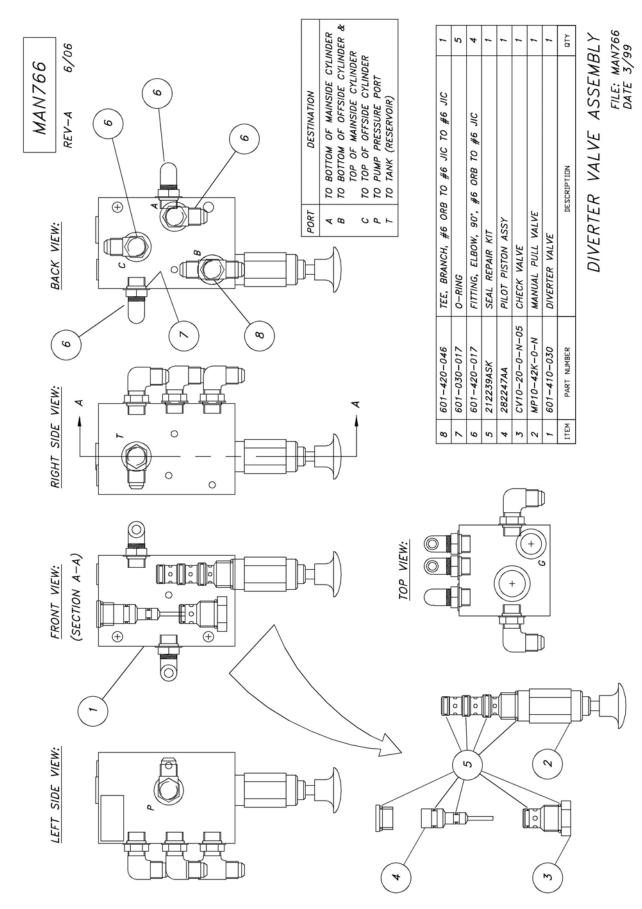

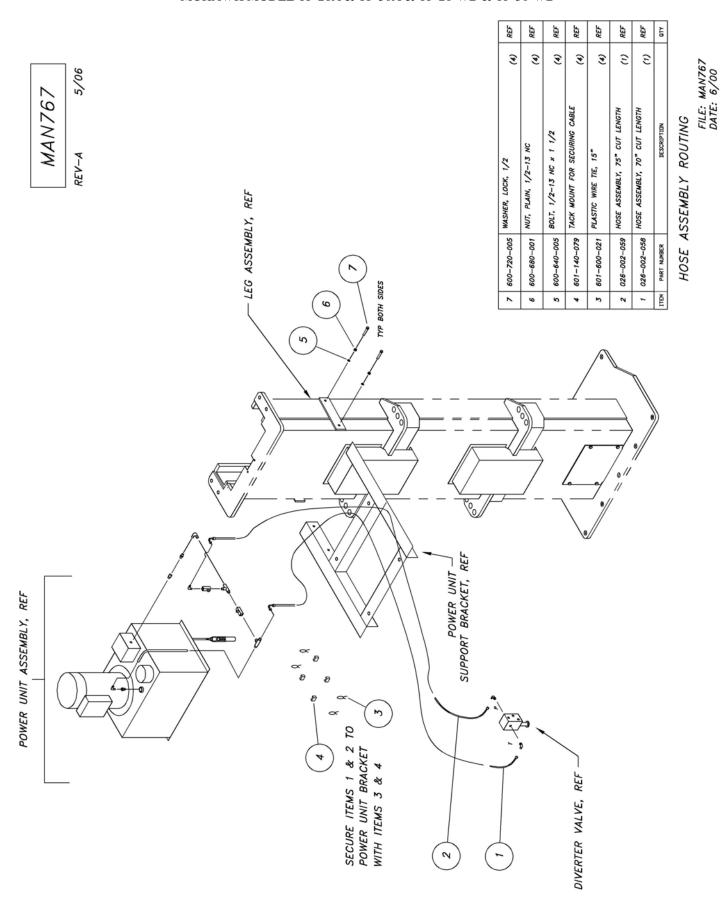


46

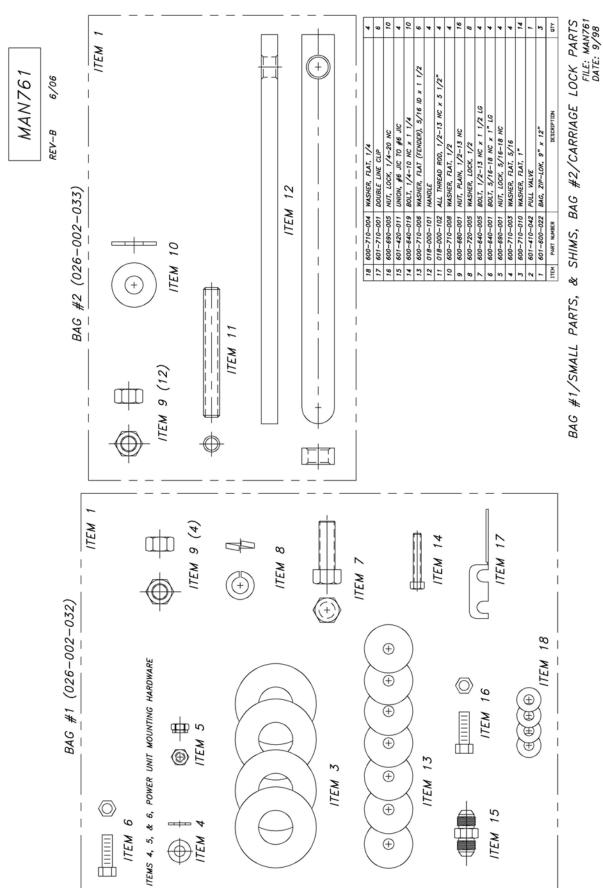

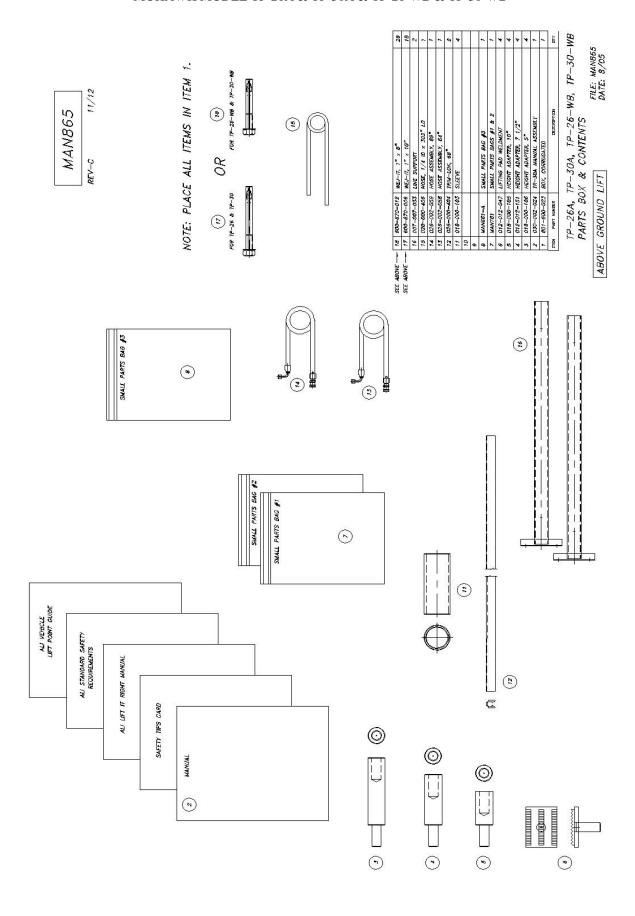

39

8

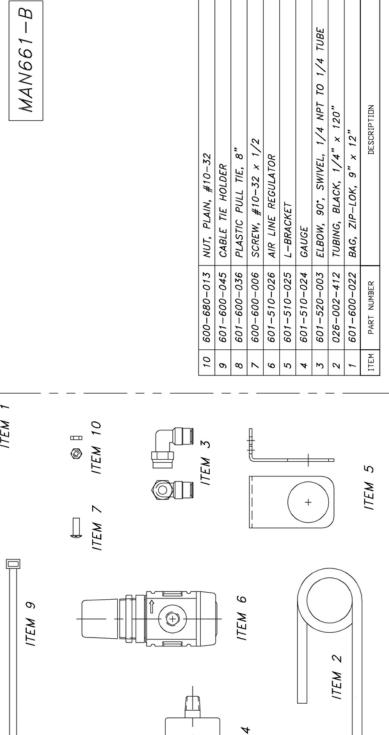


BAG #3 (026-002-034)

BAG #4/FILTER, REGULATOR & SMALL PARTS FILE: MAN661-B DATE: 6/06

QTY

7

ITEM 8

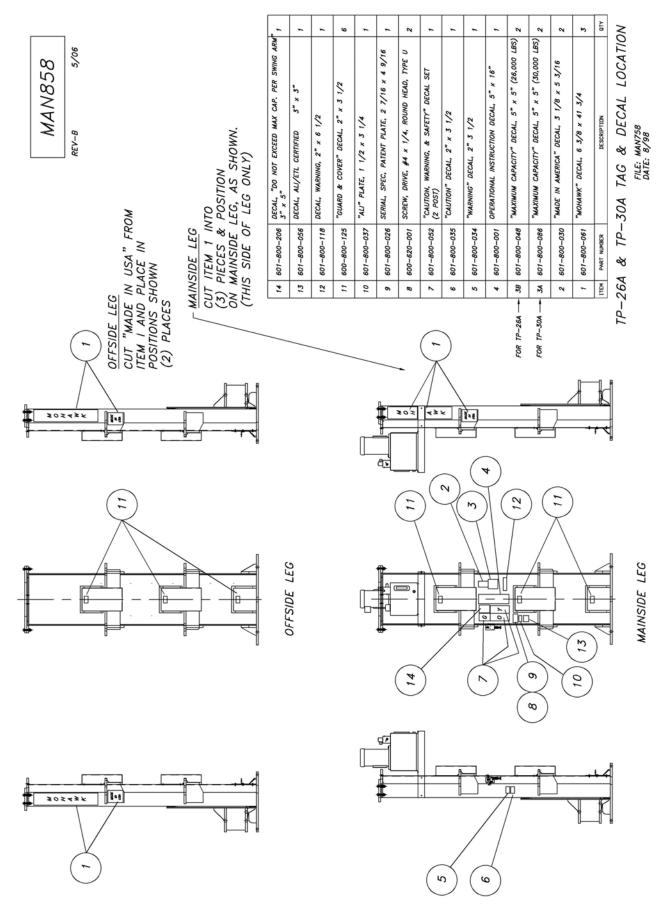

## MOHAWK

# PRE-EXISTING SLAB REQUIREMENTS & NEW SLAB RECOMMEDATIONS



#### MOHAWK RESOURCES LTD.

65 VROOMAN AVE. AMSTERDAM, NY 12010 TOLL FREE: 1-800-833-2006 LOCAL: 1-518-842-1431

**FAX**: 1-518-842-1289

INTERNET: www.MOHAWKLIFTS.com E-MAIN: Service@MOHAWKLIFTS.com

#### Mohawk Resources Ltd.



#### **PRE-EXISTING Minimum Floor Requirements**

Mohawk Lift Model	Minimum Slab Thickness	Minimum Compressive Strength	Reinforcement Size	Reinforcement Spacing (Rebar)
A-7	4-1/2"	4000 psi with 28 day aging	#6 rebar	12 in.
System IA	4-1/2"	4000 psi with 28 day aging	#6 rebar	12 in.
System IA-10	4-1/2"	4000 psi with 28 day aging	#6 rebar	12 in.
LMF-12	6 1/2"	4000 psi with 28 day aging	#6 rebar	12 in.
TP-15	6 1/2"	4000 psi with 28 day aging	#6 rebar	10 in.
TP-16	6 1/2"	4000 psi with 28 day aging	#6 rebar	10 in.
TP-18	8"	4000 psi with 28 day aging	#6 rebar	10 in.
TP-20	8"	4000 psi with 28 day aging	#6 rebar	10 in.
TP-26	12"	4000 psi with 28 day aging	#6 rebar	10 in.
TP-26-W	8"	4000 psi with 28 day aging	#6 rebar	10 in.
TP-30	12"	4000 psi with 28 day aging	#6 rebar	10 in.
TP-30-W	8"	4000 psi with 28 day aging	#6 rebar	10 in.
TR-19	4 1/2"	n/a	ACI Temp only*	ACI Temp only*
FL-25	4 1/2"	n/a	ACI Temp only*	ACI Temp only*
TR-25A	4 1/2"	n/a	ACI Temp only*	ACI Temp only*
TR-33	6" or (4 1/2" **)	n/a	ACI Temp only*	ACI Temp only*
TR-35	6" or (4 1/2" **)	n/a	ACI Temp only*	ACI Temp only*
TR-50	6" or (4 1/2" **)	n/a	ACI Temp only*	ACI Temp only*
TR-75	6" or (4 1/2" **)	n/a	ACI Temp only*	ACI Temp only*

<sup>\*</sup> The floor must be properly aged to American Concrete Institute specifications. The floor does not require reinforcement, but a minimum of wire mesh is recommended.

The floor should be test drilled to verify minimum floor thickness and to confirm building drawings. A core sample should be obtained and tested to verify minimum floor compressive strength. When investigating floor properties, consult building drawings to verify proper floor reinforcement.

All 2-post lifts require a continuous single slab. Spanning expansion seams or positioning posts on separate slabs is not acceptable.

#### --- ALL MOHAWK LIFTS MUST BE INSTALLED ON CONCRETE ONLY ---

**DO NOT** install any Mohawk lift on any surface other than concrete, conforming to the minimum compressive strength, aging, reinforcement, and thickness stated in the table above.

**DO NOT** install any Mohawk lift on expansion seams or on cracked or defective concrete. All ¾ inch diameter anchors must be a minimum of 6 inches away from any expansion seams, control joints or other inconsistencies in the concrete. All 1 inch diameter anchors must be a minimum of 7 ½ inches away from any expansion seams, control joints or other inconsistencies in the concrete. Refer to anchor manufacturer specifications for specific information concerning edge distances and bolt to bolt distance requirements.

NEVER, NEVER install a Mohawk lift on hand mixed concrete.

**DO NOT** install any Mohawk lift on a secondary floor level or on any ground floor with a basement beneath without written authorization from the building architect and prior consultation and approval from Mohawk Resources Ltd.

If the floor does not meet these minimum pre-existing floor requirements, it is suggested to construct a slab as outlined in *New Slab Recommendations*. If the location of the lift is in a seismic zone, contact Mohawk Resources Ltd. for seismic slab designs.

File: Pre-Existing Floor-Requirements.doc

Rev Date: 6/1/2006

<sup>\*\*</sup> Larger 4' x 4' base pads (available from Mohawk) required for floors with a thickness range less than 6", but greater or equal to 4 1/2".

#### **New Slab Recommendations:**

The information contained in this appendage supercedes any other information given in the accompanied manual. This information is presented for design recommendations for a new concrete slab in the event that the pre-existing floor does not meet minimum requirements of the applicable lift type. Please read all instructions below carefully before producing new slab.

#### **Basic Concrete Requirements:**

Minimum Tensile Strength of Concrete: 4,000 P.S.I.

Minimum Aging of New Concrete Slab: 28 days (cure time)

Minimum Thickness of Concrete Slab: See New Slab Table & Figure Attached

Minimum Width and Length of Slab: See New Slab Table & Figure Attached

All properties of the new concrete slab are mandatory and must conform to the above stated properties before installation of the lift is deemed acceptable. The new slab must be totally surrounded by an existing concrete floor. Certified strength documentation should be obtained from the firm who supplies the concrete mixture at the time of the pour.

The slab above is designed as "stand alone" and does not take into account the contribution of strength from surrounding concrete. It may be desirable to reinforce the new slab to the pre-existing surrounding floor. Care should be taken to locate these specific reinforcement bars away from any anchor positions of the specific lift.

This new slab design does not account for second floor installations or installations in a ground floor with a basement beneath. For this case, the lift should not be installed without written authorization from the building architect.

All ¾ inch diameter anchors must be a minimum of 6 inches away from any expansion seams, control joints or other inconsistencies in the concrete. All 1 inch diameter anchors must be a minimum of 7 ½ inches away from any expansion seams, control joints or other inconsistencies in the concrete. Refer to anchor manufacturer specifications for specific information concerning edge distances and bolt to bolt distance requirements.

NEVER, NEVER, hand mix your own concrete.

Rev: 6/7/06

File: New-Slab.doc

#### **New Slab Recommendations**

File: New-slab.xls Rev Date: 5/16/2012

#### NEW SLABS MUST BE 12" THICK MINIMUM !! (See Notes Below)

Lift Model	W Slab Width, (Inches)	L Slab Length, (Inches)	R Reinforcement Size, (Inch) (See Note 1 & 2)	S1 & S2 Reinforcement Spacing, (Inch) (See Note 3)	D Wej-it Dia, (Inch)	l Wej-it Length, (Inch)
A-7	48" Min	144" Min	8 - #4 - Main Bars 21 - #4 - Temperature Bars	6 in - Long Bars 8 in - Short Bars	3/4 in	5 in
System IA	48" Min	161" Min	8 - #4 - Main Bars 21 - #4 - Temperature Bars	6 in - Long Bars 8 in - Short Bars	3/4 in	5 in
System IA-10	48" Min	161" Min	8 - #4 - Main Bars 21 - #4 - Temperature Bars	6 in - Long Bars 8 in - Short Bars	3/4 in	5 in
LC-12	72" Min	168" Min	12 - #4 - Main Bars 23 - #4 - Temperature Bars	6 in - Long Bars 8 in - Short Bars	3/4 in	6 in
LMF-12	72" Min	168" Min	12 - #4 - Main Bars 23 - #4 - Temperature Bars	6 in - Long Bars 8 in - Short Bars	3/4 in	6 in
TP-15	72" Min	168" Min	12 - #4 - Main Bars 23 - #4 - Temperature Bars	6 in - Long Bars 8 in - Short Bars	3/4 in	6 in
TP-16	72" Min	168" Min	12 - #4 - Main Bars 23 - #4 - Temperature Bars	6 in - Long Bars 8 in - Short Bars	3/4 in	6 in
TP-18 (2012)	72" Min	168" Min	12 - #4 - Main Bars 23 - #4 - Temperature Bars	6 in - Long Bars 8 in - Short Bars	3/4 in	6 in
TP-20	72" Min	186" Min	18 - #4 - Main Bars 24 - #4 - Temperature Bars	4 in - Long Bars 8 in - Short Bars	3/4 in	6 in
TP-20-WB	72" Min	186" Min	18 - #4 - Main Bars 24 - #4 - Temperature Bars	4 in - Long Bars 8 in - Short Bars	3/4 in	6 in
TP-26	72" Min	198" Min	18 - #4 - Main Bars 24 - #4 - Temperature Bars	4 in - Long Bars 8 in - Short Bars	1 in	10 in
TP-26-WB	72" Min	220" Min	18 - #4 - Main Bars 24 - #4 - Temperature Bars	4 in - Long Bars 8 in - Short Bars	1 in	8 in
TP-30	72" Min	198" Min	18 - #4 - Main Bars 24 - #4 - Temperature Bars	4 in - Long Bars 8 in - Short Bars	1 in	10 in
TP-30-WB	72" Min	220" Min	18 - #4 - Main Bars 24 - #4 - Temperature Bars	4 in - Long Bars 8 in - Short Bars	1 in	8 in
TR-19 *	24" Min	24" Min	4 - #4 Bars 8 Bars Total	6 in - Each Way	3/4 in	5 in
FL-25 *	24" Min	24" Min	4 - #4 Bars 8 Bars Total	6 in - Each Way	3/4 in	5 in
TR-25 *	24" Min	24" Min	4 - #4 Bars 8 Bars Total	6 in - Each Way	3/4 in	5 in
TR-30 *	48" Min	48" Min	4 - #4 Bars 8 Bars Total	6 in - Each Way	3/4 in	5 in
TR-33 *	72" Min	72" Min	12 - #4 Bars 24 Bars Total	6 in - Each Way	3/4 in	5 in
TR-35 *	72" Min	72" Min	12 - #4 Bars 24 Bars Total	6 in - Each Way	3/4 in	5 in
TR-50 *	72" Min	72" Min	12 - #4 Bars 24 Bars Total	6 in - Each Way	3/4 in	5 in
TR-75 *	72" Min	72" Min	12 - #4 Bars 24 Bars Total	6 in - Each Way	3/4 in	5 in


<sup>\*</sup> Four Separate Slabs Formed at each Post.


- Note 1: An additional layer of 6 x 6 10/10 WWF at mid height of new slab would be advisable in any extremely hot or cold climate to control cracking due to temperature fluctuations and shrinkage.

  At anchor bolt locations only keep WWF mesh below the elevation of the anchorage to avoid drilling interference with the wire.
- Note 2: The main reinforcing and lower temperature steel shall be Grade 60 deformed bars
- Note 3: The tolerance on spacing of the bars in each direction shall be the value shown, plus or minus 1 inch. In addition, the number of bars specified in the table must be used.
- Note 4: The concrete outline dimensions and the reinforcing shown are for a foundation bed allowable bearing

#### NEW RECOMMENDED SLAB DESIGN FOR 2-POST LIFTS


FILE: MANO66 DATE: 2/98 REV DATE: 7/2003

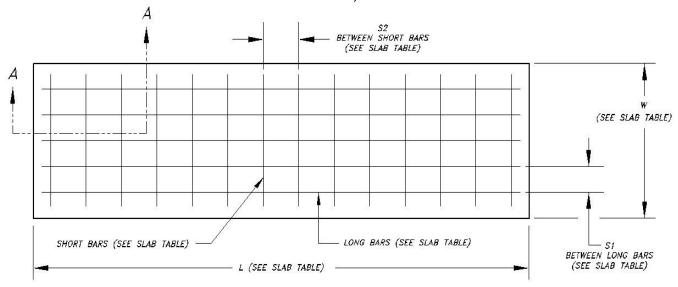


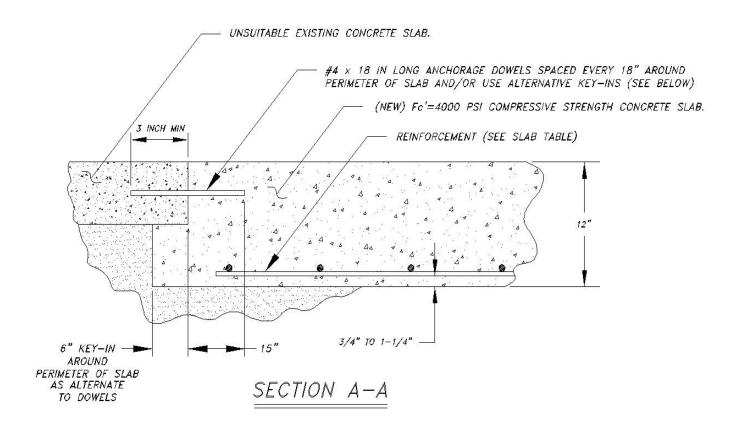


#### NEW RECOMMENDED SLAB DESIGN FOR 4-POST LIFTS

FILE: MANO89 DATE: 10/00 REV DATE: 7/2003

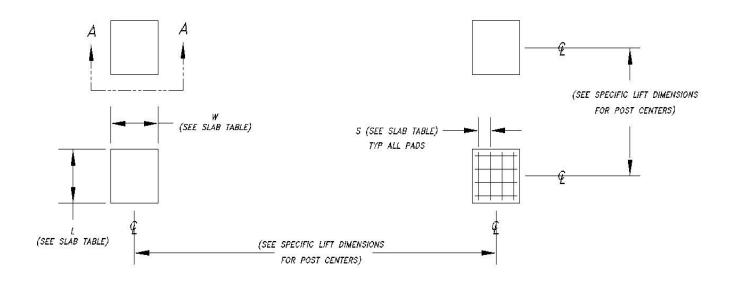

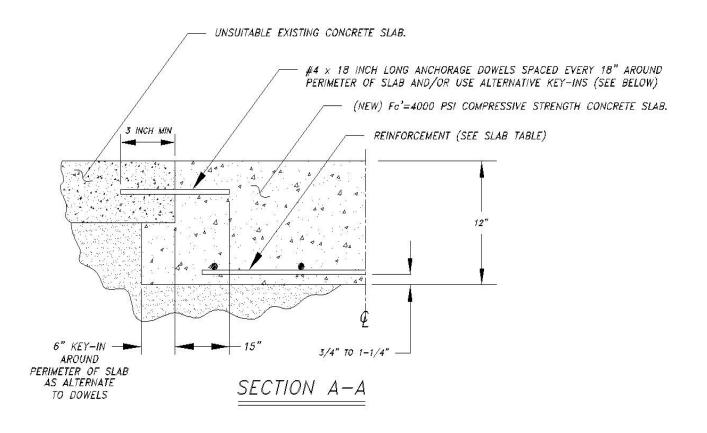

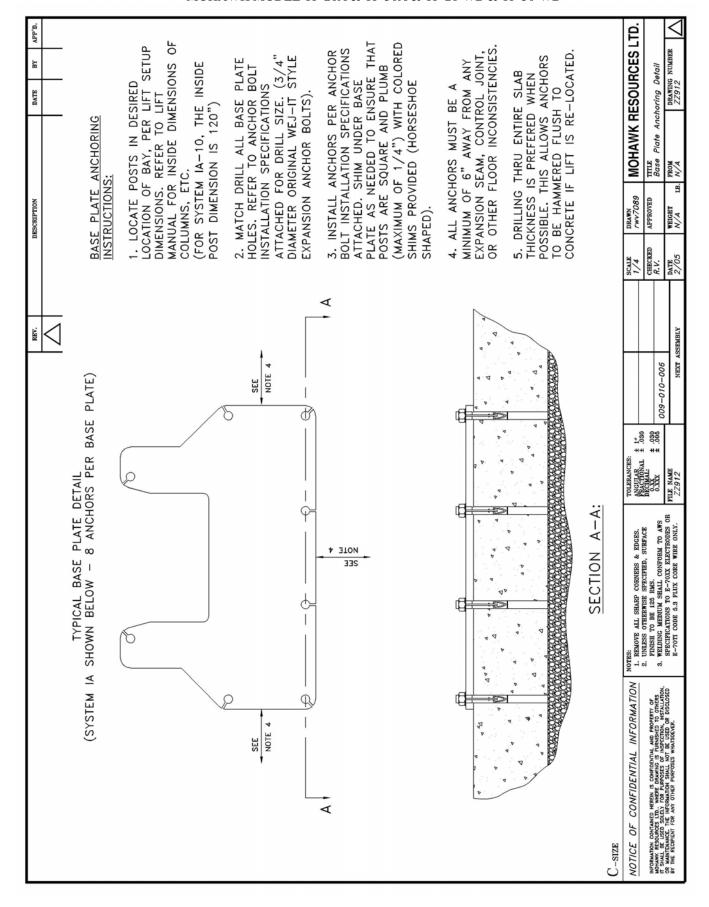



#### The Original wej-it Wedge Anchors

#### **KEY FEATURES/BENEFITS**

■ Time-Tested, Pr ven Reliability. An industry standard for over 45 years.



- Fully Assembled and Ready to Use. Unparalleled job-site convenience.
- BOLT SIZE IS HOLE SIZE.® Allows precision placement of equipment through pre-drilled holes.
- Exclusive "Positive Wedge Connections." Minimizes wedge loosening due to vibratory loads.

#### SPECIFICATIONS, APPROVALS AND LISTINGS


Түре				
Zinc Plating	ASTM B-633, Type III, SCI			
ICBO-ES	Report #1821			
City of Los Angeles	#RR 24939			
DOT	Please call Customer Service for			
	specific information by state.			
Federal	QQZ-325C, Type II, Class 3			
Specifications	(Clear Chromate added)			
	FFS-325, Group II, Type 4, Class 1			

#### MAXIMUM TENSILE AND SHEAR CAPACITY FOR STATIC LOADS

	Limestone Unreinforced Stone Aggregate oncrete								Unreinforced				
		Aggregat	E		ZIN PLATED ARBON STEEL							tweight (I	DEALITE)
Anchor	Embed-	2000	) psi	Embed-	300	0 psi	5000 psi		5000 psi 7000 psi		Embed-	5000	psi
& Hole	ment	Tension	Shear	ment	Tension	Shear	Tension	Shear	Tension	Shear	ment	Tension	Shear
Size	(in)	(lbs)	(lbs)	(in)	(lbs)	(lbs)	(lbs)	(lbs)	(lbs)	(lbs)	(in)	(lbs)	(lbs)
3/4	•	•	•	3	11579	15537	19299	21000	27019	23103	3 1/2	17293	19050
3/4	•	•	•	7	15444	15537	25740	21000	36036	23103	•	•	•
1	•	•	•	5 1/2	16351	•	27252	33083	38153	35700	4 1/2	21616	31666
1	•	•	•	7	17837	•	29728	33083	41619	35700	•	•	•
Source		1					2					2	

Sources (available upon request): 1) University of Texas, Austin, TX (using new ICBO-ES testing criteria); 1993. 2) AA Engineers & Associates, Inc., Denver, O; 1981.

#### LENGTH SELECTION GUIDE

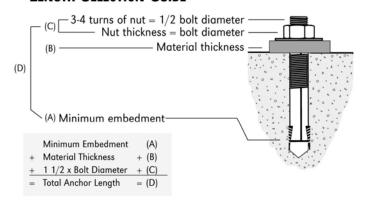



#### **EDGE DISTANCE AND SPACING REQUIREMENTS**

Embedment (E) in	Spacing	Edge Distance
Anchor Diameters (d)		
E < 6d (shallow)	3.50E	1.75E
$6d \le E \le 8d \text{ (standard)}$	2.00E	1.00E
8d < E (deep)	1.50E	0.75E

#### Notes:

- Information provided only for the use of a qualified design engineer. Use of technical data by persons not qualified could cause serious damage, injury, or even death.
- Ultimate values shown. For static loads, use one-fourth of the maximum tensile and shear capacities for the recommended 4:1 safety factor.

#### INSTALLATION INSTRUCTIONS - MOHAWK LIFTS

- Drill the hole perpendicular to the work surface.\* The drill bit diameter will be the same as the
  anchor diameter that you are installing. To assure full holding power, do not ream the hole or allow
  the drill to wobble. Ensure all holes are a minimum of 6 inches away from any
  cracks, seams or defects in the concrete.
- 2. Drill the hole 1 diameter deeper than the intended embedment of the anchor, but not closer than two diameters to the bottom (opposite) surface of the concrete.
- 3. Clean the hole using compressed air and a nylon brush. A clean hole is necessary for proper performance.
- For ease of installation, make certain that the spear heads are located up against the wedge pockets.
- **5.** Turn the nut onto the anchor until contact is made with the top of the spears and the bottom of the washer. Insert anchor into hole.
- 6. Tap anchor into hole with a 2 ½ lb. hammer until the washer rests solidly against the base plate.
- 7. Tighten the nut from 1 ½ to 3 turns past hand tight position to estimated installation torque below. Use of an Impact wrench for Installation of the anchor is NOT recommended.

#### **TORQUE VALUES**

Anchor Diameter (in) 3/4	Drill Bit Diameter (i 3/4 1	Estim n) Instal 75 130	ated I Torque (ft-lb)	
Ĺ	1-2	3		4-6
				dini)

#### INSPECTION & MAINTENANCE INSTRUCTIONS

- 1. Verify torque on anchors to 70 ft-lbs for 3/4 anchors and 120 ft-lbs for 1" anchors for future/annual inspections.
- \* Always wear safety glasses. Follow the drill manufacturer's safety instructions. Use only solid carbide-tipped drill bits meeting ANSI B212.15 diameter standards as listed on back cover.

  REV: 11/07

9





Position vehicle with center of gravity midway between adapters.





Avoid excessive rocking of vehicle while on lift.

#### **WARNING**

0



WARNING

Do not override self-closing lift controls.



Keep feet clear of lift while lowering.

The messages and pictographs shown are generic in nature and are meant to generally represent hazards common to all automotive lifts regardless of specific style.

0

Funding for the development and validation of these labels was provided by the Automotive Lift Institute, PO Box 33116 Indialantic, FL. 32903.

They are protected by copyright. Set of labels may be obtained from ALI or its member companies.

© 1992 by ALI, Inc.


ALI/WL101w



Lift to be used by trained operator only.







Use vehicle manufacturer's lift points.

### **A** CAUTION



Always use safety stands when removing or installing heavy components. ©

#### **A** CAUTION



Use height extenders when necessary to ensure good contact. 0

#### **A** CAUTION



Auxiliary adapters may reduce load capacity.

The messages and pictographs shown are generic in nature and are meant to generally represent hazards common to all automotive lifts regardless of specific style.

Funding for the development and validation of these labels was provided by the Automotive Lift Institute, PO Box 33116 Indialantic, FL. 32903.

They are protected by copyright. Set of labels may be obtained from ALI or its member companies.

© 1992 by ALI, Inc.

ALI/WL101c

(C)





**Because Quality Lasts Forever.** 



#### Model USL-6000

Full rise, space-saving, no-post, portable scissors lift, offers full under-car access.



The A-7 is a 7,000 lb. capacity asymmetric lift that allows full opening of

all vehicle doors as well as total undercar/underdash access, thanks to Mohawk's unique "clear-floor" design. Low 4" arms accommodate all imports and low-riding sports cars. Includes both 3" and 6" truck adapters.


Model LMF-12

#### **Model System I**

The 9.000 lb. capacity System I, like all Mohawk lifts, features Mohawk's patented hydraulic equalization system with adjustable overhead (or optional underground) hydraulic lines. Offers low 3 1/2" swing arms and comes standard with truck adapters.

#### Model LMF-12, TP-15, TP-18, TP-26 & TP-30

These 12,000 to 30,000 lb. capacity models are the ideal heavy-duty lifts for up to Class VI trucks. Mohawk's unique "clear floor" design makes these the perfect lifts for all fleet applications. Truck adapters are standard equipment.



**TR-Series Ramp Style Lifts** 

Standard models from 25,000 up to 125,000 lbs. for total under-vehicle access.

Ramp lengths from 20' to 50'. Completely operated by a single technician, and features fully interlocked, redundant safety systems.

Mohawk Industrial Park • P.O. Box 110

Amsterdam, NY 12010 1-800-833-2006 or 518-842-1431 FAX 518-842-1289



www.mohawklifts.com

#### SEND US YOUR PHOTOS!

MOHAWK IS ALWAYS INTERESTED IS SEEING HOW YOUR LIFTS ARE USED. WE HAVE CREATED AN ON-LINE PHOTO DATABASE FOR CUSTOMERS TO VIEW OUR LIFTS IN USE.









VISIT <u>WWW.MOHAWKLIFTS.COM/PR/</u> AND MAYBE WE CAN ADD YOUR PHOTOS TO OUR COLLECTION. (JPG FORMATS PREFERED)

E-MAIL YOUR PHOTOS AND COMMENTS TO: PHOTOS@MOHAWKLIFTS.COM BEST REGARDS & HAPPY LIFTING! YOUR FRIENDS AT MOHAWK LIFTS