


MODEL ML-220XL SPECIFICATIONS

Model:	ML-220XL
Capacity:	20,000 lbs.
Motor Rating:	3 HP/208-230V, Single-phase (3Ø optional)
Synchronization:	Direct drive hydraulic fluid displacement using no chains, cables, or overhead obstructions
Arm Pad Height:	5' 11 1/16" min.
Lifting Height (stroke):	73" (6') under arm
Arm Pad Height @ Full Rise:	7' 2 1/4" (86.2")
Overall Width:	12' 7 1/2" (151.5") adjustable
Width Between Posts:	Adjustable 9' 6" to 10' (114" to 120")
Width Between Lifting Arms:	103.81" adjustable
Column Height:	10' (120")
Max. Cylinder Height:	13' 6" (162")
Overhead Hydraulic Line Height:	15' (180") Standard (adjustable to accommodate any height ceiling or routed in-floor)
Weight:	4,100 lbs.
Concrete Floor Requirements:	Standard Base: 6 1/2" of 4,000 psi concrete Wide Base: 5 1/2" of 4,000 psi concrete
Anchoring System: Included	(16) 3/4" x 6" bolts
Mechanical Safety Locks:	Automatic; multi-position starting @ 5" off the floor
Hydraulic Safety Systems:	Automatic; all position
Swing Arm Restraints:	Automatic upon ascent
Cylinders:	2 (1 per column)
Drive System:	Direct drive (using no cables or chains)
Lifting Speed:	90 seconds (faster with lighter load)
3" Frame Adaptors (stackable):	4 included as standard equipment
6" Frame Adaptors (stackable):	4 included as standard equipment
Spin-Up Adjustable Pad:	4 included as standard equipment
Steel Carriage Bearings:	(16) 4" diameter (8 per carriage) double sealed, self-lubricating ball bearing rollers
Floor Access Between Posts:	Clear and unobstructed
Warranty:	25 years structural, 10 year mechanical, plus limited lifetime cylinder seal warranty

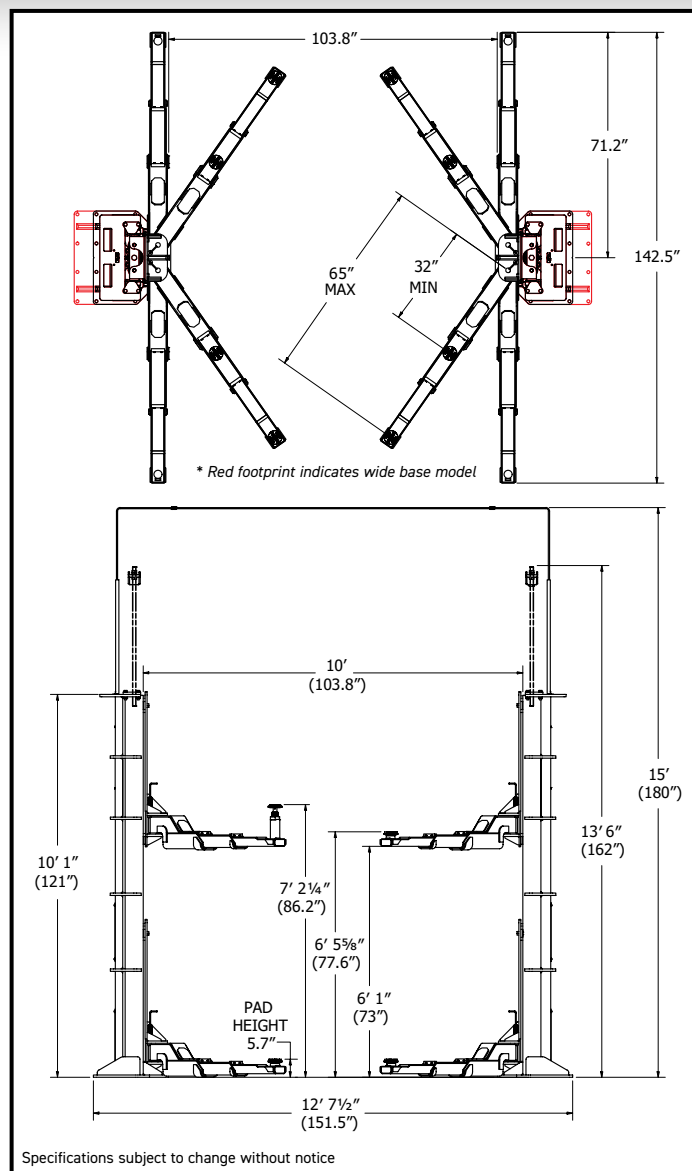

Scan the QR code to learn how Mohawk's two post vehicle lifts compare to the competition. mohawklifts.com/dare2compare

MOHAWK LIFTS

Mohawk Lifts, LLC.
P.O. Box 110
65 Vrooman Ave
Amsterdam, NY 12010
(800) 833-2006
(518) 842-1431
FAX: (518) 842-1289
www.mohawklifts.com

AVAILABLE UNDER DISCOUNTED GOVERNMENT
CONTRACT IN ALL 50 STATES



DISTRIBUTED BY: