



MODEL TP-16-3SA SPECIFICATIONS

Model:	TP-16-3SA
Capacity:	16,000 lbs. (7257.49 Kg)
Lifting Speed:	60 seconds (faster with lighter load)
Motor Rating:	4 HP/208-230V, Single-phase (3Ø optional)
Synchronization:	Hydraulic fluid displacement using no chains, cables, or overhead obstructions
Arm Pad Height:	5" (12.7 cm) min.
Lifting Height:	6' (1.83 m) under arm
Arm Pad Height @ Full Rise:	6'5" (1.96 m)
Max. Arm Pad Height with Adaptors:	7'3" (2.21 m)
Overall Width:	12' 7½" (3.85 m) (adjustable)
Width Between Posts:	10' (3.05 m) (adjustable 114-120")
Width Between Lifting Arms:	8' 9½" (2.69 m) (adjustable)
Column Height:	8' 7" (2.62 m)
Max. Cylinder Height:	13'6" (4.11 m)
Overhead Hydraulic Line Height:	15' (4.57 m) Standard (adjustable to accommodate any height ceiling or routed in-floor)
Weight:	3600 lbs. (1632.96 Kg)
Concrete Floor Requirements:	Wide Base: 5½" of 4,000 psi concrete Standard Base: 6½" of 4,000 psi concrete
Anchoring System: Included	(16) ¾"x6" (1.91x15.24 cm) bolts
Mechanical Safety Locks:	Automatic; multi-position starting @ 5" (12.7 cm) off the floor
Hydraulic Safety Systems:	Automatic; all position
Swing Arm Restraints:	Automatic upon ascent
Cylinders:	2 (1 per column)
Drive System:	Direct drive (using no cables or chains)
5" Frame Adaptors (stackable):	4 included as standard equipment
7½" Frame Adaptors (stackable):	4 included as standard equipment
10" Frame Adaptors (stackable):	4 included as standard equipment
Steel Carriage Bearings:	(16) 4" (10.16 cm) diameter (8 per carriage) double sealed, self-lubricating ball bearing rollers
Floor Access Between Posts:	Clear and unobstructed
Warranty:	25 years structural, 10 year mechanical, plus limited lifetime cylinder seal warranty

Mohawk builds the best products with the finest materials, to the highest standards. Just compare our lifts. Our staff will assist you with a fleet evaluation, design assistance and answer any technical questions you have. We invite your calls.

Mohawk lifts are manufactured in compliance with the following standards: ALI, ANSI, ASME, AISI, ASTM, ASA, NEC, AWG, NEMA.

MEETS CURRENT NATIONAL ANSI (ANSI/ALI ALCTV) CODE FOR LIFTS.

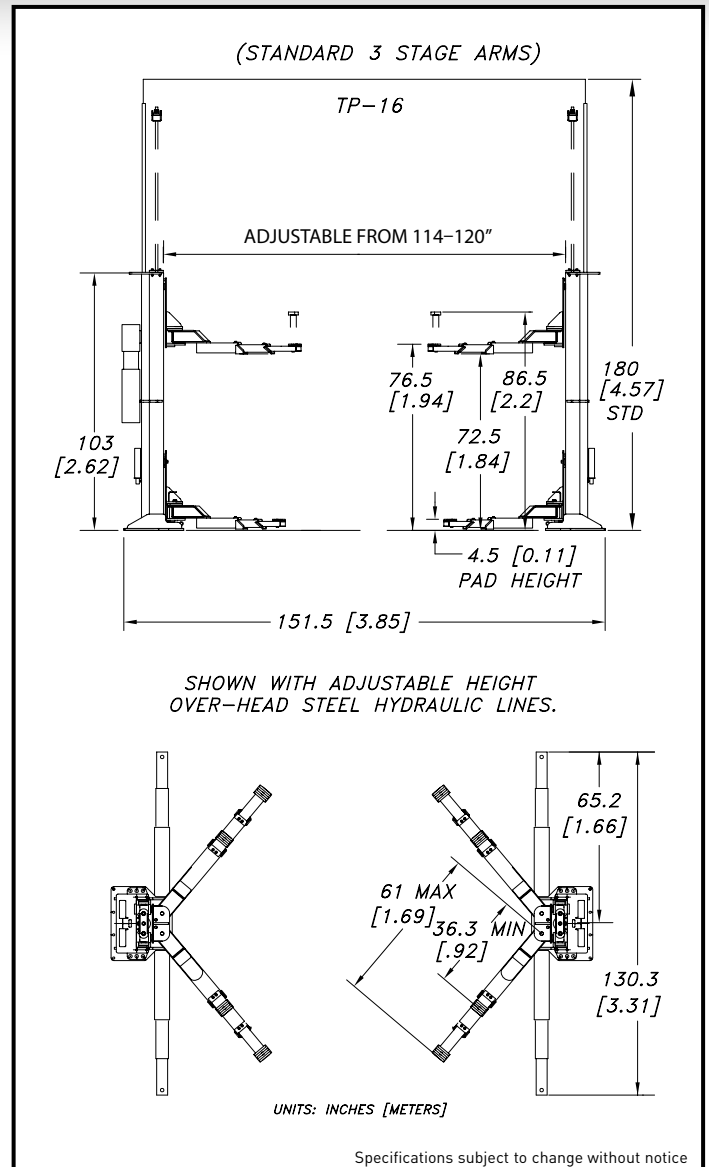

For more detailed product information read this book at
www.mohawklifts.com/wmamam



www.facebook.com/mohawklifts

MOHAWK LIFTS

Mohawk Lifts, LLC.
P.O. Box 110
65 Vrooman Ave
Amsterdam, NY 12010
(800) 833-2006
(518) 842-1431
FAX: (518) 842-1289
www.mohawklifts.com

AVAILABLE UNDER DISCOUNTED GOVERNMENT
CONTRACT IN ALL 50 STATES



Contract Holder
Contract #: GS-DTF-207AA



SUPPLIER PARTNER



DISTRIBUTED BY: