

MODEL TR-19

4-POST TRACK LIFT CAPACITY: 19,000 LBS




MOHAWK RESOURCES LTD.

P.O. BOX 110

65 VROOMAN AVENUE AMSTERDAM, NY 12010

PHN: (800) 833-2006 IN NY: (518) 842-1431 FAX: (518) 842-1289



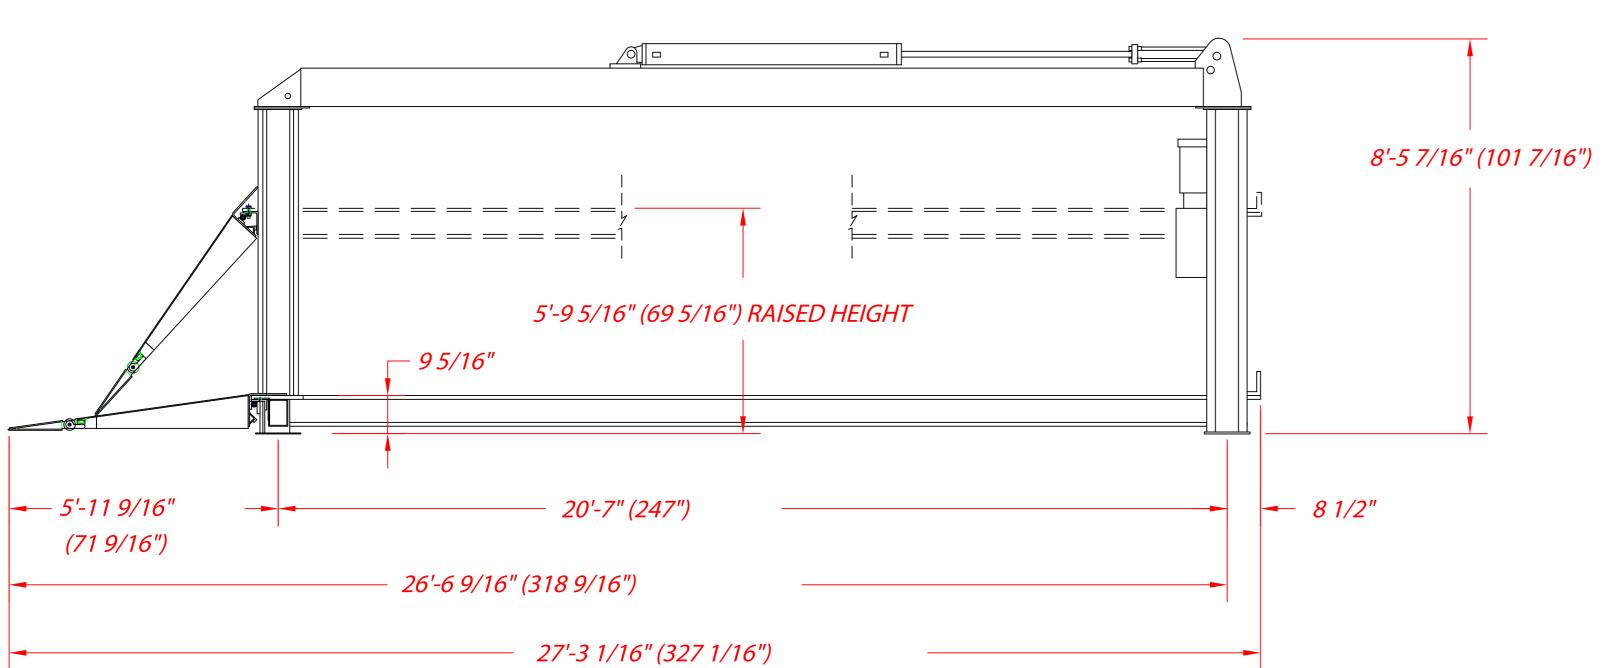

SPECIFICATIONS:		
CAPACITY	. — — — — — — — — — — — — — — — — — 19),000 LB
LIFTING SPEED	- — — — — — — — — — — — — — — — — — 120 SEG	CONDS
MOTOR RATING ——————	2 HP, 208-230 VAC SINGLE PHASE (3 PHASE OPTIONAL)	
LIFTING MECHANISM ——————	– – 5" HYDRAULIC CYLINDER ATTACHED TO (4) #646 LEAF CHAINS	
OVERALL LENGTH ——————		1/16"
OVERALL WIDTH		3/16"
LIFTING STROKE ———————		5'
TRACK WIDTH ———————		- <i> 24"</i>
CLEARANCE BETWEEN POSTS ———		- 11'-0"
MECHANICAL SAFETY RELEASE ——	——————————————————————————————————————	E POINT
MECHANICAL SAFETY LOCKS ———	ALL PC	OSITION
BACK-UP HYDRAULIC SAFETY SYSTEMS	————————— P.C. FLOW CONTROLS & VELOCITY FUSES	
WEIGHT		5250 LB
AVAILABLE OPTIONS ——————	− − − 3 PHASE POWER FOR 208-230, OR 440-480 VAC @ 60 HZ	
	——————————— RJ-15, ROLLING HYDRAULIC JACKING BEAM	
		IN PAN
·	—————— DRIVE THROUGH RA	AMPS

SHOWN ABOVE WITH STANDARD 20' TRACKS

NOTE: MOHAWK RESOURCES, LTD. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.

NOTICE OF CONFIDENTIAL INFORMATION

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPERTY OF MOHAWK RESOURCES LTD.. WHERE DRAWING IS FURNISHED TO OTHERS IT SHALL BE USED SOLELY FOR PURPOSES OF INSPECTION, INSTALLATION, OR MAINTENANCE. THE INFORMATION SHALL NOT BE USED OR DISCLOSED BY THE RECIPIENT FOR ANY OTHER PURPOSES WHATSOEVER.

1. REMOVE ALL SHARP CORNERS & EDGES.
2. UNLESS OTHERWISE SPECIFIED, SURFACE

FINISH TO BE 125 RMS.

3. WELDING MEDIUM SHALL CONFORM TO AWS

SPECIFICATIONS TO E-70XX ELECTRODES OR

E-70TI CODE 5.3 FLUX CORE WIRE ONLY.

TOLERANCES: ANGULAR FRACTIONAL	±1 ° ±.030			SCALE <i>NONE</i>
DECIMAL: 0.XX 0.XXX	± .030 ± .005			CHECKED
FILE NAME TR-19		NEXT ASSE	MBLY	DATE 3/00

DRAWN R.V.	MOHAWK RESOURCES LTD.
APPROVED	TITLE

DATE WEIGHT FROM DRAWING NUMBER 7R-19

NEXT ASSEMBLY 3/00 5250 LB.