
## MODEL ML-220 SPECIFICATIONS

Model:	ML-220
Capacity:	20,000 lbs. (9000 Kg)
Motor Rating:	4 HP/208-230V, Single-phase (3ø optional)
Synchronization:	Hydraulic fluid displacement using no chains, cables, or overhead obstructions
Arm Pad Height:	4.5" (11.43 cm) min.
Lifting Height:	6' (1.83 m) under arm
Arm Pad Height @ Full Rise:	6'5" (1.96 m)
Max. Arm Pad Height with Adaptors:	7'3" (2.21 m) (includes 5", 7½" and 10" stackable lift adaptor pads)
Overall Width:	12' 7½" (3.85 m) ( <b>adjustable</b> )
Width Between Posts:	10' (3.05 m) ( <b>adjustable 114-120"</b> )
Width Between Lifting Arms:	8' 9%" (2.69 m) ( <b>adjustable</b> )
Column Height:	8' 7" (2.62 m)
Max. Cylinder Height:	13'6" (4.11 m)
Overhead Hydraulic Line Height:	15' (4.57 m) Standard ( <b>adjustable</b> to accommodate any height ceiling or routed in-floor)
Weight:	4100 lbs. (1859.73 Kg)
Concrete Floor Requirements:	Wide Base: 5½" of 4,000 psi concrete Standard Base: 6½" of 4,000 psi concrete
Anchoring System: Included	(16) ¾"x6" (1.91x15.24 cm) bolts
Mechanical Safety Locks:	<b>Automatic</b> ; multi-position starting @ 5" (12.7 cm) off the floor
Hydraulic Safety Systems:	Automatic; all position
Swing Arm Restraints:	Automatic upon ascent
Cylinders:	2 (1 per column)
Drive System:	Direct drive (using no cables or chains)
Lifting Speed:	90 seconds (faster with lighter load)
5" Frame Adaptors (stackable):	4 included as standard equipment
7½" Frame Adaptors (stackable):	4 included as standard equipment
10" Frame Adaptors (stackable):	4 included as standard equipment
Steel Carriage Bearings:	(16) 4" (10.16 cm) diameter (8 per carriage) double sealed, self- lubricating ball bearing rollers
Floor Access Between Posts:	Clear and unobstructed
Warranty:	25 years structural, 3 year mechanical,



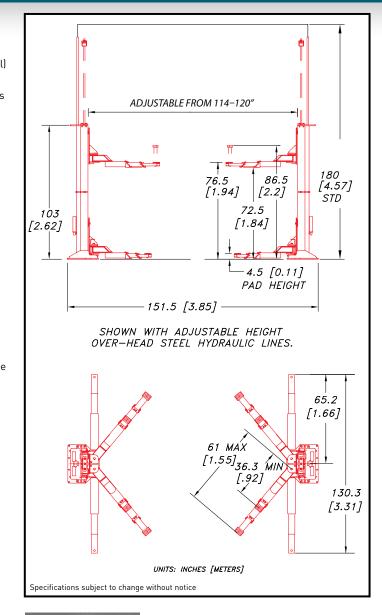

Learn how our two post vehicle lifts compare to the competition. mohawklifts.com/dare2compare

Mohawk builds the best products with the finest materials, to the highest standards. Just compare our lifts. Our staff will assist you with a fleet evaluation, design assistance and answer any technical questions you have. We invite your calls.

## **MOHAWK LIFTS**

Mohawk Lifts. LLC. P.O. Box 110 65 Vrooman Ave Amsterdam, NY 12010 (800) 833-2006 (518) 842-1431 FAX: (518) 842-1289

Sourcewell 💥

equalis

Contract Holder

AVAILABLE UNDER DISCOUNTED GOVERNMENT

**CONTRACT IN ALL 50 STATES** 

plus limited lifetime cylinder seal warranty





**DISTRIBUTED BY:**